

STRIPLITE SL 4000

Energy efficient LED enclosure lights

UNIVERSAL USE

Wide voltage range
24 V- 265 V AC / DC

MOTION SENSOR

Switches off after 5 minutes

TOUGH HOUSING

Polycarbonate housing prevents
damage in normal operation

ON/OFF SWITCH

DAISY CHAIN

Via daisy chain cables multiple lamps
can be connected

CONNECTOR OPTIONS

Wieland or pushfit connector

MOUNTING

Integrated magnets or plastic clips

PUSH TO RELEASE

Applies to both connection options





STRPLITE	SL-4000	SL-4007
Order no. with motion sensor, Wieland	400000	400076
Order no. with motion sensor, Pushfit	400400	n/a
Order no. with ON/OFF switch, Wieland	400100	400176
Order no. with ON/OFF switch, Pushfit	400500	n/a
PERFORMANCE DATA		
Power consumption	4 Watt	8 Watt
Light output	400 Lm	700 Lm
Light colour / temperatur	Cool white / 6,500K	
Lamp type	LED, angle 120°	
Life time (@ 20°C)	50,000 hrs.	
Operating temperature range	-30°C - 70°C / -22°F - 158°F	
Switch off time (motion sensor)	5 min.	
DIMENSIONS		
Dimensions (L x W x H)	357.4 x 32 x 35.5 (31.16) mm 14.97 x 1.26 x 1.40 (1.23) in.	
Housing material	PC clear (top) PC blue (base)	PC forsted (top) PC blue (base)
Weight	140 gr. / 0.30 lbs.	
ELECTRICAL DATA		
Nennspannung / Frequenz	24 - 265 V AC/DC ~ 50/60 Hz	120 - 230 V 50/60 Hz
Protection class	II (double insulated)	
IP protection to IEC 60 529	IP 20	
Mounting	Magnets, clips	
Max. number of lights to be connected	16	12
Certification	CE, cURus	

MAIN FEATURES

- Combined AC & DC voltage range allows the universal use with a single model
- Motion sensor or rocker switch available
- Various fitting options for more flexibility
- Daisy chain cables available to connect multiple lights
- Wieland or push fit connector for fast and easy installation

Light distribution curve

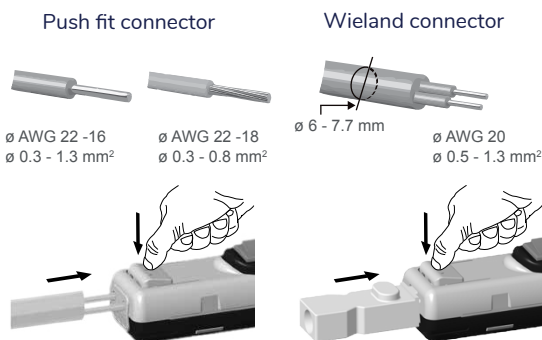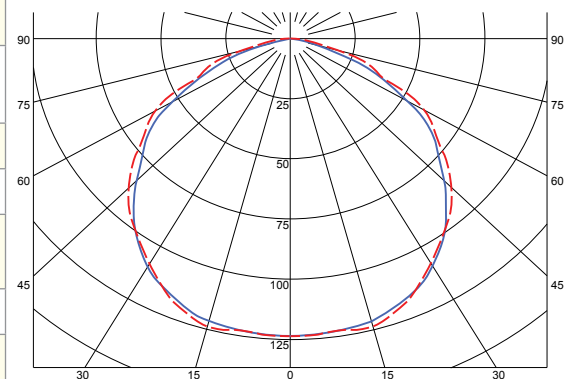

DAISY CHAIN INSTALLATION



Daisy chain cables available to connect multiple lights