

Filter Fan



Description


Order Number:	4830A4000
Brand Name:	SOLIFLEX
Color:	RAL 7035
Housing Material:	ABS Plastic
Ingress protection:	IP 54, Type 12, 3R
Optional:	Different housing colours available on request With NEMA 3R protection part no. 4830A4030
Approvals:	CE, cURus, cULus

Technical data


Operating temperature range:	14°F - +131°F
Air volume flow unimpeded:	306 cfm / 340 cfm
Static pressure:	0.64 inH ₂ O @ 5 0Hz 0.76 inH ₂ O @ 60 Hz
Dimension H x W x D:	12.8 x 12.8 x 6.3 inch
Weight:	6.8 lbs
Cut out dimensions:	11.5 x 11.5 (+0.06) inch
Voltage / Frequency:	230 V ~ 50/60 Hz
Rated current:	0.31 A / 0.35 A
Power consumption:	70 W / 85 W
Degree of separation:	85% - DIN 24185
Wall thickness:	0.06 - 0.10 in.
Filter class:	G3 according to EN 779
Installation:	Elastic clips
Noise level:	65.3 dB(A) @ 50 Hz 68.1 dB(A) @ 60 Hz

Air flow:

Q = Air flow [m³/h]
P = Static pressure [Pa]

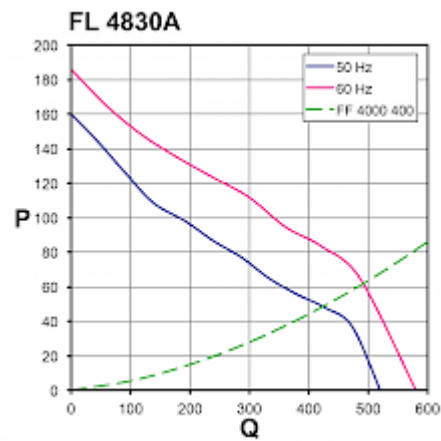

Cut out dimensions:

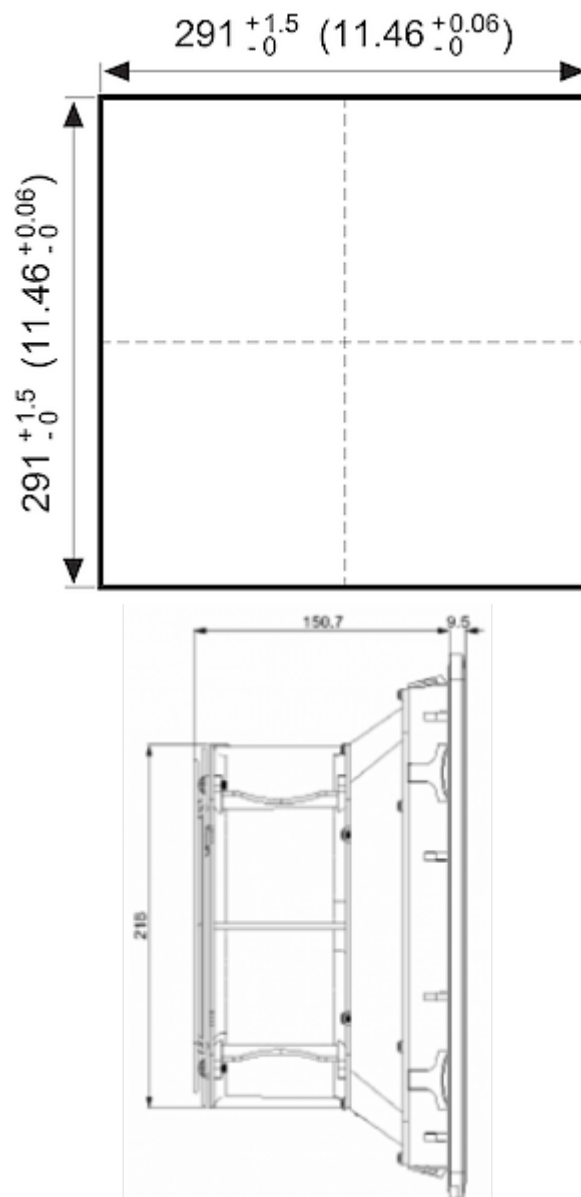

Order Information

In RAL 9005	4830A4003
With NEMA 3R protection part no.	4830A4033
Taric code	84145915
GTIN (EAN)	5350604100602