

Filterless enclosure air conditioner



Description

Order Number: 4271202

Brand Name: SLIMLINE

Housing Material: Stainless steel AISI 304 (V2A)

Ingress protection: TYPE 12


Note: Bei 400 V / 3~ Geräten ist kein zusätzlicher Mittelpunktleiter erforderlich.

Approvals: CE / cURus


Technical data

Cooling capacity 95F/95F:	3020 BTU
Cooling capacity 95F/122F:	1810 BTU
Compressor type:	Rotary piston compressor
Refrigerant / GWP:	R134a / 1430
Refrigerant charge:	280 g / 9.9 oz
High / low pressure:	37 / 9.6 bar 406 / 148 psig
Operating temperature range:	50°F - 131°F
Air volume flow (system / unimpeded):	Ambient air circuit: 188 / 383 cfm Cabinet air circuit: 171 / 324 cfm
Mounting:	Wall mounted / Recessed
Dimension H x W x D:	38.58 x 15.55 x 5.71 in.
Weight:	84 lbs.
Cut out dimensions:	37.83 x 14.80 in.
Voltage / Frequency:	380-415 V 50 Hz 3~ 400-460 V 60 Hz 3~
Current 95F95F:	1.8 A @ 50 Hz 2.1 A @ 60 Hz
Starting current:	8.2 A
Max. current:	2.9 A
Nominal power 95F95F:	660 W @ 50 Hz 760 W @ 60 Hz
Max. power:	840 W
Fuse:	3 x 6 A (T)
Max circuit ampacity:	15 A
Short-circuit current rating:	5 kA
Rated current compressor:	8.2 A
Full load current fans:	2.9 A
Connection:	Connection terminal block


Performance graph:

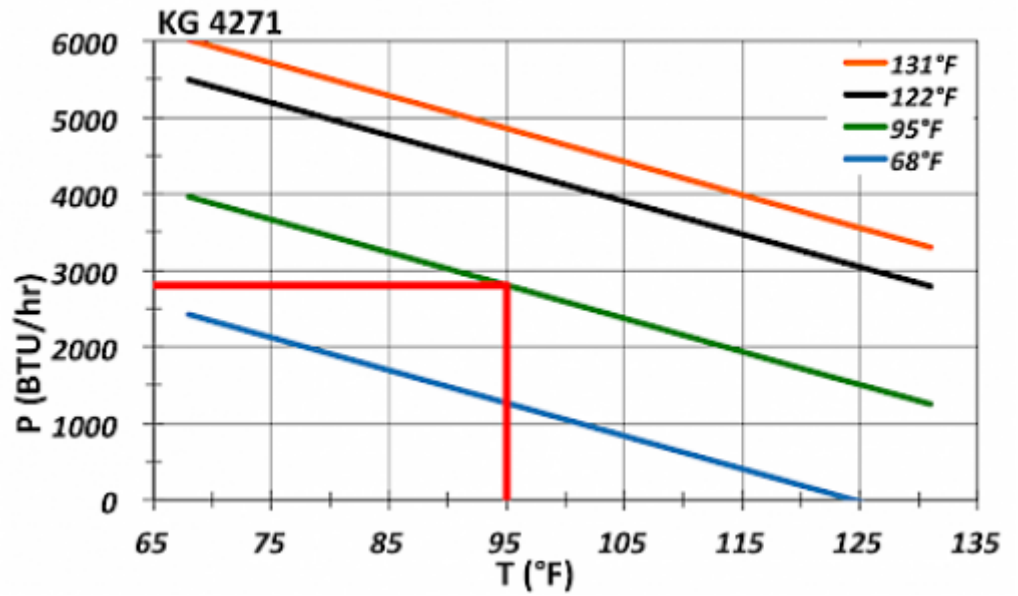

Air flow:

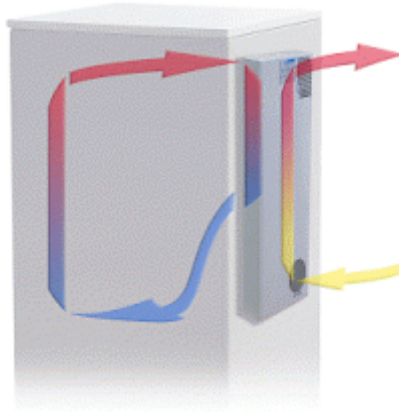

Cut out dimensions:

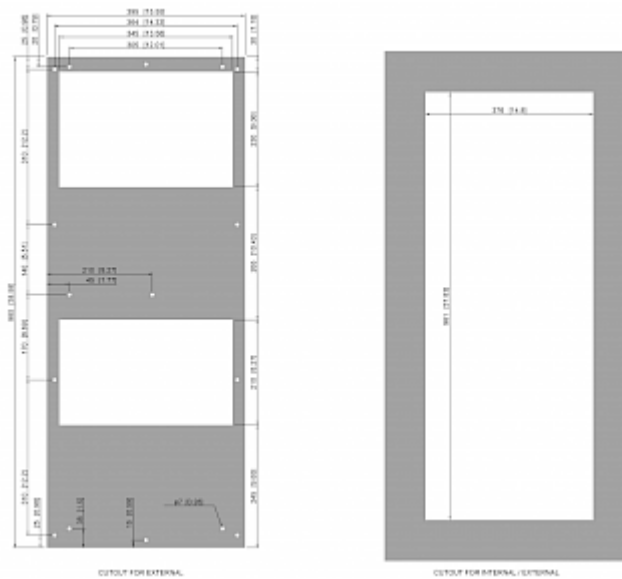

Order Information

Verpackungsmaße	1074.5 x 496 x 204 mm
Bruttogewicht	38.5 kg
Zolltarifnummer	84158200
EAN Nummer	5350604371019