

SOLITHERM PROTEC



Description

Order Number:	87400584
Brand Name:	SOLITHERM PROTEC
Housing Material:	Stainless steel AISI 316 (V4A)
Ingress Protection:	IP 56 / Type 12, 3, 3R, 4, 4X
Included:	Metal mesh filter
Approvals:	CE, cULus
UL File Number:	E498756

Technical Data

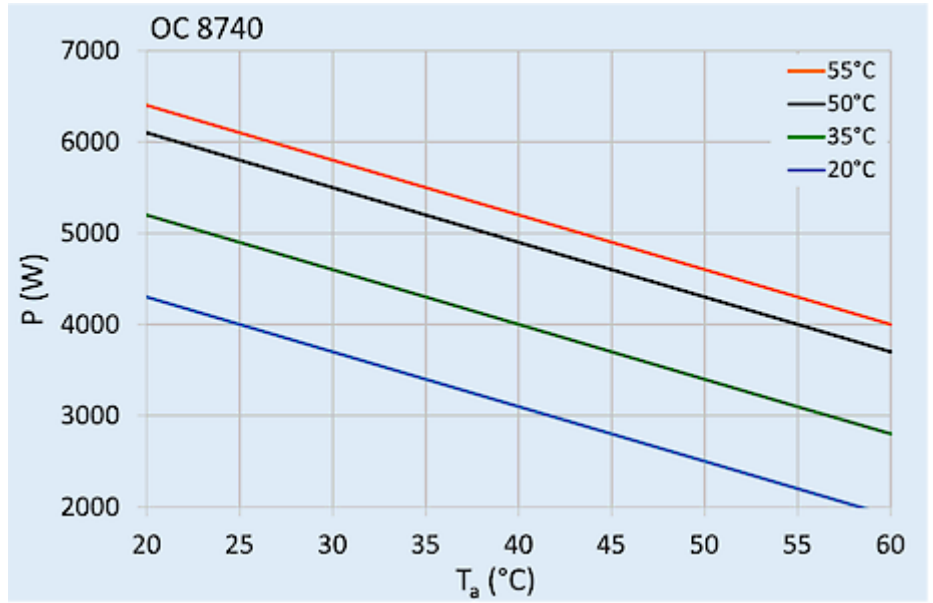
Cooling capacity L35L35 (EN14511-3):	3.9 kW @ 50 Hz 4.3 kW @ 60 Hz
Cooling capacity L35L50 (EN14511-3):	3.3 kW @ 50 Hz 3.4 kW @ 60 Hz
Enclosure heater:	2,000 W
Compressor type:	Reciprocating compressor
Refrigerant / GWP:	R134a / 1430
Refrigerant charge:	606 g / 21.38 oz
High / low Pressure:	32 / 6 bar 460 / 88 psi
Operating Temperature Range:	-40°C - +60°C
UL temperature range:	-40°C - +60°C
Air flow volume (system / unimpeded):	Ambient air circuit: 1085 / 1480 m ³ /h Enclosure air circuit: 870 / 1480 m ³ /h
Mounting:	Wall mounted
Dimensions A x B x C (D+E):	1,040 x 455 x 370 mm
Weight:	65 kg
Voltage / Frequency:	230 V ~ 50/60 Hz
UL Voltage / Frequency:	230 V ~ 60 Hz
Current L35L35:	8.3 A @ 50 Hz 10.6 A @ 60 Hz
Starting current:	50 A
Max. current:	14.8 A
Nominal power L35L35:	1.85 kW @ 50 Hz 2.35 kW @ 60 Hz
Max. power:	3.4 kW
Fuse:	20 A (T)
Max circuit ampacity:	15 A
Short-circuit current rating:	5 kA
Rated current compressor:	7.6 A

Full load current fans:	1.82 A
Connection:	5 pole terminal block for signals 4 pole terminal block for power 3 pole terminal block for RS 485 MODBUS

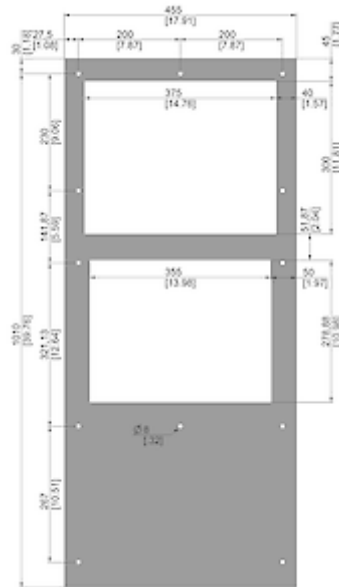
Please click on the graphics to download.

More CAD drawings can be found under [Product Download](#).

> [Overview Product Group SOLITHERM PROTEC - for aggressive conditions](#)

Performance graph:


[click image to enlarge](#)

Cut Out Dimension:


[click image to enlarge](#)

Order Information

Taric code

84158200
