

SLIMLINE HEX Air/water heat exchanger



Description

Order Number:	751221B001
Brand Name:	SLIMLINE HEX
Colour:	RAL 7035
Housing Material:	Mild steel, powder coated
Ingress Protection:	IP 55 / Type 12, 3, 3R, 4, 4X
Included:	Digital controller / solenoid valve
Approvals:	CE, cURus, cULus

Technical Data


Cooling capacity L35W10 (200 l/h):	1300 W
Coolant:	Water, light oils or similar
Operating Temperature Range:	1°C - 60°C
Air flow volume (system / unimpeded):	330 / 500 m³/h
Mounting:	Wall mounted / recessed
Dimensions A x B x C (D+E):	950 x 305 x 192 (37+155) mm
Weight:	17 kg
Voltage / Frequency:	380-415 V 50 Hz 3~ 400-460 V 60 Hz 3~
Starting current:	0.6 / 0.6 A
Max. current:	0.3 / 0.3 A
Max. power:	80 / 100 W
Pressure water circuit:	10 bar
Water connection:	Rp 3/8" - inside thread (with optional connectors for pipe internal diameter of 10 mm)
Fuse:	1 A (T)
Connection:	5 - pole terminal for signals 4 - pole terminal for power

Please click on the graphics to download.

More CAD drawings can be found under [Product Download](#).


> [Overview Product Group SLIMLINE HEX - air/water heat exchangers](#)

Performance graph:

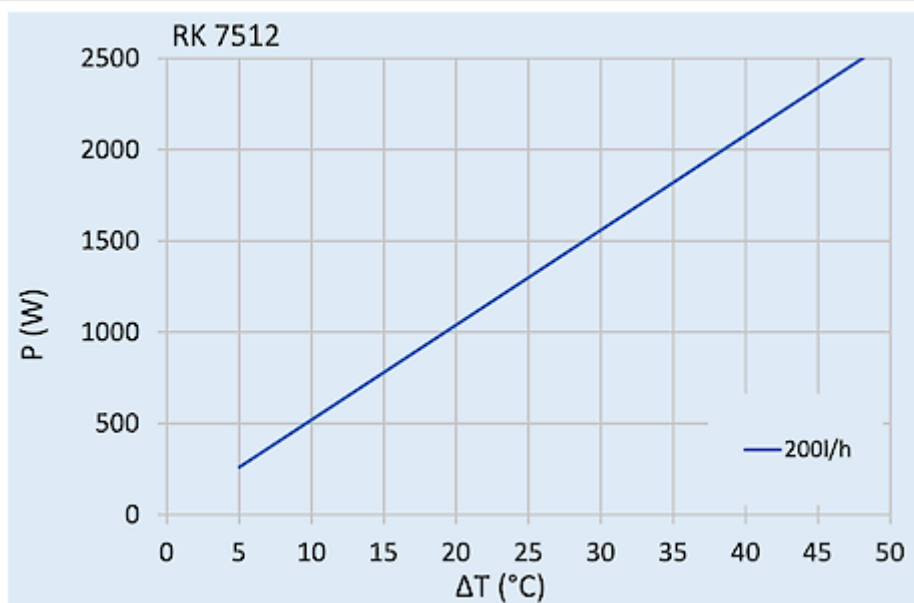

[click image to enlarge](#)

Cut Out Dimension:

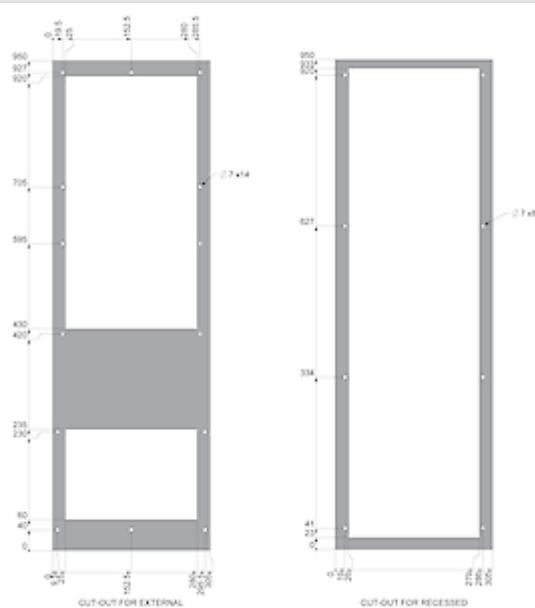

[click image to enlarge](#)

Order Information

Stainless steel AISI 304 (V2A) housing order no.	751221B62
Box dimension	1042 x 405 x 242 mm
Gross weight	21 kg
Taric code	84158300