

Filter Fan



Description

Order Number:	4620A4000
Brand Name:	SOLIFLEX
Colour:	RAL 7035
Housing Material:	ABS Plastic
Ingress Protection:	IP 54, Type 12, 3R
Optional:	Different housing colors available on request
Approvals:	CE, cURus, cULus, CSA

Accessories:



[Hose-proof protection hood FC 4000 300](#)



[Hose-proof protection hood FC 4000 300 FDA](#)



[Adjustable Thermostat NO](#)

Technical Data

Operating Temperature Range:	-10°C - 55°C
Air flow unimpeded:	230 m³/h
Static pressure:	115 Pa @ 50 Hz 155 Pa @ 60 Hz
Dimensions A x B x C (D+E):	250 x 250 x 124.2 mm
Weight:	1.5 kg
Cut out dimensions:	223 x 223 (+1.5) mm
Voltage / Frequency:	230 V ~ 50/60 Hz
Rated current:	0.134 A / 0.16 A
Power consumption:	32 W / 36 W
Degree of separation:	85% - DIN 24185
Wall thickness:	1.5 - 2.5 mm
Filter class:	G3 according to EN 779
Installation:	Elastic clips
Noise level:	50 dB(A) @ 50 Hz 55 dB(A) @ 60 Hz

Please click on the graphics to download.


More CAD drawings can be found under [Product Download](#).

> [Overview Product Group SOLIFLEX - Filter fans & exhaust filters](#)

Air flow:


Q = Air flow [m³/h]

P = Static pressure [Pa]

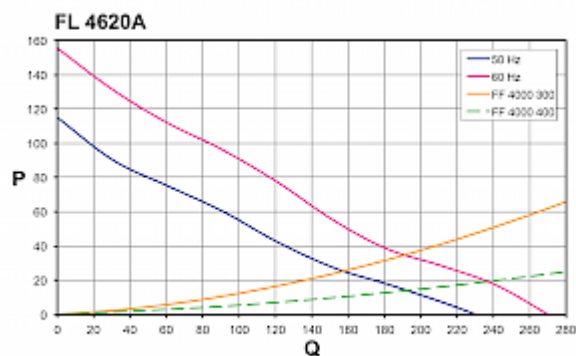

[click image to enlarge](#)

Cut Out Dimension:

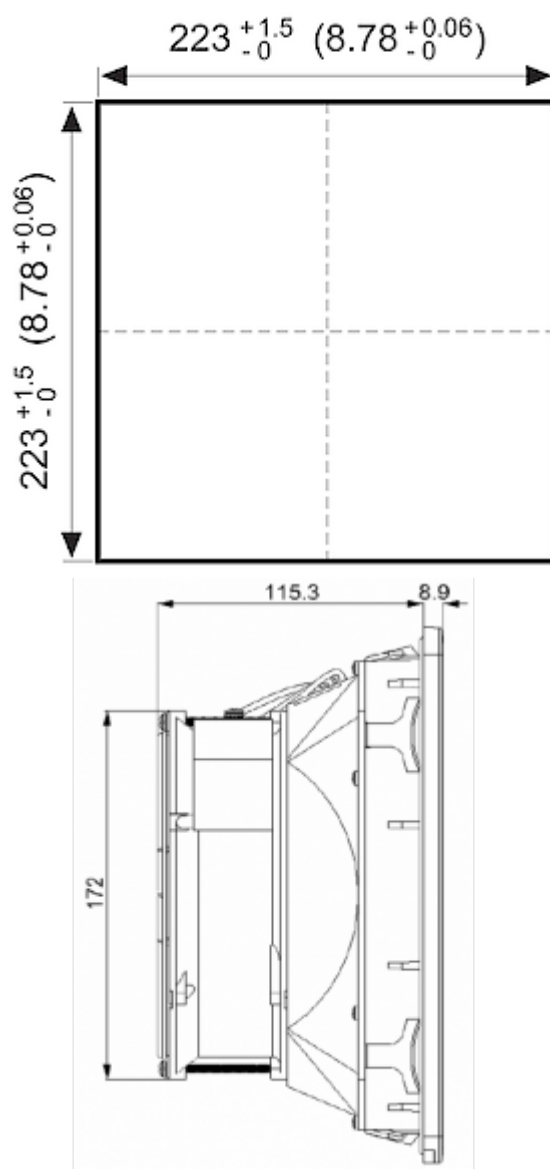

[click image to enlarge](#)

Order Information

In RAL 9005	4620A4003
With TYPE 3R protection part no.	4620A4033
Taric code	84145915
GTIN (EAN)	5350604100527