

Filter Fan



Description

Order Number:	4621A4100
Brand Name:	SOLIFLEX
Colour:	RAL 7035
Housing Material:	ABS Plastic
IP protection class to EN 60 529:	IP 54, Type 12, 3R
Note:	Reverse air flow
Optional:	Different housing colours available on request
Approvals:	CE, cURus, cULus, CSA
Accessories:	



Hose-proof protection hood FC 4000 300



Hose-proof protection hood FC 4000 300 FDA



Adjustable Thermostat NO



Filter media

Technical Data

Air flow unimpeded IP 54:	110 m³/h - 120 m³/h
Operating Temperature Range:	-10°C - 55°C
Static pressure:	66 Pa @ 50 Hz 70 Pa @ 60 Hz
Dimensions A x B x C (D+E):	250 x 250 x 111.8 mm
Weight:	1.2 kg
Cut out dimensions:	223 x 223 (+1.5) mm
Voltage / Frequency:	230 V ~ 50/60 Hz
Rated current:	0.11 A / 0.10 A
Power consumption:	18 W / 17 W
Degree of separation IP 54:	85% - DIN 24185
Wall thickness:	1.5 - 2.5 mm
Filter class (ISO 16890):	G3 according to EN 779
Installation:	Elastic clips
Noise level:	48 dB(A) @ 50 Hz 54 dB(A) @ 60 Hz

Please click on the graphics to download.


More CAD drawings can be found under [Product Download](#).

> [Overview Product Group SOLIVENT PRO - Filter fans & exhaust filters](#)

Air flow:


Q = Air flow [m³/h]

P = Static pressure [Pa]

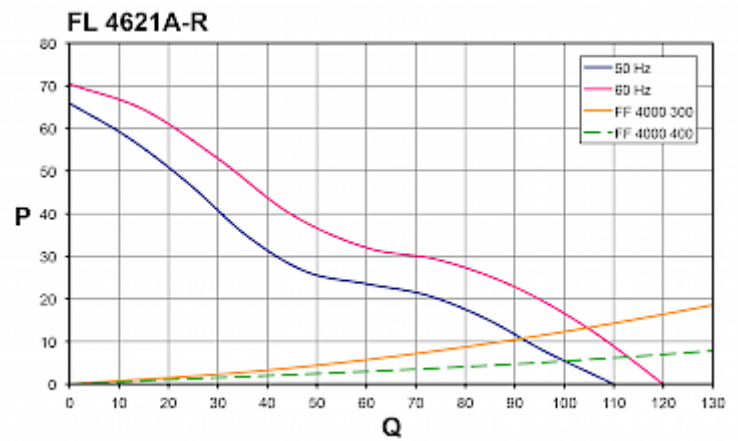

[click image to enlarge](#)

Dimensions:

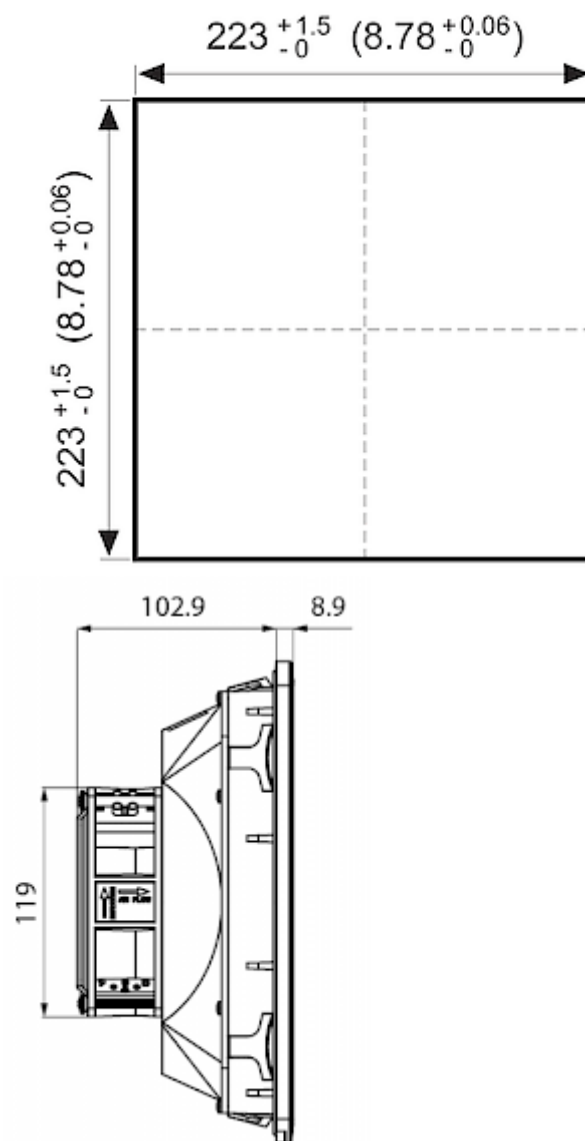

[click image to enlarge](#)

Order Information

In RAL 9005	4621A4103
Taric code	84145915
GTIN (EAN)	5350604100589