

Air / Water Heat Exchanger



Description

Order Number:	2114210
Brand Name:	SLIMLINE HEX
Colour:	RAL 7035
Housing Material:	Mild steel, powder coated
Ingress Protection:	IP 55
Approvals:	CE, cURus

Technical Data

Cooling capacity L35W10 (200 l/h):	1200 W
Cooling capacity L35W10 (500 l/h):	1400 W
Coolant:	Water, light oils or similar
Operating Temperature Range:	1°C - 72°C
Air flow volume (system / unimpeded):	180 / 575 m ³ /h @ 50 Hz 200 / 625 m ³ /h @ 60 Hz
Mounting:	Wall mounted / internal
Dimensions A x B x C (D+E):	891 x 212 x 80 mm
Weight:	7 kg
Voltage / Frequency:	400 V ~ 50/60 Hz
UL Voltage / Frequency:	400 V ~ 50/60 Hz
Starting current:	0.6 A
Max. current:	0.15 A
Max. power:	90 W
Pressure water circuit:	10 bar
Water connection:	Rp 1/4" - inside thread with 2 connectors for pipe internal diameter of 10 mm
Fuse:	3 x 1 A (T)
Connection:	3 m cable ready for connection


Please click on the graphics to download.

More CAD drawings can be found under [Product Download](#).


> [Overview Product Group SLIMLINE HEX - air/water heat exchangers](#)

Performance graph:

ΔT = Temperature difference between enclosure air and coolant
 P = Cooling Capacity

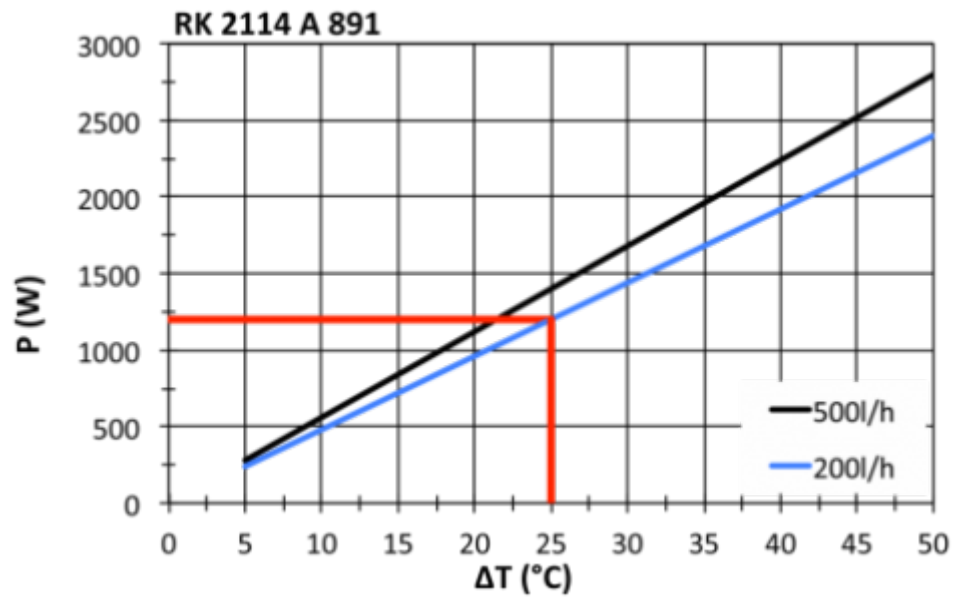


[click image to enlarge](#)

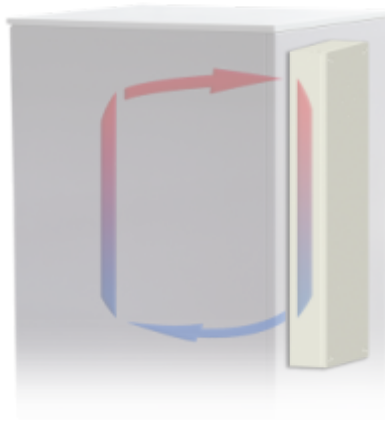Air flow:


[click image to enlarge](#)

Cut Out Dimension:

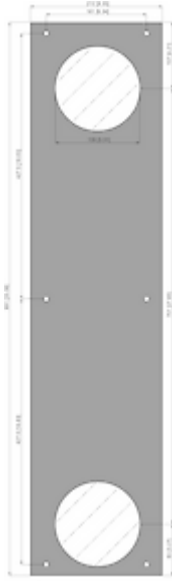

click image to enlarge

Order Information

Stainless steel housing part no.	21142102
With proportional water flow regulator (control range 20°C - 50°C)	2114200
Box dimension	1033.6 x 244 x 127 mm
Gross weight	9 kg
Taric code	84158300
GTIN (EAN)	5350604210493