


## Roof Fan

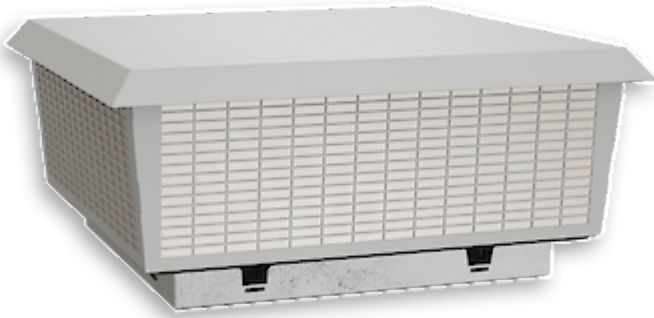

## Description

<b>Order Number:</b>	6996A4000
<b>Brand Name:</b>	SOLIFLEX
<b>Colour:</b>	RAL 7035
<b>Housing Material:</b>	Mild steel, powder coated
<b>Ingress Protection:</b>	IP 21
<b>Included:</b>	Low noise (1500 m <sup>3</sup> /hr) connector High speed (4000 m <sup>3</sup> /hr) connector Connector for Modbus
<b>Approvals:</b>	CE

## Technical Data

<b>Operating Temperature Range:</b>	-20°C - 55°C
<b>Air flow unimpeded:</b>	Low noise: 1,500 m <sup>3</sup> /h High Speed: 4,000 m <sup>3</sup> /hr
<b>Mounting:</b>	top mounted
<b>Dimensions A x B x C (D+E):</b>	310 x 560 x 560 mm
<b>Weight:</b>	16 kg
<b>Cut out dimensions:</b>	410 x 410 mm
<b>Voltage / Frequency:</b>	230 V ~ 50/60 Hz
<b>Rated current:</b>	Low Noise: 0.17 A High Speed: 1.09 A
<b>Power consumption:</b>	Low Noise: 40 W High Speed: 250 W
<b>Filter class:</b>	Optional Aluminium filter
<b>Noise level:</b>	Low Noise: 55 dB(A) High Speed: 70 dB(A)
<b>Connection:</b>	Power - 4 pole connector Fan Status - 2 pole connector Speed Control / Modbus - 5 pole connector


Please click on the graphics to download.

More CAD drawings can be found under [Product Download](#).

> [Overview Product Group SOLIFLEX - Filter fans & exhaust filters](#)


**Air flow:**

Q = Air flow [m<sup>3</sup>/h]  
P = Static pressure [Pa]

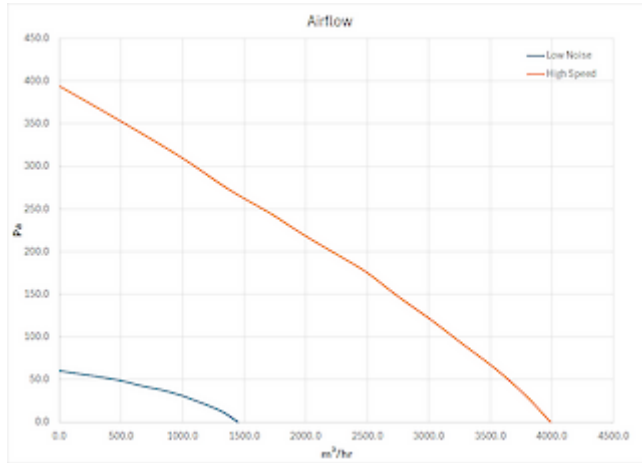

[click image to enlarge](#)

**Cut Out Dimension:**

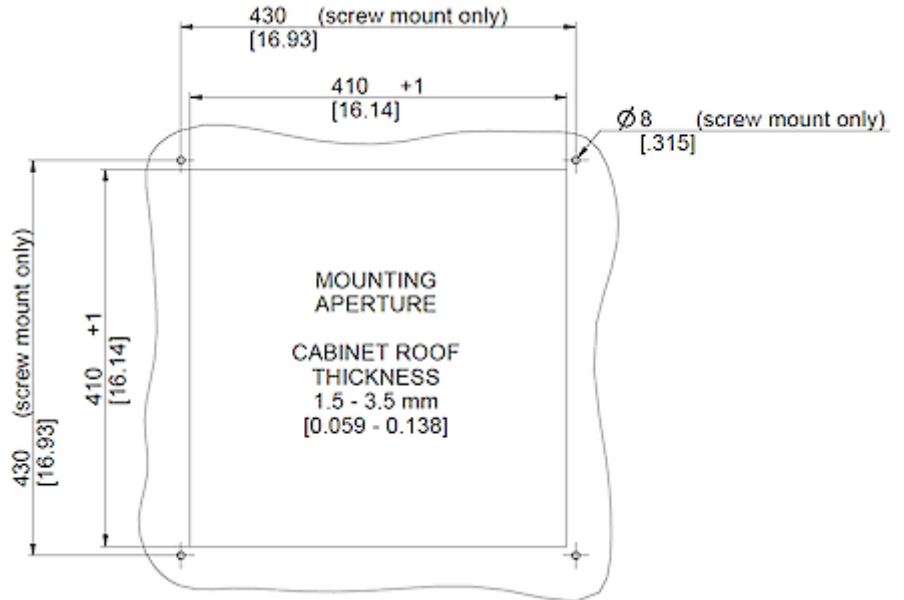

[click image to enlarge](#)

## Order Information

**Taric code**

84145915

---