




Thermoelectric cooling unit



Description

Order Number:	3152303
Brand Name:	SOLITHERM PELTIER
Housing Material:	Stainless steel AISI 304 (V2A)
Ingress Protection:	IP 66 / UL Type 12, 4, 4X
Note:	The torque for the mounting nuts should be 4.5 Nm.
Approvals:	CE, cURus
Accessories:	<div style="display: flex; align-items: flex-start;"> <div style="margin-right: 20px;">  </div> <div> Bimetallic temperature controller </div> </div> <div style="margin-top: 10px;">  </div> <div style="margin-top: 10px;">  </div> <div style="margin-top: 10px;"> Thermostat 301510 </div> <div style="margin-top: 10px;"> Condensate Kit 3152 / 3200 </div>

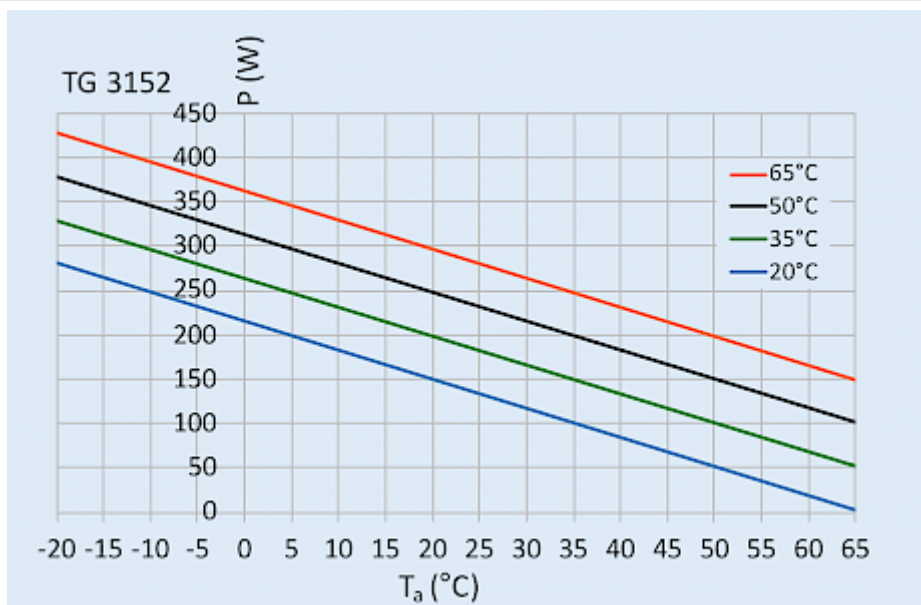
Technical Data

Cooling capacity L35L35 (EN14511-3):	150 W
Operating Temperature Range:	-20°C - 70°C
UL temperature range:	-20°C - 65°C
Air flow volume (system / unimpeded):	Ambient air circuit: 120 / 260 m ³ /h Cabinet air circuit: 60 / 170 m ³ /h
Mounting:	Recessed
Dimensions A x B x C (D+E):	400 x 180 x 170 (79+91) mm
Weight:	9 kg
Cut out dimensions:	370 x 155 mm
Voltage / Frequency:	24 V DC
Current L35L35:	6.3 A
Starting current:	11 A
Max. current:	7.9 A
Nominal power L35L35:	170 W
Max. power:	188 W
Fuse:	10 A (T)
Connection:	Connection terminal block

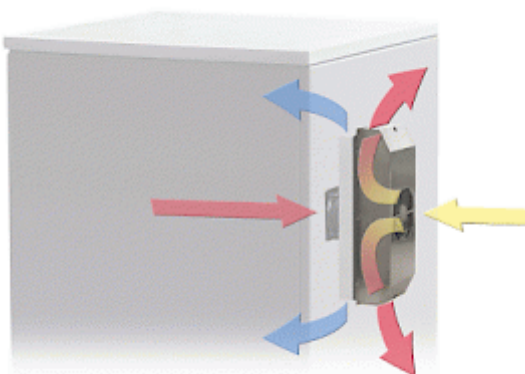
Please click on the graphics to download.

More CAD drawings can be found under [Product Download](#).

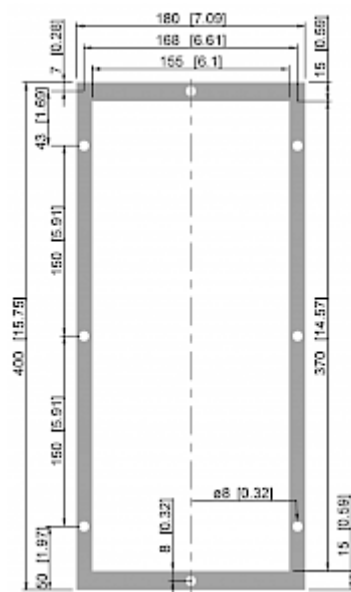
> [Overview Product Group SOLITHERM PELTIER - cooling without refrigerant](#)

Performance graph:


click image to enlarge

Air flow:


click image to enlarge

Cut Out Dimension:


click image to enlarge

Order Information

Stainless steel AISI 316 (V4A) housing part no.	31523034
Box dimension	486.6 x 205 x 183.5 mm
Gross weight	11 kg
Taric code	84158300