




Thermoelectric cooling unit



Description

Order Number:	3200303
Brand Name:	SOLITHERM PELTIER
Housing Material:	Stainless steel AISI 304 (V2A)
Ingress Protection:	IP 66 / UL Type 12, 4, 4X
Note:	The torque for the mounting nuts should be 4.5 Nm.
Approvals:	CE, cURus
Accessories:	<div style="display: flex; align-items: center;">  Bimetallic temperature controller </div> <div style="display: flex; align-items: center; margin-top: 10px;">  Thermostat 301510 </div> <div style="display: flex; align-items: center; margin-top: 10px;">  Condensate Kit 3152 / 3200 </div>

Technical Data


Cooling capacity L35L35 (EN14511-3):	200 W
Operating Temperature Range:	-20°C - 70°C
UL temperature range:	-20°C - 65°C
Air flow volume (system / unimpeded):	Ambient air circuit: 120 / 260 m ³ /h Cabinet air circuit: 120 / 260 m ³ /h
Mounting:	Recessed
Dimensions A x B x C (D+E):	400 x 180 x 170 (79+91) mm
Weight:	10 kg
Cut out dimensions:	370 x 155 mm
Voltage / Frequency:	24 V DC
Current L35L35:	11.3 A
Starting current:	16.9 A
Max. current:	12.9 A
Nominal power L35L35:	270 W
Max. power:	311 W
Fuse:	18 A (T)
Connection:	Connection terminal block

Please click on the graphics to download.

More CAD drawings can be found under [Product Download](#).


> [Overview Product Group SOLITHERM PELTIER - cooling without refrigerant](#)

Performance graph:

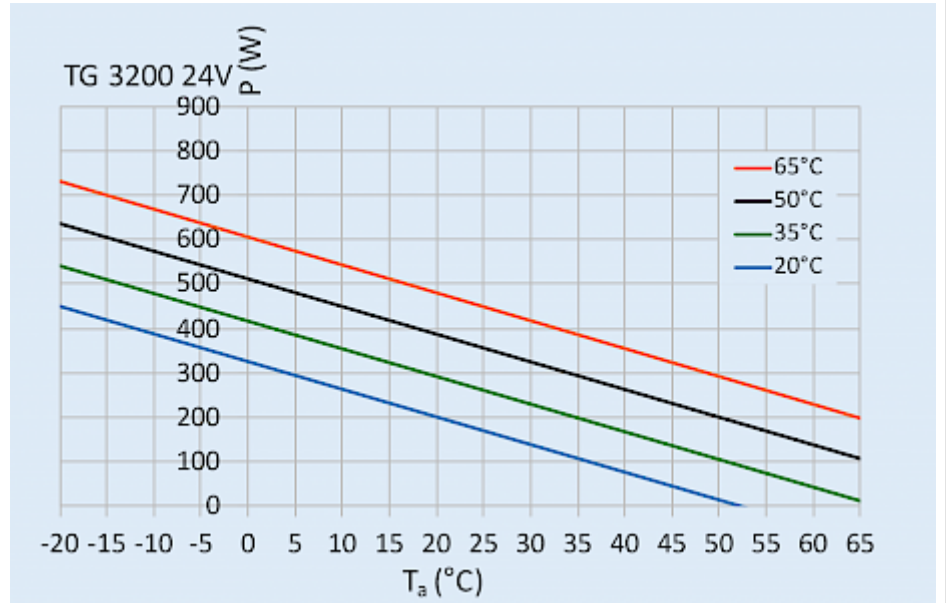


click image to enlarge

Air flow:

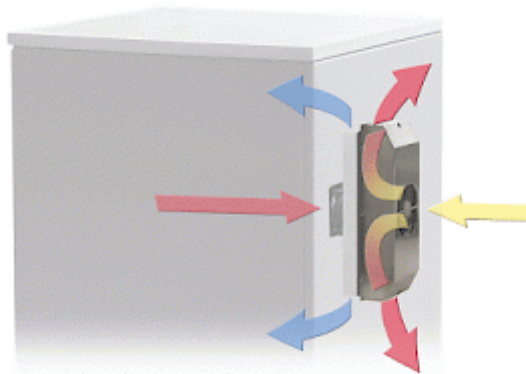

click image to enlarge

Cut Out Dimension:

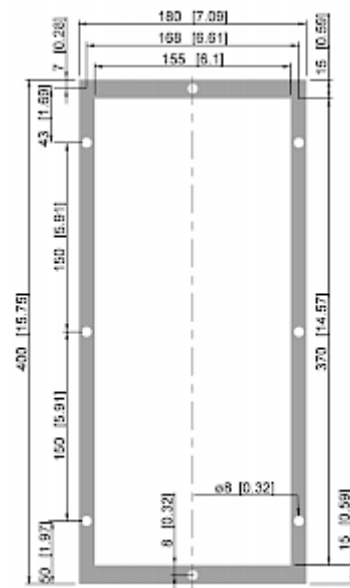

click image to enlarge

Order Information

Stainless steel AISI 316 (V4A) housing part no.	32003034
Box dimension	486.6 x 205 x 183.5 mm
Gross weight	12 kg
Taric code	84158300