


Sensor operated LED lamp. Only for installation inside industrial control cabinets.



Description		
Order Number:	490540612	
Colour:	RAL 9003	
Housing Material:	Mild steel, powder coated	
IP protection class to EN 60 529:	IP 20	
Included:	Motion sensor	
SK notes:	Suitable for damp locations	
Approvals:	CE, cURus	
UL File Number:	E358386	
Accessories:	D4	Power cable AC black, 0.7 m
	B4	Power cable AC orange, 0.7 m
	Di	Power cable AC black, 3 m
	DI	Power cable AC orange, 3 m

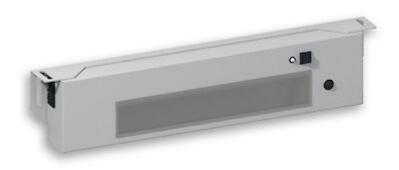

Technical Data

Operating Temperature Range:	-30°C - 50°C	
Mounting:	M5 screws (x2)	
Dimensions A x B x C (D+E):	420 x 90 x 45 mm	
Weight:	2 kg	
Voltage / Frequency:	115 - 230 V ~ 50/60 Hz	
Rated current:	0.2 A	
Power consumption:	16 W	
Lamp:	EB-7801	
Luminosity:	1500 lm / 5100 K	
Lifetime:	60,000 hrs. @ 20°C	
Connection:	Recommended external backup fuse: 0.5 A (T)	


Please click on the graphics to download.

More CAD drawings can be found under Product Download.

> Overview Product Group Energy-saving LED enclosure Lamps



Performance graph:

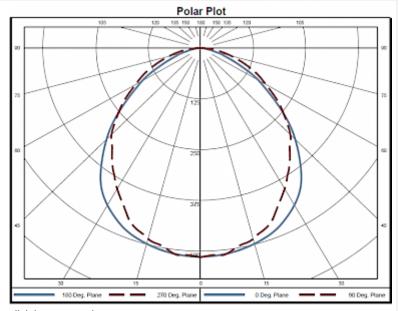

click image to enlarge



Order Information

Taric code 94054990