

Filter Fan



Description

Order Number: 4830A9000

Brand Name: SOLIFLEX

Colour: RAL 7035

Housing Material: ABS Plastic

Ingress Protection: IP 54, Type 12, 3R

Optional: Different housing colors available on request

Approvals: CE, cURus, cULus

Accessories:



[Hose-proof protection hood FC 4000 400](#)



[Hose-proof protection hood FC 4000 400 FDA](#)



[Adjustable Thermostat NO](#)

Technical Data

Operating Temperature Range:	-10°C - +70°C
Air flow unimpeded:	540 m ³ /h
Static pressure:	180 Pa
Dimensions A x B x C (D+E):	325 x 325 x 160.2 mm
Weight:	3.1 kg
Cut out dimensions:	291 +1.5 x 291 +1.5 mm
Voltage / Frequency:	380-415 V 50 Hz 3~ 400-460 V 60 Hz 3~
Rated current:	0.25 A
Power consumption:	169 W
Degree of separation:	85% - DIN 24185
Wall thickness:	1.5 - 2.5 mm
Filter class:	G3 according to EN 779
Installation:	Elastic clips
Noise level:	69.8 dB(A) @ 50 Hz 72.7 dB(A) @ 60 Hz

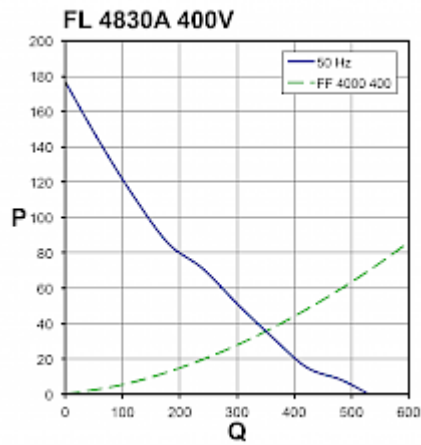
Please click on the graphics to download.

More CAD drawings can be found under [Product Download](#).

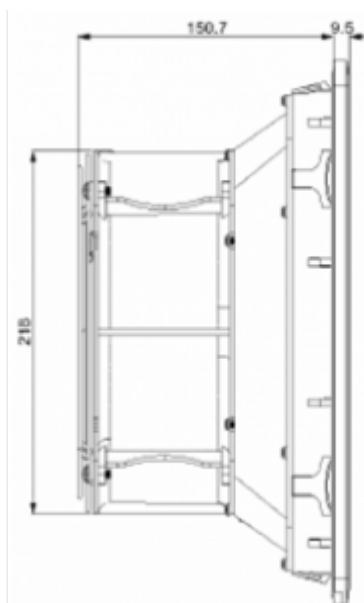
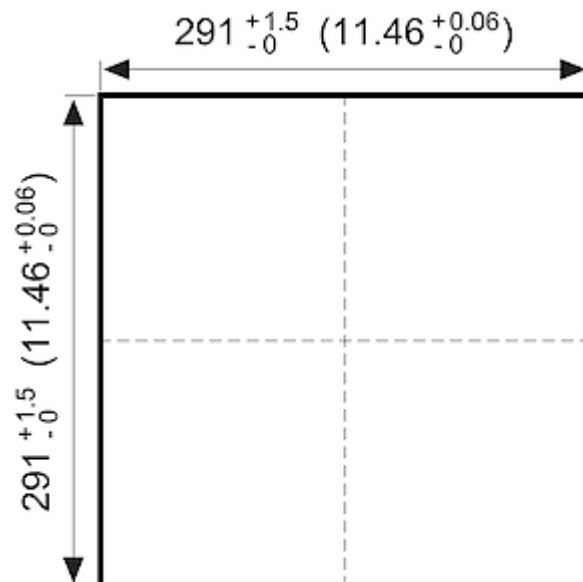
> [Overview Product Group SOLIFLEX - Filter fans & exhaust filters](#)

Air flow:

Q = Air flow [m³/h]
 P = Static pressure [Pa]



[click image to enlarge](#)

Cut Out Dimension:


[click image to enlarge](#)

Order Information

In RAL 9005	4830A9003
Taric code	84145915
GTIN (EAN)	5350604100640