

Sensor operated LED lamp. Only for installation inside industrial control cabinets.



Descri	ation
Descri	JUIUII

Order Number:

Colour:	RAL 9003
Housing Material:	Mild steel, powder coated
IP protection class to EN 60 529:	IP 20
Included:	Motion sensor Daisy Chain max. 10
SK notes:	Suitable for damp locations
Approvals:	CE, cURus

490561612

E358386

Accessories:

UL File Number:

Power cable DC black, 0.7 m

Power cable DC black, 3 m

Daisy Chain cable DC black, 0.7 m

Daisy Chain cable AC black, 1.2 m



Technical Data

Operating Temperature Range:	-30°C - 50°C
Mounting:	M5 screws (x2)
Dimensions A x B x C (D+E):	420 x 90 x 45 mm
Weight:	2 kg
Voltage / Frequency:	24 V DC
Voltage tolerance:	Only use SELV-DC power sources
Rated current:	5 A
Power consumption:	12 W
Lamp:	EB-7801
Luminosity:	1500 lm / 5100 K
Lifetime:	60,000 hrs. @ 20°C
Connection:	Recommended external backup fuse: 7 A (T)


Please click on the graphics to download.

More CAD drawings can be found under Product Download.

> Overview Product Group Energy-saving LED enclosure Lamps





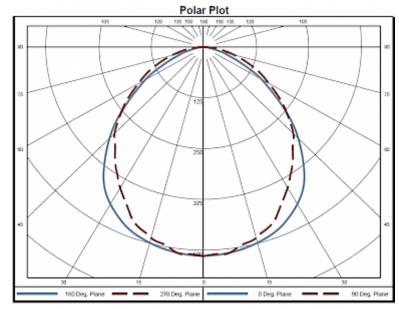

click image to enlarge



Order Information

Taric code 94054990