


## Filterless enclosure cooling unit



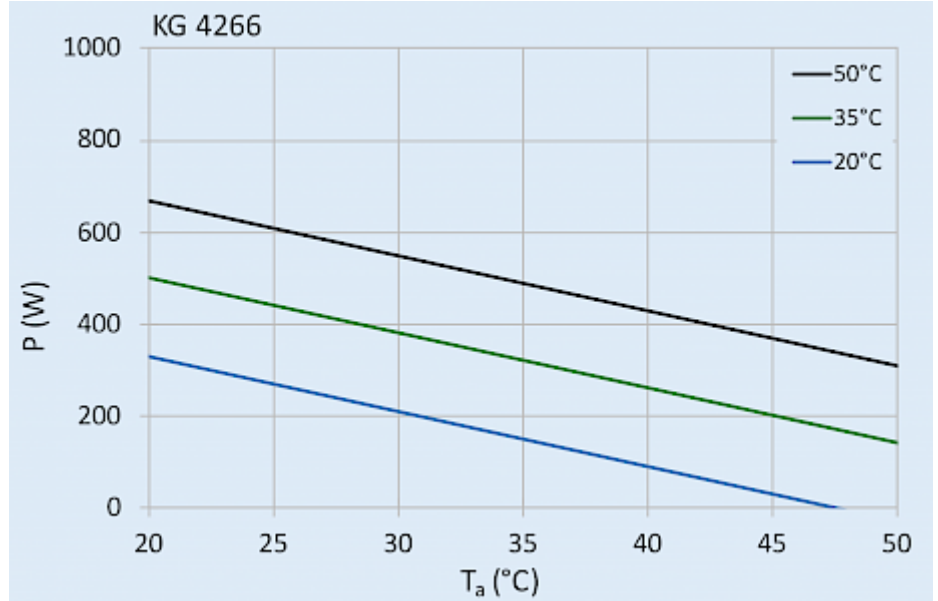
## Description

<b>Order Number:</b>	4266002
<b>Brand Name:</b>	SLIMLINE
<b>Housing Material:</b>	Stainless steel AISI 304 (V2A)
<b>Ingress Protection:</b>	IP 54 / TYPE 12
<b>Approvals:</b>	CE, cURus, cULus
<b>Accessories:</b>	 <a href="#">NEMA 4X Cover 4266</a>

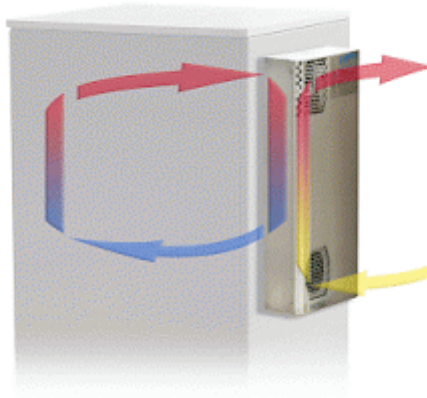
## Technical Data

<b>Cooling capacity L35L35 (EN14511-3):</b>	320 W @ 50 Hz 330 W @ 60 Hz
<b>Cooling capacity L35L50 (EN14511-3):</b>	140 W @ 50 Hz 150 W @ 60 Hz
<b>Compressor type:</b>	Rotary piston compressor
<b>Refrigerant / GWP:</b>	R134a / 1430
<b>Refrigerant charge:</b>	105 g / 3.7 oz
<b>High / low Pressure:</b>	20 / 13 bar 290 / 188 psig
<b>Operating Temperature Range:</b>	10°C - 50°C
<b>Air flow volume (system / unimpeded):</b>	Ambient air circuit: 170 / 250 m <sup>3</sup> /h Cabinet air circuit: 125 / 250 m <sup>3</sup> /h
<b>Mounting:</b>	Wall mounted / Recessed
<b>Dimensions A x B x C (D+E):</b>	520 x 270 x 110 (25+85) mm
<b>Weight:</b>	13 kg
<b>Cut out dimensions:</b>	501 x 251 mm
<b>Voltage / Frequency:</b>	230 V ~ 50/60 Hz
<b>UL Voltage / Frequency:</b>	230 V ~ 60 Hz
<b>Current L35L35:</b>	1.5 A @ 50 Hz 1.6 A @ 60 Hz
<b>Starting current:</b>	3.2 A
<b>Max. current:</b>	2.3 A
<b>Nominal power L35L35:</b>	315 W @ 50 Hz 335 W @ 60 Hz
<b>Max. power:</b>	375 W
<b>Fuse:</b>	6 A (T)
<b>Short-circuit current rating:</b>	5 kA
<b>Rated current compressor:</b>	3.1 A
<b>Full load current fans:</b>	2.3 A
<b>Connection:</b>	Connection terminal block

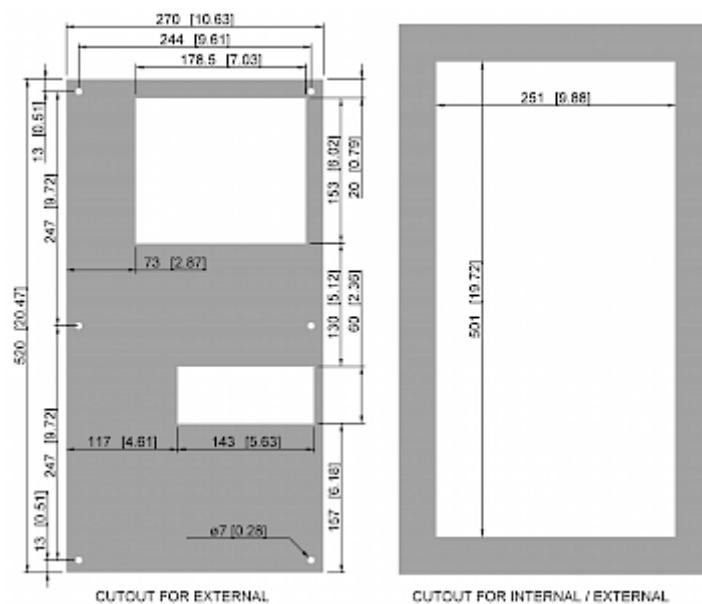
Please click on the graphics to download.  
More CAD drawings can be found under [Product Download](#).  
> [Overview Product Group SLIMLINE - filterless cooling units](#)

**Performance graph:**


click image to enlarge

**Air flow:**


click image to enlarge

**Cut Out Dimension:**


click image to enlarge

## Order Information

<b>Box dimensions</b>	580 x 290 x 150 mm
<b>Gross weight</b>	14.5 kg
<b>Taric code</b>	84158200
<b>GTIN (EAN)</b>	5350604370012