

Thermoelectric cooling unit



Description

Order Number:	6405325
Brand Name:	SOLITHERM PELTIER
Housing Material:	Stainless steel AISI 304 (V2A)
Ingress Protection:	IP 66 / UL Type 12, 4, 4X
Included:	Condensate drain socket
Note:	The torque for the mounting nuts should be 4.5 Nm.
Approvals:	CE, cURus

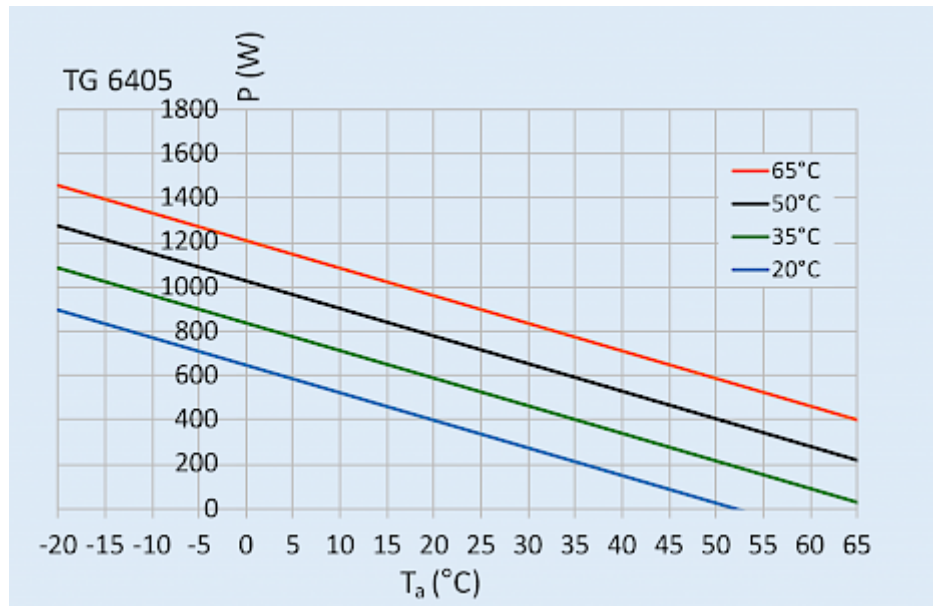
Technical Data

Cooling capacity L35L35 (EN14511-3):	400 W
Operating Temperature Range:	-20°C - 70°C
UL temperature range:	-20°C - 65°C
Air flow volume (system / unimpeded):	Ambient air circuit: 240 / 325 m ³ /h Cabinet air circuit: 240 / 325 m ³ /h
Mounting:	Wall mounted (with frame)
Dimensions A x B x C (D+E):	600 x 433 x 203 mm
Weight:	37 kg
Cut out dimensions:	382 x 550 mm
Voltage / Frequency:	230 V ~ 50/60 Hz
Current L35L35:	2.1 A
Starting current:	3.4 A
Max. current:	2.3 A
Nominal power L35L35:	490 W
Max. power:	537 W
Fuse:	4 A (T)
Connection:	4 pole power connector 5 pole connector for signals

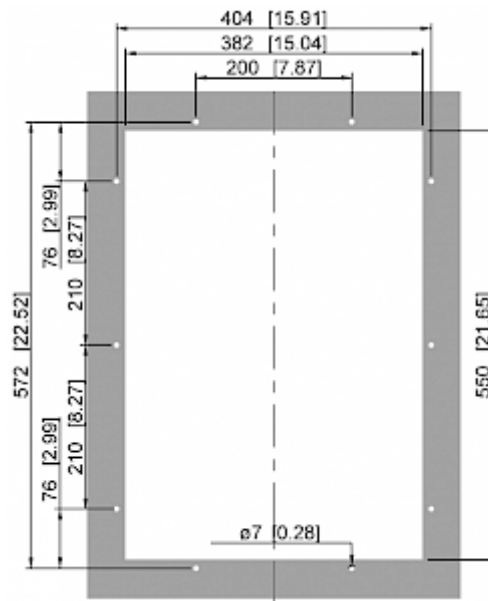
Please click on the graphics to download.

More CAD drawings can be found under [Product Download](#).

> [Overview Product Group SOLITHERM PELTIER - cooling without refrigerant](#)

Performance graph:


[click image to enlarge](#)

Cut Out Dimension:


[click image to enlarge](#)

Order Information

Stainless steel AISI 316 (V4A) housing part no.	64053254
Box dimension	686.6 x 454 x 232 mm
Gross weight	41 kg
Taric code	84158300