

CU Connect. Roof 1.5kW IP54



Description

Order Number:	952020001
Brand Name:	SLIMLINE PRO TOP
Colour:	RAL 7035
Housing Material:	Mild steel, powder coated
Ingress Protection:	IP 54
Approvals:	CE

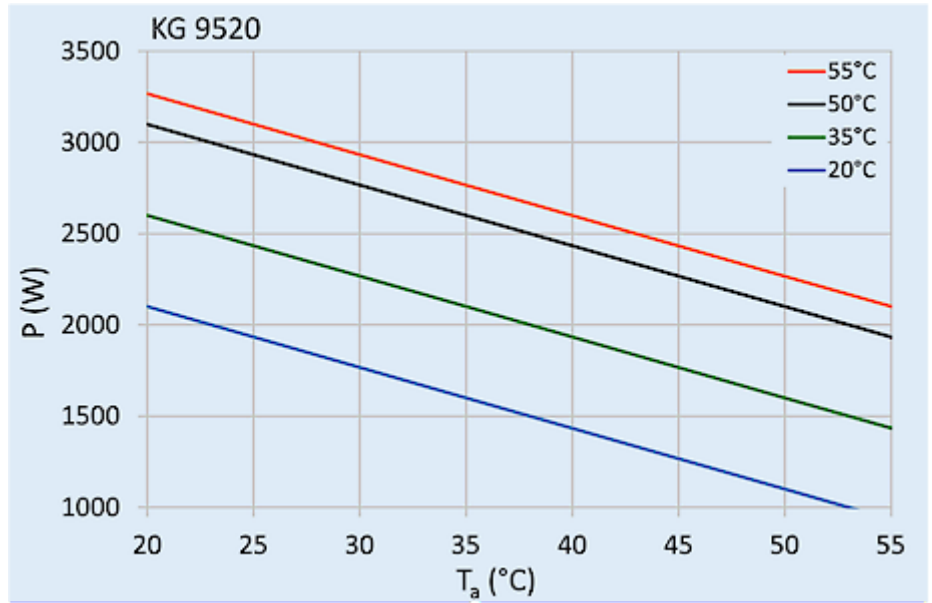
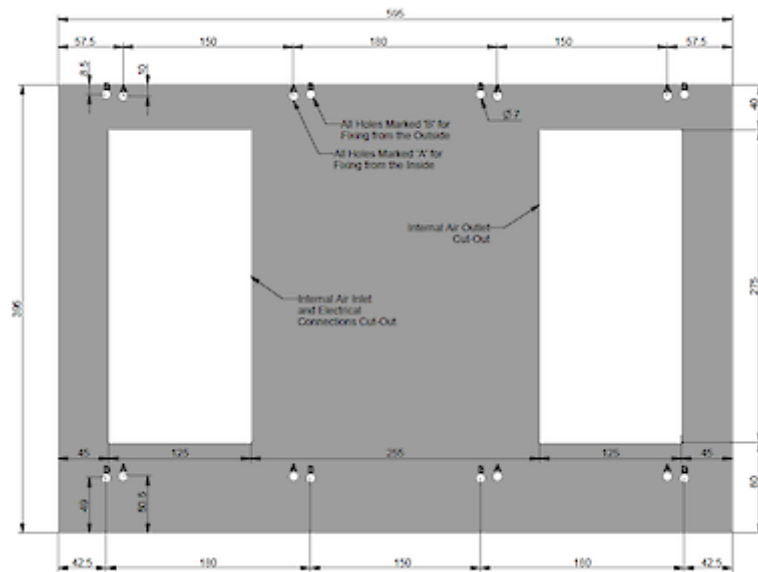
Technical Data

Cooling capacity L35L35 (EN14511-3):	2100 W
Cooling capacity L35L50 (EN14511-3):	1600 W
Compressor type:	Rotary piston
Refrigerant / GWP:	R134a / 1430
Refrigerant charge:	465 g. / 16.4 oz.
High / low Pressure:	28 / 6 bar 406 / 88 psi
Operating Temperature Range:	5°C - 55°C
Air flow volume (system / unimpeded):	Ambient air circuit: 1200 m ³ /h Enclosure air circuit: 630 m ³ /h
Mounting:	Roof mounted
Dimensions A x B x C (D+E):	435 x 595 x 475 mm
Weight:	40.1 kg
Voltage / Frequency:	400/460 V - 50/60 Hz 2~
Current L35L35:	1.7 / 1.8 A
Starting current:	13 A
Max. current:	2.4 A
Nominal power L35L35:	0.88 / 1.1 kW
Max. power:	1.6 kW
Fuse:	15 A (T)
Short-circuit current rating:	5 kA
Connection:	4 pole connector for power 5 pole connector for signals 3 pole connector for RS 485 MODBUS

Please click on the graphics to download.

More CAD drawings can be found under [Product Download](#).

> [Overview Product Group SLIMLINE PRO TOP - roof mounted cooling units](#)

Performance graph:

[click image to enlarge](#)
Cut Out Dimension:

[click image to enlarge](#)

Order Information

Stainless steel housing part no.	95202002
Taric Code	84158200