

CU Connect. Roof 1.5kW IP54



Description

Order Number:	954020001
Brand Name:	SLIMLINE PRO TOP
Colour:	RAL 7035
Housing Material:	Mild steel, powder coated
Ingress Protection:	IP 54
Approvals:	CE

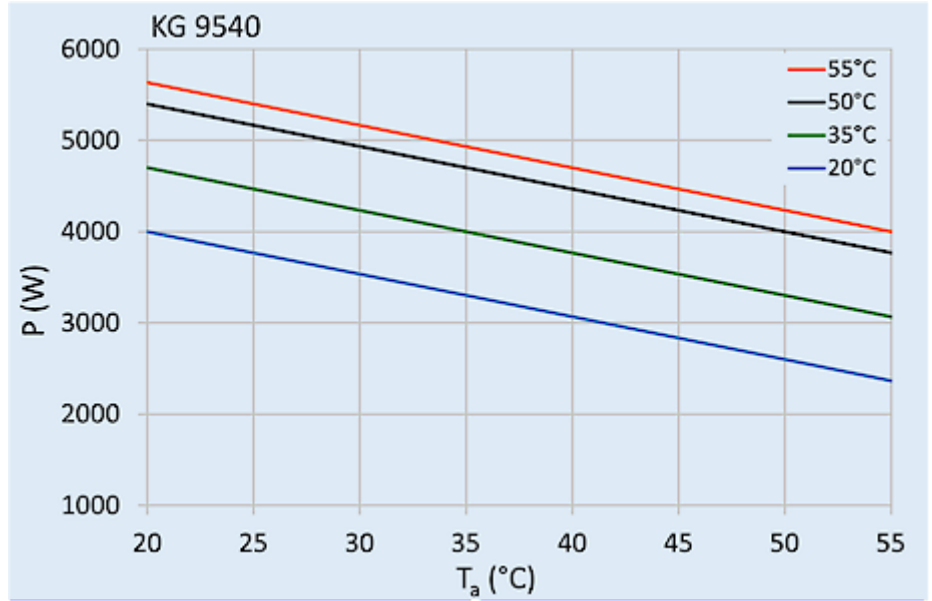
Technical Data

Cooling capacity L35L35 (EN14511-3):	4000 W
Cooling capacity L35L50 (EN14511-3):	3300 W
Compressor type:	Rotary piston
Refrigerant / GWP:	R134a / 1430
Refrigerant charge:	545 g / 19.2 oz.
High / low Pressure:	28 / 6 bar 406 / 88 psi
Operating Temperature Range:	5°C - 55°C
Air flow volume (system / unimpeded):	Ambient air circuit: 1400 m ³ /h Enclosure air circuit: 1233 m ³ /h
Mounting:	Roof mounted
Dimensions A x B x C (D+E):	456 x 795 x 575 mm
Weight:	57.2 kg
Voltage / Frequency:	400/460 V - 50/60 Hz 3~
Current L35L35:	3.2 / 3.3 A
Starting current:	28 A
Max. current:	4.1 A
Nominal power L35L35:	1.48 / 1.90 kW
Max. power:	2.6 kW
Fuse:	15 A (T)
Short-circuit current rating:	5 kA
Connection:	4 pole connector for power 5 pole connector for signals 3 pole connector for RS 485 MODBUS

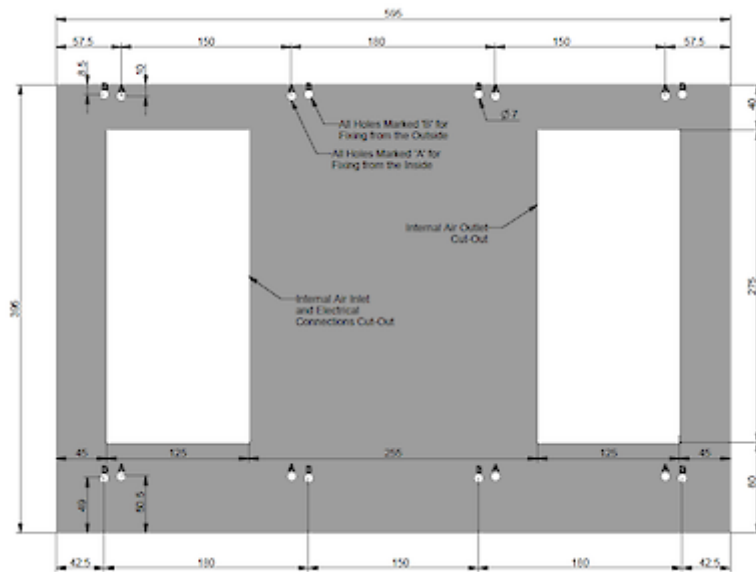
Please click on the graphics to download.

More CAD drawings can be found under [Product Download](#).

> [Overview Product Group SLIMLINE PRO TOP - roof mounted cooling units](#)

Performance graph:


[click image to enlarge](#)

Cut Out Dimension:


[click image to enlarge](#)

Order Information

Stainless steel housing part no.	95402002
Taric Code	84158200