

Outdoor cooling unit



Description

| | |
|----------------------------|--|
| Order Number: | 572001201 |
| Brand Name: | Compact Outdoor |
| Colour: | RAL 7035 |
| Housing Material: | Mild steel, powder coated |
| Ingress Protection: | IP 56 / Type 12, 3, 3R, 4 |
| Included: | With enclosure heater and aluminium filter |
| Approvals: | CE, cURus, cULus |
| UL File Number: | cURus (SA32278), cULus (E498756) |

Technical Data


| | |
|--|---|
| Cooling capacity L35L35 (EN14511-3): | 2000 W @ 50 Hz 2000 W @ 60 Hz |
| Cooling capacity L35L50 (EN14511-3): | 1600 W @ 50 Hz 1600 W @ 60 Hz |
| Enclosure heater: | 1000 W |
| Compressor type: | Rotary piston compressor |
| Refrigerant / GWP: | R134a / 1430 |
| Refrigerant charge: | 460 g / 16.2 oz |
| High / low Pressure: | 29.3 / 6.1 bar 425 / 88 psig |
| Operating Temperature Range: | -40°C - 55°C |
| Air flow volume (system / unimpeded): | Ambient air circuit: 655 / 1200 m ³ /h Cabinet air circuit: 400 / 850 m ³ /h |
| Mounting: | Wall mounted |
| Dimensions A x B x C (D+E): | 1,150 x 395 x 270 mm |
| Weight: | 49 kg |
| Voltage / Frequency: | 230 V ~ 50/60 Hz |
| UL Voltage / Frequency: | 230 V ~ 60 Hz |
| Current L35L35: | 5.5 A @ 50 Hz 6.5 A @ 60 Hz |
| Starting current: | 16 A |
| Max. current: | 7.9 A |
| Nominal power L35L35: | 1,17 kW @ 50 Hz 1,41 kW @ 60 Hz |
| Max. power: | 1,65 kW @ 50 Hz 2,10 kW @ 60 Hz |
| Fuse: | 13 A (T) |
| Short-circuit current rating: | 5 kA |
| Connection: | Connection terminal block |

Please click on the graphics to download.

More CAD drawings can be found under [Product Download](#).


> [Overview Product Group COMPACT OUTDOOR - cooling units NEMA / Type 4X](#)

Performance graph:

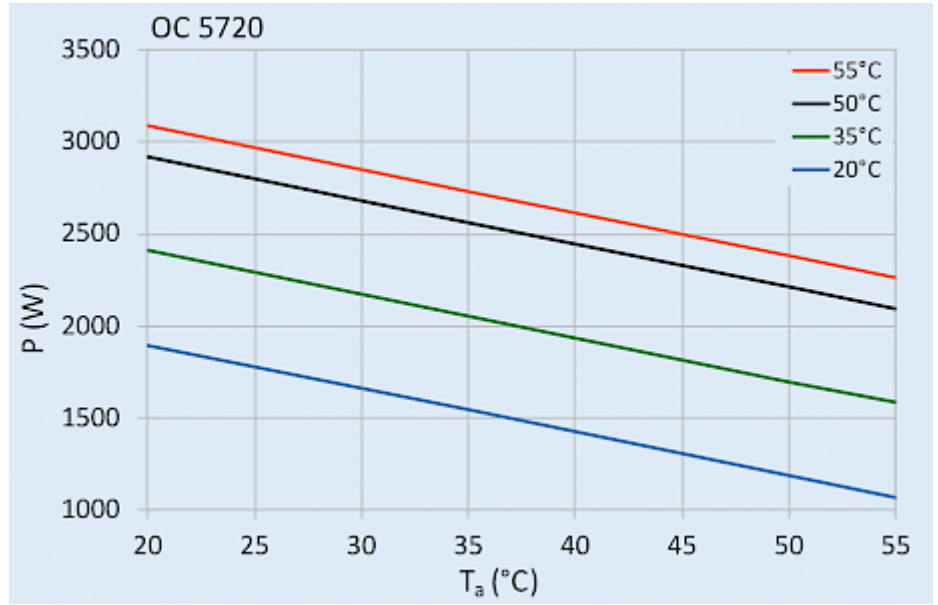

[click image to enlarge](#)

Cut Out Dimension:

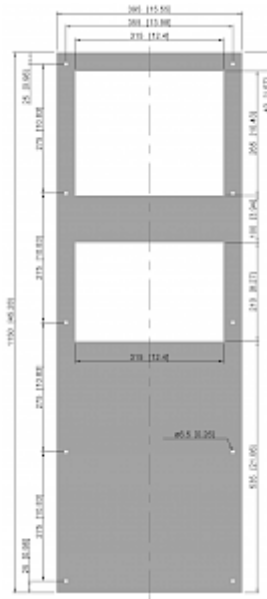

[click image to enlarge](#)

Order Information

Box dimensions 1,190 x 443 x 310 mm

Gross weight 52 kg

Taric code 84158200