

Air / air heat exchanger



Description

Order Number:	580321001
Brand Name:	SLIMLINE HEX
Colour:	RAL 7035
Housing Material:	Mild steel, powder coated
Ingress Protection:	IP 54 / NEMA 12
Approvals:	CE, cURus
UL File Number:	SA9672

Technical Data

Heat exchanger performance:	32 W/K
Operating Temperature Range:	-5°C - 55°C
Air flow volume (system / unimpeded):	Ambient air circuit: 250 / 550 m ³ /h Cabinet air circuit: 255 / 550 m ³ /h
Mounting:	Wall mounted
Dimensions A x B x C (D+E):	750 x 254 x 151 mm
Weight:	12 kg
Voltage / Frequency:	120 V ~ 60 Hz
UL Voltage / Frequency:	120 V ~ 60 Hz
Starting current:	1.6 A
Max. current:	1.4 A
Max. power:	150 W
Fuse:	3 A (T)
Connection:	8 pin connector


Please click on the graphics to download.

More CAD drawings can be found under [Product Download](#).

> [Overview Product Group SOLITHERM HEX AIR - air / air heat exchangers](#)


Performance graph:

T = Temperature difference
between ambient and
internal temperature
P = Heat exchanger
performance

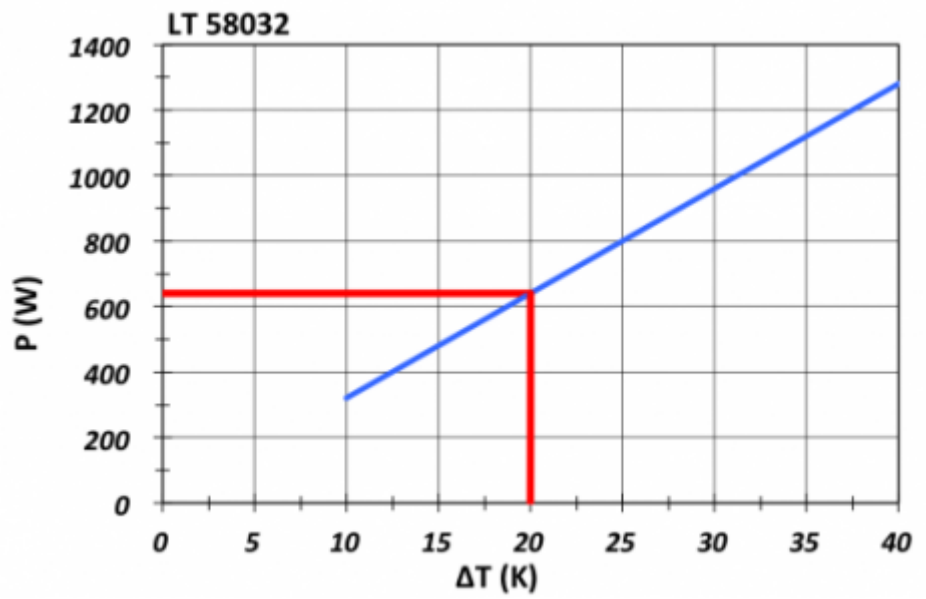


[click image to enlarge](#)

Air flow:

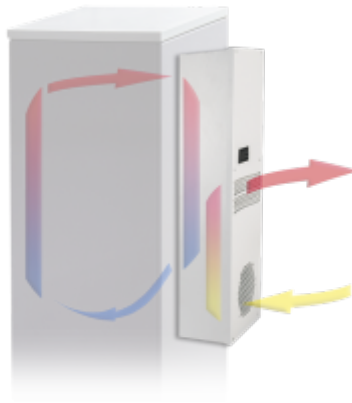

[click image to enlarge](#)

Cut Out Dimension:

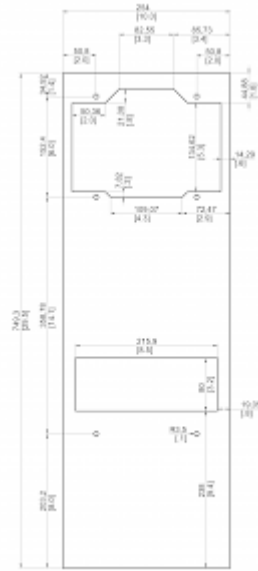

click image to enlarge

Order Information

Stainless steel housing part no.	58032102
Box dimension	852 x 279 x 202.5 mm
Gross weight	15 kg
Taric code	84158300
GTIN (EAN)	5350604200074