




Control Cabinet Air Conditioner



Description

Order Number:	43041001
Brand Name:	COMPACT INDOOR
Colour:	RAL 7035
Housing Material:	Mild steel, powder coated
IP protection class to EN 60 529:	IP 54 / TYPE 12
Approvals:	CE, cURus, cULus
Accessories:	<div style="display: flex; align-items: center; margin-bottom: 10px;">  <div style="margin-left: 10px;">Stainless Steel Filter Holder 4304</div> </div> <div style="display: flex; align-items: center; margin-bottom: 10px;">  <div style="margin-left: 10px;">Fibre Filter Media 4304</div> </div> <div style="display: flex; align-items: center;">  <div style="margin-left: 10px;">Washable Aluminium Filter 4304</div> </div>

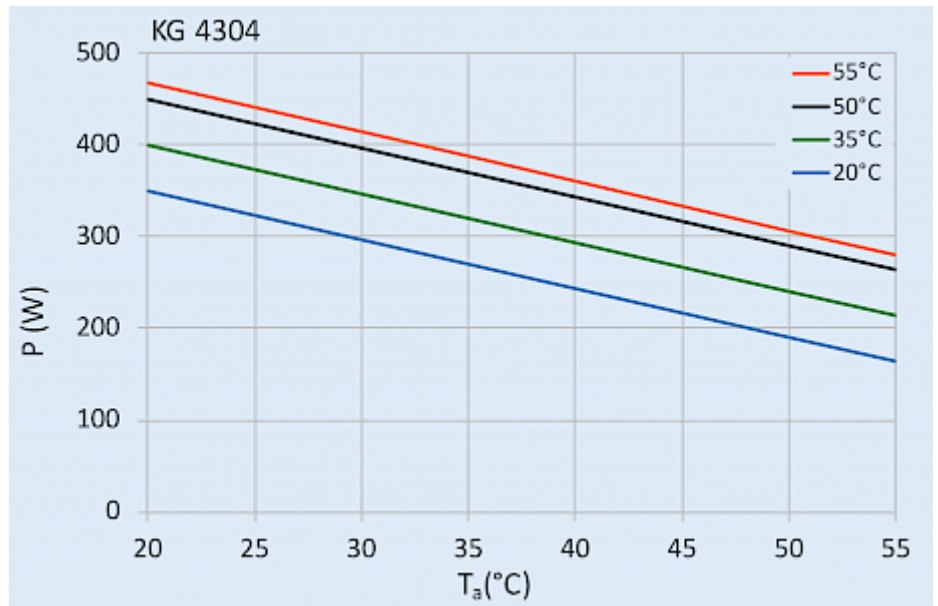
Technical Data

Cooling capacity L35L35 (EN14511-3):	360 W
Cooling capacity L35L50 (EN14511-3):	220 W
Compressor type:	Reciprocating compressor
Refrigerant / GWP:	R134a / 1430
Refrigerant charge:	79 g / 2.78 oz
High / low Pressure:	25 / 6 bar 365 / 88 psig
Air flow volume (system / unimpeded):	Ambient air circuit: 90 / 250 m ³ /h Cabinet air circuit: 115 / 136 m ³ /h
Operating Temperature Range:	10°C - 55°C
Mounting:	External
Dimensions A x B x C (D+E):	501.6 x 280 x 200 mm
Weight:	26 kg
Cut out dimensions:	480 x 240 mm
Voltage / Frequency:	120 V ~ 60 Hz
UL Voltage / Frequency:	115 V ~ 60 Hz
Current L35L35:	4.4 A
Starting current:	12.5 A
Max. current:	5.4 A
Nominal power L35L35:	440 W
Max. power:	550 W
Fuse:	10 A (T)
Short-circuit current rating:	5 kA
Connection:	Connection terminal block

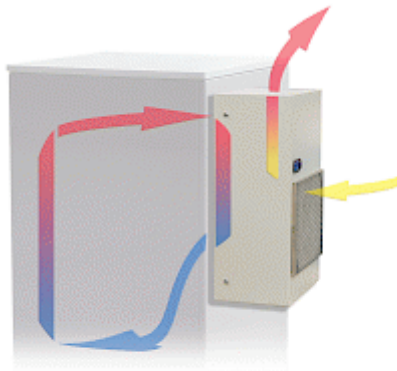
Please click on the graphics to download.

More CAD drawings can be found under [Product Download](#).

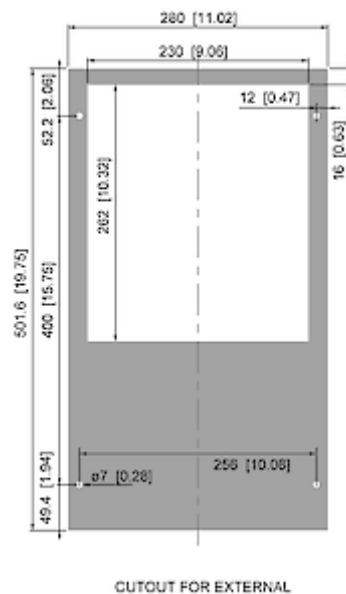
> [Overview Product Group COMPACT INDOOR - reliable and economical](#)

Performance graph:


click image to enlarge

Air flow:


click image to enlarge

Cut Out Dimension:


click image to enlarge

Order Information

Stainless steel housing part no.	4304102
Box dimensions	535 x 323 x 225 mm
Gross weight	27 kg
Taric code	84158200