

Filter fan SF 4725 - 230V



Description

Order Number:	4725082201
Brand Name:	SOLIVENT PRO
Colour:	RAL 7035
Housing Material:	PC plastic / RAL 7035
IP protection class to EN 60 529:	IP 54
UL Typ (UL 50E):	12
Note:	IP 55 with filter O3 (see manual)
Approvals:	CE, cURus, cULus
UL File Number:	E498756

Accessories:



[Hose-proof protection hood FC 4000 300](#)



[Hose-proof protection hood FC 4000 300 FDA](#)



[Thermostat 301050](#)

Technical Data


Air flow unimpeded IP 54:	235 / 264 m³/hr
Air flow with exhaust filter IP 54:	167 / 200 m³/hr
Operating Temperature Range:	-10°C - 60°C
Storage temperature range:	-40°C - 70°C
Mounting:	Wall mounted
Dimensions A x B x C (D+E):	255.4 x 255.5 x 112.5 (11.6+100.9) mm
Cut out dimensions:	224 x 224 mm
Voltage / Frequency:	230 V ~ 50/60 Hz
Rated current:	0.31 / 0.25 A
Power consumption:	45 / 39 W
Degree of separation IP 54:	67 % - DIN 24185
Degree of separation IP 55:	85 % - DIN 24185
Wall thickness:	1-3 mm
Noise level:	53 dB (A)
Fuse:	1 A (T)
Connection:	Spring terminal

Please click on the graphics to download.

More CAD drawings can be found under [Product Download](#).


> [Overview Product Group SOLIVENT PRO - Filter fans & exhaust filters](#)

Air flow:

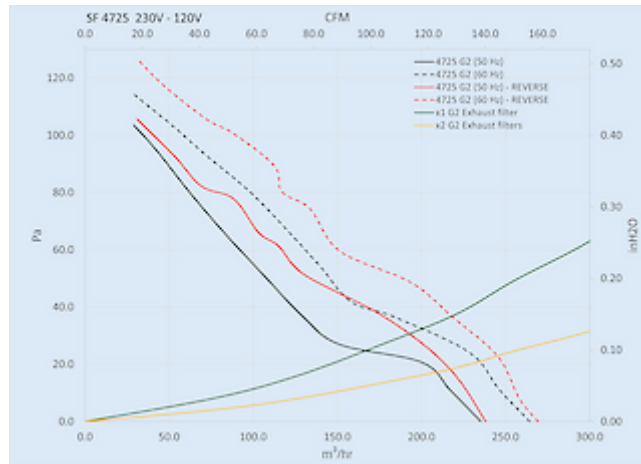


[click image to enlarge](#)

Cooling capacity:

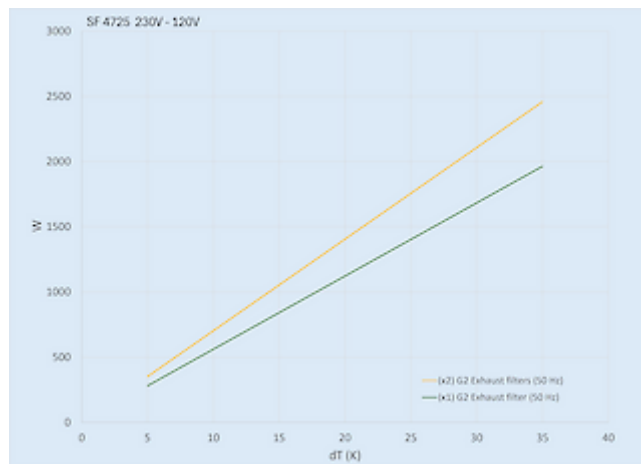

[click image to enlarge](#)

Dimensions:

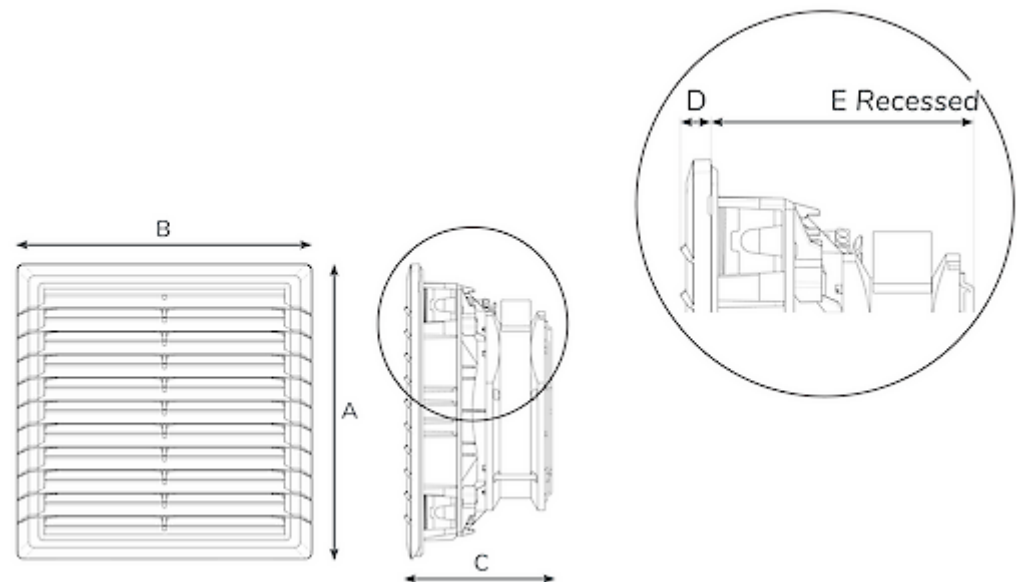

[click image to enlarge](#)

Order Information

Order number	IP rating	UL Type	RAL colour	Flow type ¹⁾	Air flow (m ³ /h) ²⁾	Air flow with exhaust filter (m ³ /h)
4725082203	54	12 / 3R	RAL 9005	B	235 / 264 m ³ /hr	167 / 200 m ³ /hr
4725083201	55	12 / 3R	RAL 7035	B	222 / 249 m ³ /hr	138 / 170 m ³ /hr
4725083203	55	12 / 3R	RAL 9005	B	222 / 249 m ³ /hr	138 / 170 m ³ /hr
472508R2201	54	12 / 3R	RAL 7035	S	238 / 269 m ³ /hr	
472508R2203	54	12 / 3R	RAL 9005	S	238 / 269 m ³ /hr	
472508R3201	55	12 / 3R	RAL 7035	S	220 / 252 m ³ /hr	
472508R3203	55	12 / 3R	RAL 9005	S	220 / 252 m ³ /hr	

¹⁾ B = Blowing - from ambient into the enclosure (standard version)
S = Suction - from enclosure to ambient (on request)

²⁾ unimpeded 50/60 Hz

Taric ode 84145915