

## Outdoor filter fan SF 4711 - 230V



### Description

|                                          |                  |
|------------------------------------------|------------------|
| <b>Order Number:</b>                     | 4711022003       |
| <b>Brand Name:</b>                       | SOLIVENT PRO     |
| <b>Colour:</b>                           | RAL 9005         |
| <b>Housing Material:</b>                 | PC plastic       |
| <b>IP protection class to EN 60 529:</b> | IP 54            |
| <b>UL Typ (UL 50E):</b>                  | 12, 3R           |
| <b>Approvals:</b>                        | CE, cURus, cULus |
| <b>UL File Number:</b>                   | E498756          |

## Technical Data


|                                               |                                   |
|-----------------------------------------------|-----------------------------------|
| <b>Air flow unimpeded IP 54:</b>              | 21 / 23 m³/hr                     |
| <b>Air flow with exhaust filter IP 54:</b>    | 12 / 13 m³/hr                     |
| <b>Air flow with 2 exhaust filters IP 54:</b> | 17 / 18 m³/hr                     |
| <b>Operating Temperature Range:</b>           | -40°C - 70°C                      |
| <b>Storage temperature range:</b>             | -40°C - 70°C                      |
| <b>Mounting:</b>                              | Wall mounted                      |
| <b>Dimensions A x B x C (D+E):</b>            | 115.5 x 115.5 x 80.6 (11.6+69) mm |
| <b>Weight:</b>                                | 0.3 kg                            |
| <b>Cut out dimensions:</b>                    | 92 x 92 mm                        |
| <b>Voltage / Frequency:</b>                   | 230 V ~ 50/60 Hz                  |
| <b>Rated current:</b>                         | 0.24 / 0.25 A                     |
| <b>Power consumption:</b>                     | 3.6 / 3.9 W                       |
| <b>Noise level:</b>                           | 32 dB(A)                          |
| <b>Fuse:</b>                                  | 1 A (T)                           |
| <b>Connection:</b>                            | Spring clamp                      |

Please click on the graphics to download.

More CAD drawings can be found under [Product Download](#).


> [Overview Product Group SOLIVENT PRO - Filter fans & exhaust filters](#)

### Air flow:

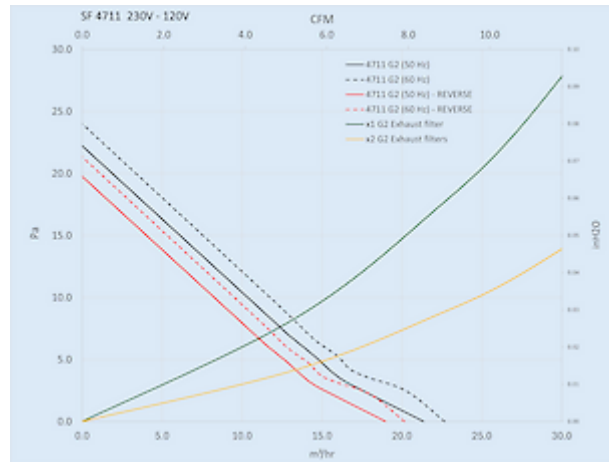


[click image to enlarge](#)

### Cooling capacity:

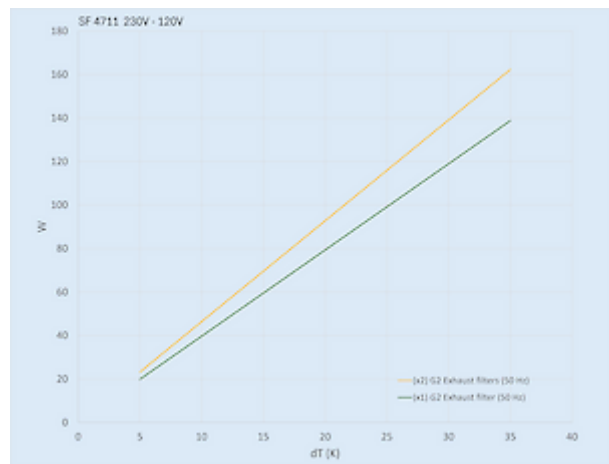

[click image to enlarge](#)

### Dimensions:

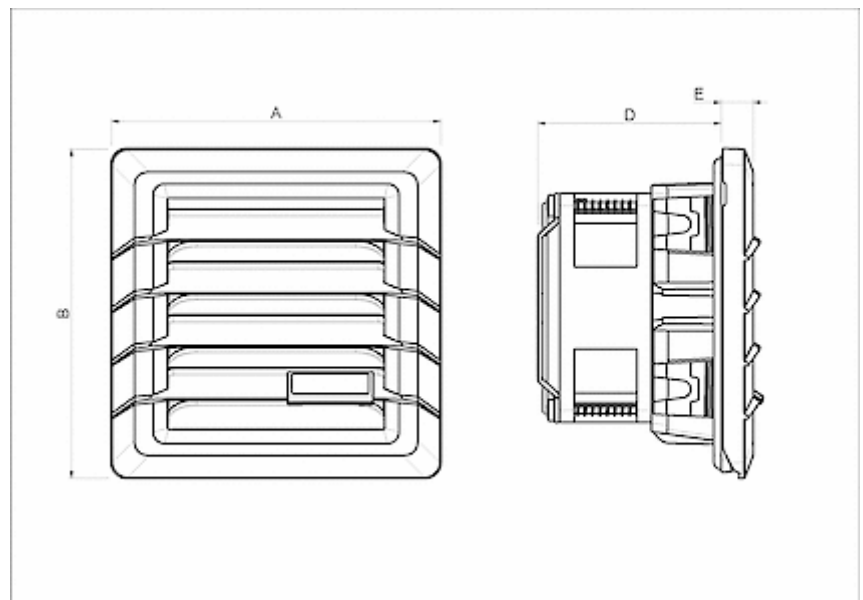

[click image to enlarge](#)

## Order Information

| Order number | IP rating | UL Type | RAL colour | Flow type <sup>1)</sup> | Air flow (m <sup>3</sup> /h) <sup>2)</sup> | Air flow with exhaust filter (m <sup>3</sup> /h) |
|--------------|-----------|---------|------------|-------------------------|--------------------------------------------|--------------------------------------------------|
| 4711022003   | 54        | 12 / 3R | RAL 9005   | B                       | 21 / 23 m <sup>3</sup> /hr                 | 12 / 13 m <sup>3</sup> /hr                       |
| 471102R2001  | 54        | 12 / 3R | RAL 7035   | S                       | 19 / 20 m <sup>3</sup> /hr                 |                                                  |
| 471102R2003  | 54        | 12 / 3R | RAL 9005   | S                       | 19 / 20 m <sup>3</sup> /hr                 |                                                  |

<sup>1)</sup> B = Blowing - from ambient into the enclosure (standard version)  
S = Suction - from enclosure to ambient (on request)

<sup>2)</sup> unimpeded 50/60 Hz