

Outdoor filter fan SF 4725 - 230V



Description

Order Number:	4725082203
Brand Name:	SOLIVENT PRO
Colour:	RAL 9005
Housing Material:	PC plastic / RAL 7035
IP protection class to EN 60 529:	IP 54
UL Typ (UL 50E):	12, 3R
Note:	IP 55 with filter O3 (see manual)
Approvals:	CE, cURus, cULus
UL File Number:	E498756

Technical Data


Air flow unimpeded IP 54:	235 / 264 m³/hr
Air flow with exhaust filter IP 54:	167 / 200 m³/hr
Operating Temperature Range:	-40°C - 60°C
Storage temperature range:	-40°C - 70°C
Mounting:	Wall mounted
Dimensions A x B x C (D+E):	255.4 x 255.5 x 112.5 (11.6+100.9) mm
Cut out dimensions:	224 x 224 mm
Voltage / Frequency:	230 V ~ 50/60 Hz
Rated current:	0.31 / 0.25 A
Power consumption:	45 / 39 W
Degree of separation IP 54:	67 % - DIN 24185
Degree of separation IP 55:	85 % - DIN 24185
Wall thickness:	1-3 mm
Noise level:	53 dB (A)
Fuse:	1 A (T)
Connection:	Spring terminal

Please click on the graphics to download.

More CAD drawings can be found under [Product Download](#).


> [Overview Product Group SOLIVENT PRO - Filter fans & exhaust filters](#)

Air flow:

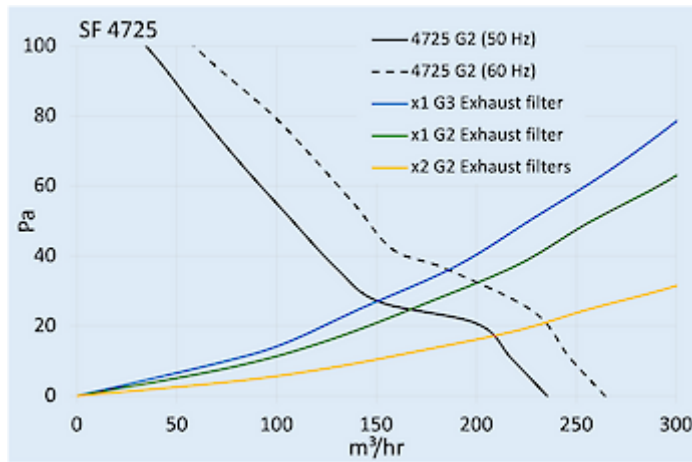


click image to enlarge

Cooling capacity:

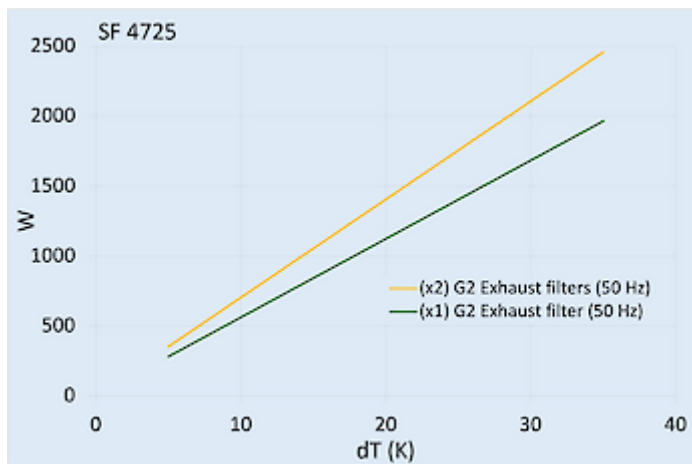

click image to enlarge

Dimensions:

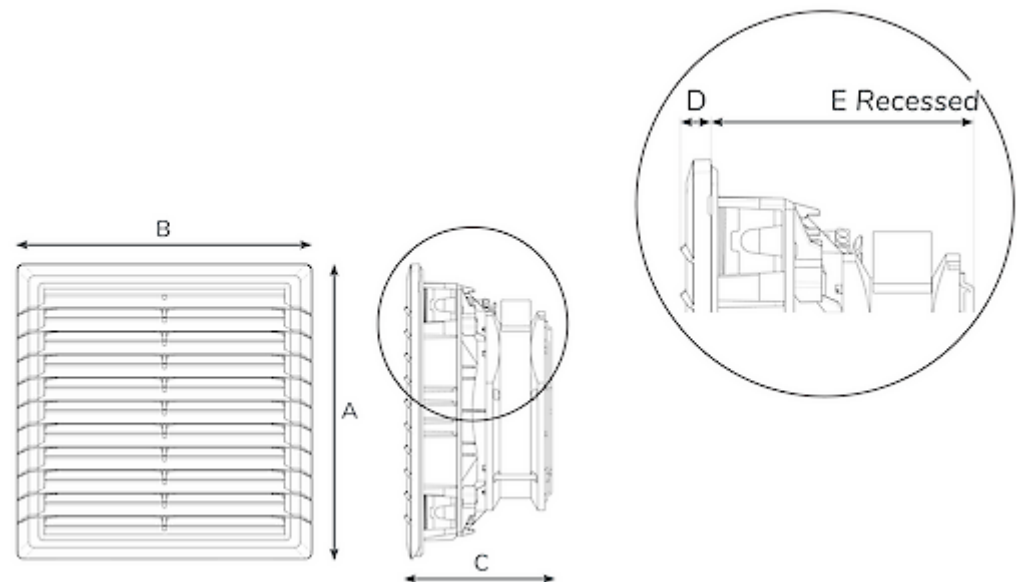

click image to enlarge

Order Information

Order number	IP rating	UL Type	RAL colour	Flow type ¹⁾	Air flow (m³/h) ²⁾	Air flow with exhaust filter (m³/h)
4725082201	IP 54		7035	B	235/264 m³/hr	167/209 m³/hr
4725082203	IP 54		9005	B	235/264 m³/hr	167/209 m³/hr
4725083201	IP 55		7035	B	220/245 m³/hr	135/165 m³/hr
4725083203	IP 55		9005	B	220/245 m³/hr	135/165 m³/hr
472508R2201	IP 54		7035	S	255/290 m³/hr	175/215 m³/hr
472508R2203	IP 54		9005	S	255/290 m³/hr	175/215 m³/hr
472508R3201	IP 55		7035	S	240/275 m³/hr	150/185 m³/hr
472508R3203	IP 55		9005	S	240/275 m³/hr	150/185 m³/hr

¹⁾ B = Blowing – from ambient into the enclosure (standard version)
S = Suction – from enclosure to ambient (on request)

²⁾ unimpeded 50/60 Hz

Taric ode 84145915