

Filter Fan



Description

| | |
|----------------------------|---|
| Order Number: | 4411A4100 |
| Brand Name: | SOLIFLEX |
| Colour: | RAL 7035 |
| Housing Material: | ABS Plastic |
| Ingress Protection: | IP 54, Type 12, 3R |
| Note: | Reverse air flow |
| Optional: | Different housing colors available on request |
| Approvals: | CE, cURus, cULus, CSA |

Accessories:



[Hose-proof protection hood FC 4000 200](#)



[Hose-proof protection hood FC 4000 200 FDA](#)



[Adjustable Thermostat NO](#)



[Filter media](#)

Technical Data

| | |
|-------------------------------------|---|
| Operating Temperature Range: | -10°C - 55°C |
| Air flow unimpeded: | 110 m ³ /h - 135 m ³ /h |
| Static pressure: | 100 Pa @ 50 Hz 120 Pa @ 60 Hz |
| Dimensions A x B x C (D+E): | 204 x 204 x 95.5 mm |
| Weight: | 1.2 kg |
| Cut out dimensions: | 177 x 177 (+1.5) mm |
| Voltage / Frequency: | 230 V ~ 50/60 Hz |
| Rated current: | 0.13 A / 0.11 A |
| Power consumption: | 19 W / 18 W |
| Degree of separation: | 85% - DIN 24185 |
| Wall thickness: | 1 - 2.1 mm |
| Filter class: | G3 according to EN 779 |
| Installation: | Elastic clips |
| Noise level: | 40 dB(A) @ 50 Hz 44 dB(A) @ 60 Hz |


Please click on the graphics to download.

More CAD drawings can be found under [Product Download](#).


> [Overview Product Group SOLIFLEX - Filter fans & exhaust filters](#)

Air flow:

Q = Air flow [m³/h]
 P = Static pressure [Pa]

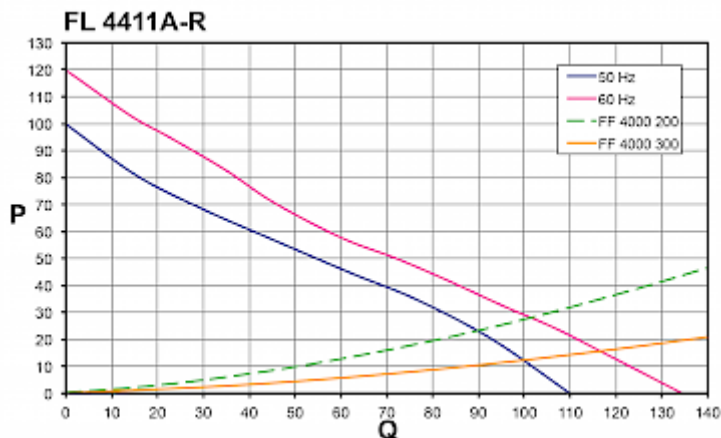

click image to enlarge

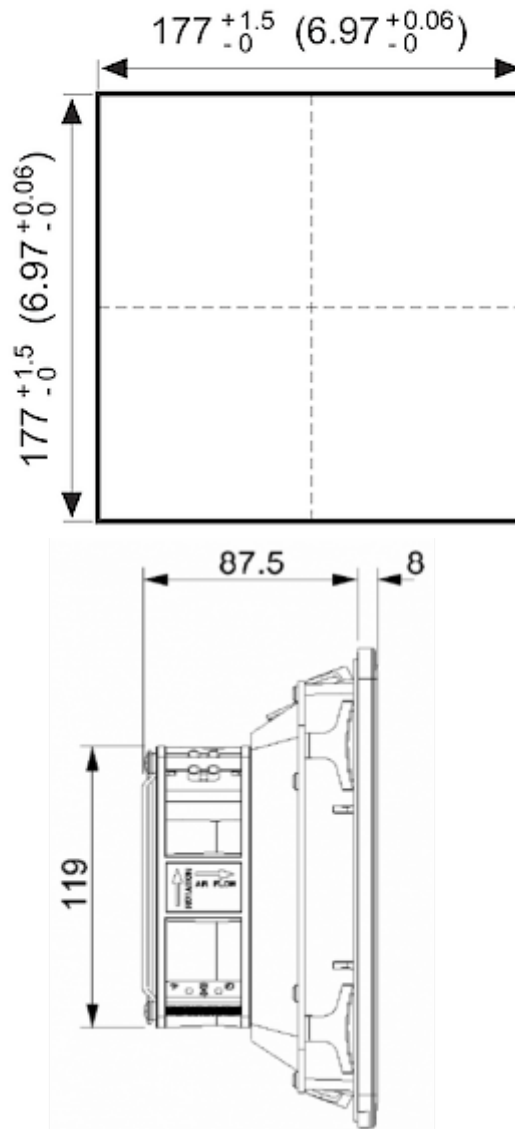Cut Out Dimension:


click image to enlarge

Order Information

| | |
|--------------------|---------------|
| In RAL 9005 | 4411A4103 |
| Taric code | 84145915 |
| GTIN (EAN) | 5350604100367 |