

## Roof Fan



## Description

**Order Number:** 6060A4000

**Colour:** RAL 7035

**Housing Material:** ABS Plastic

**Ingress Protection:** IP 54

**Approvals:** CE, cURus

**Accessories:**



Adjustable Thermostat NO

## Technical Data

<b>Operating Temperature Range:</b>	-10°C - 55°C
<b>Air flow unimpeded:</b>	420 m <sup>3</sup> /h
<b>Static pressure:</b>	340 Pa @ 50 Hz 480 Pa @ 60 Hz
<b>Mounting:</b>	top mounted
<b>Dimensions A x B x C (D+E):</b>	324 x 324 x 94 mm
<b>Weight:</b>	2.1 kg
<b>Cut out dimensions:</b>	175 x 175 mm
<b>Voltage / Frequency:</b>	230 V ~ 50/60 Hz
<b>Rated current:</b>	0.31 A / 0.36 A
<b>Power consumption:</b>	70 W / 81 W
<b>Degree of separation:</b>	85% - DIN 24185
<b>Filter class:</b>	G3 according to EN 779
<b>Installation:</b>	4 x Ø 16 mm screws for thermoplastic material
<b>Noise level:</b>	67.9 dB(A) @ 50 Hz 71 dB(A) @ 60 Hz


Please click on the graphics to download.

More CAD drawings can be found under [Product Download](#).


> [Overview Product Group SOLIFLEX - Filter fans & exhaust filters](#)

**Air flow:**

Q = Air flow  
[m<sup>3</sup>/h]  
P = Static  
pressure  
[Pa]

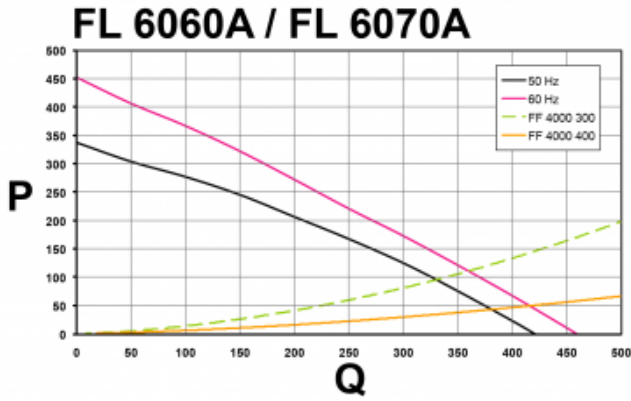

[click image to enlarge](#)

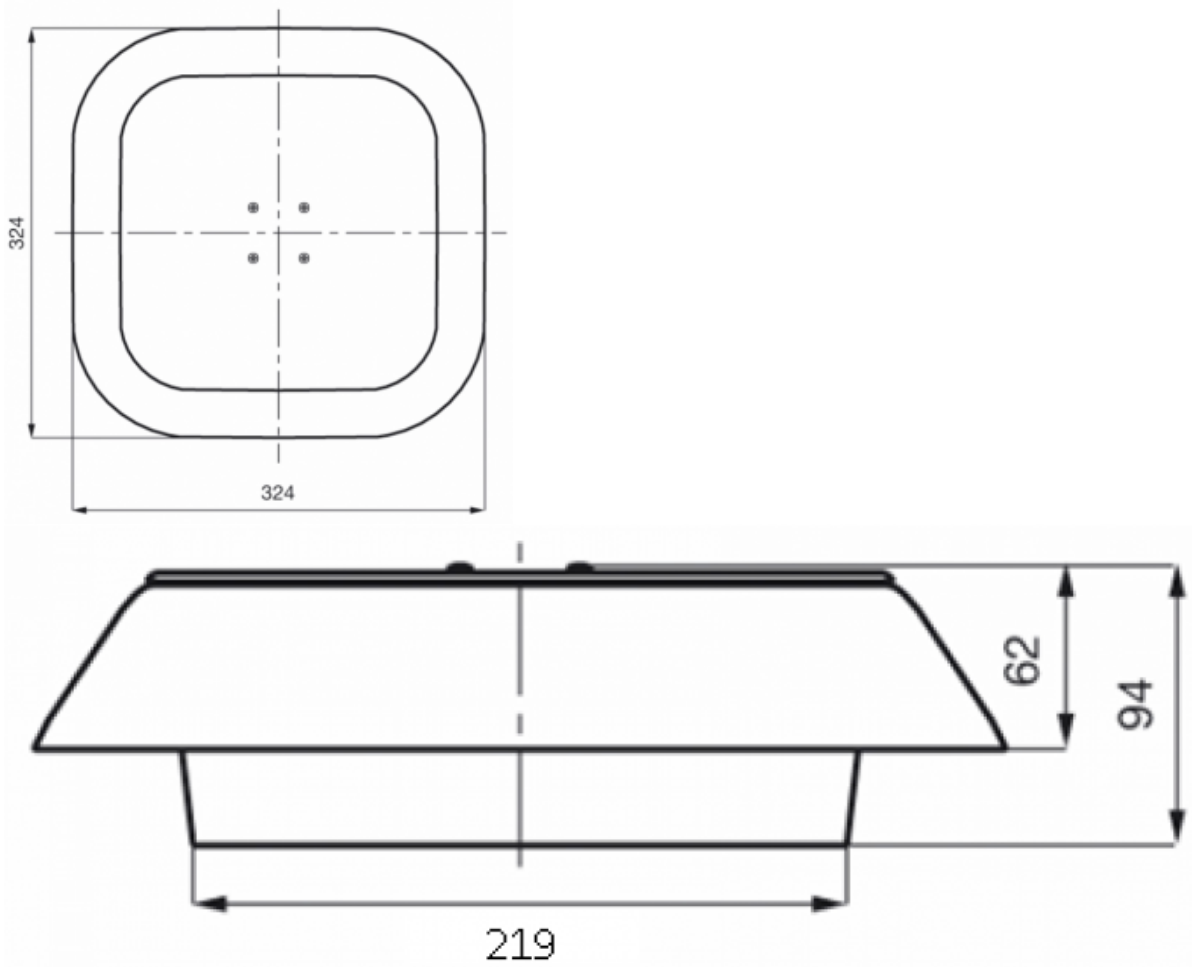**Cut Out  
Dimension:**


[click image to enlarge](#)

## Order Information

<b>Taric code</b>	84145915
<b>GTIN (EAN)</b>	5350604100893