

Roof Fan



Description

Order Number: 6060A4000

Colour: RAL 7035

Housing Material: ABS Plastic

Ingress Protection: IP 54

Approvals: CE, cURus

Accessories:



Adjustable Thermostat NO

Technical Data

Operating Temperature Range:	-10°C - 55°C
Air flow unimpeded:	420 m ³ /h
Static pressure:	340 Pa @ 50 Hz 480 Pa @ 60 Hz
Mounting:	top mounted
Dimensions A x B x C (D+E):	324 x 324 x 94 mm
Weight:	2.1 kg
Cut out dimensions:	175 x 175 mm
Voltage / Frequency:	230 V ~ 50/60 Hz
Rated current:	0.31 A / 0.36 A
Power consumption:	70 W / 81 W
Degree of separation:	85% - DIN 24185
Filter class:	G3 according to EN 779
Installation:	4 x Ø 16 mm screws for thermoplastic material
Noise level:	67.9 dB(A) @ 50 Hz 71 dB(A) @ 60 Hz


Please click on the graphics to download.

More CAD drawings can be found under [Product Download](#).


> [Overview Product Group SOLIFLEX - Filter fans & exhaust filters](#)

Air flow:

Q = Air flow
[m³/h]
P = Static
pressure
[Pa]

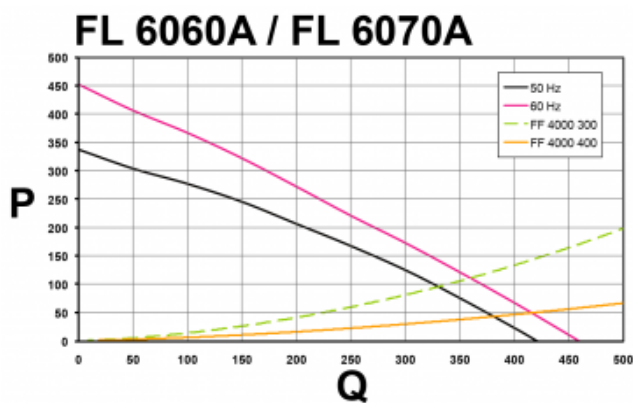

[click image to enlarge](#)

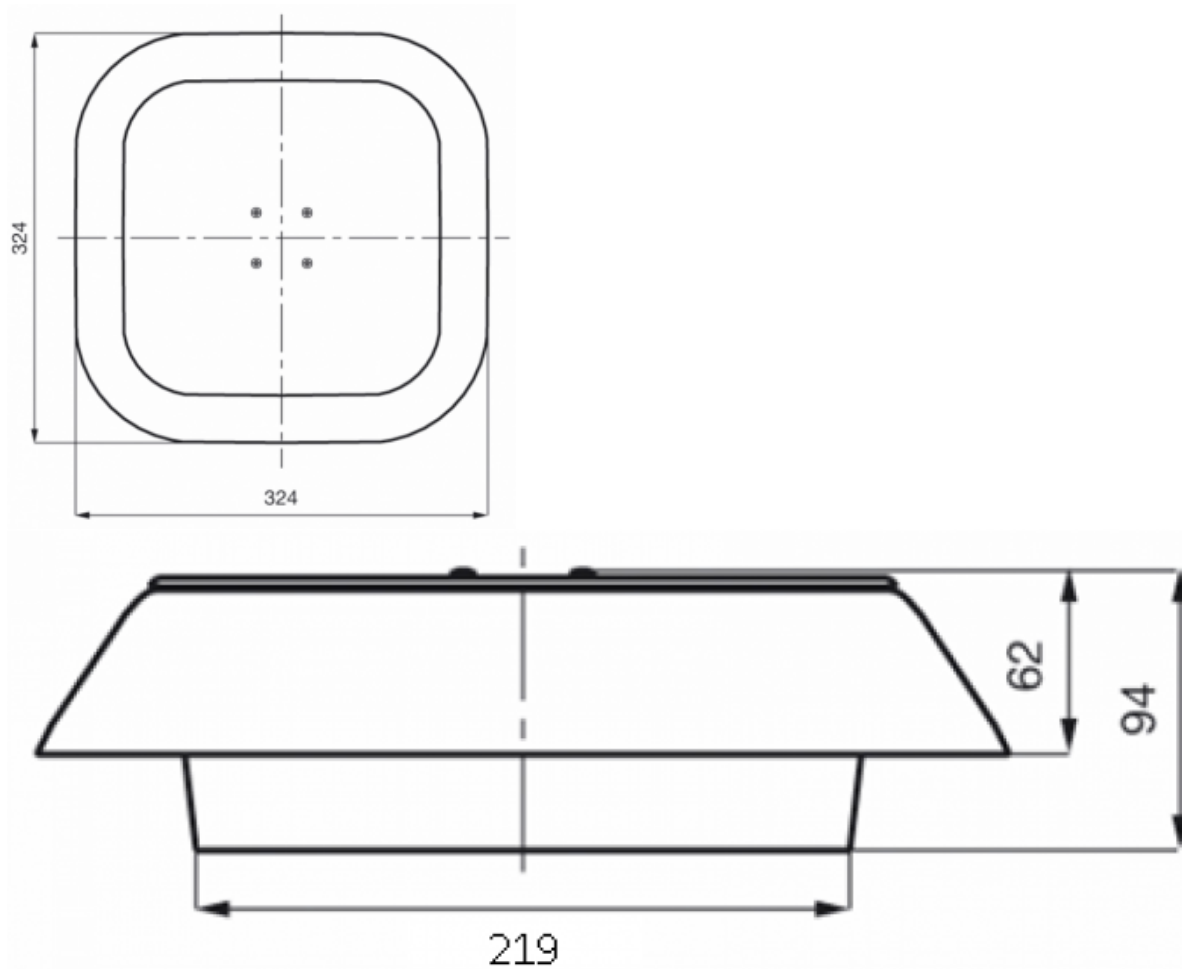**Cut Out
Dimension:**


[click image to enlarge](#)

Order Information

Taric code	84145915
GTIN (EAN)	5350604100893