

## Air to Water Heat Exchanger



### Description

|                            |                               |
|----------------------------|-------------------------------|
| <b>Order Number:</b>       | 752500B001                    |
| <b>Brand Name:</b>         | SLIMLINE HEX                  |
| <b>Color:</b>              | RAL 7035                      |
| <b>Housing Material:</b>   | Mild steel, powder coated     |
| <b>Ingress protection:</b> | IP 55 / Type 12, 3, 3R, 4, 4X |
| <b>Approvals:</b>          | CE, cURus, cULus              |

## Technical data

**Cooling capacity 95F/W50F (132 GPH):**2800 W

**Coolant:** Water, light oils or similar

**Operating temperature range:** 1°C - 60°C

**Air volume flow (system / unimpeded):**560 / 800 m<sup>3</sup>/h

**Mounting:** Wandanbau / Halbeinbau

**Dimension H x W x D:** 1,350 x 395 x 192 (37+155) mm

**Weight:** 28 kg

**Voltage / Frequency:** 230 V ~ 50/60 Hz

**Starting current:** 0.6 / 0.6 A

**Max. current:** 0.4 / 0.5 A

**Power consumption:** 75 W

**Max. power:** 90 / 110 W


**Pressure water circuit:** 10 bar

**Water connection:** Rp 1/2" - Innengewinde (mit optionalen Anschlüssen für Rohrrinnendurchmesser von 13 mm)

**Fuse:** 1 A (T)

**Connection:** 5-polige Anschlussklemme für Signale  
4-polige Anschlussklemme für Spannung

**Cut out dimensions:**

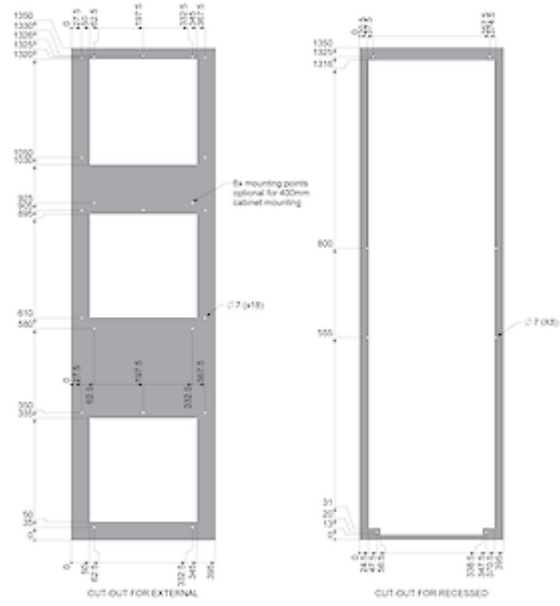

## Order Information

|   |                     |
|---|---------------------|
| <b>Stainless steel housing part no.</b> | 752500B62           |
| <b>Verpackungsmaße</b>                  | 1442 x 495 x 242 mm |
| <b>Bruttogewicht</b>                    | 35 kg               |
| <b>Taric code</b>                       | 84158300            |