

Roof Filter Fan




Description

| | |
|----------------------------|--|
| Order Number: | 6064A4000 |
| Brand Name: | SOLIFLEX |
| Color: | RAL 7035 |
| Housing Material: | Mild steel, powder coated |
| Ingress protection: | IP 54, Type 1, 12 |
| Included: | G3 Filter |
| Optional: | Aluminium filter kit Temperature control thermostat Alarm thermostat |
| Approvals: | CE, cURus |

Technical data

| | |
|--|------------------------------|
| Operating temperature range: | -10°C - 55°C |
| Air volume flow (system / unimpeded): | 285 m ³ /hr |
| Air volume flow unimpeded: | 290 cfm |
| Static pressure: | 63 Pa |
| Mounting: | top mounted |
| Dimension H x W x D: | 5.8 x 18 x 18 inch |
| Weight: | 7 kg |
| Cut out dimensions: | 11.46 x 11.46 inch |
| Voltage / Frequency: | 230 V ~ 50/60 Hz |
| Rated current: | 0.3 A |
| Power consumption: | 57 W |
| Degree of separation: | 85% - DIN 24185 |
| Filter class: | G3 (Aluminium optional) |
| Noise level: | 51 dB(A) |
| Connection: | 4 - poliger Push-fit Stecker |

Cut out dimensions:

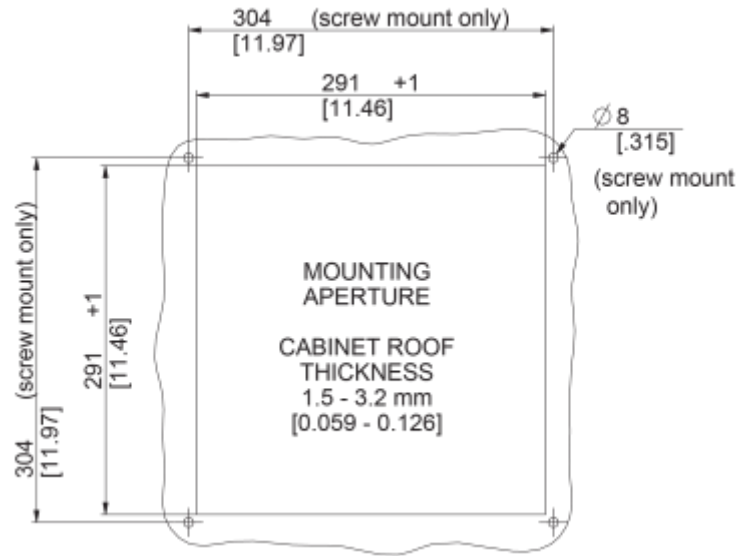

Order Information

| | |
|-------------------|---------------|
| Taric code | 84145915 |
| GTIN (EAN) | 5350604100893 |