

Filter Fan



Description


Order Number:	4620A4100
Brand Name:	SOLIFLEX
Color:	RAL 7035
Housing Material:	ABS Plastic
Ingress protection:	IP 54, Type 12, 3R
Note:	Umgekehrter Luftstrom
Optional:	Different housing colours available on request With NEMA 3R protection part no. 4620A4130
Approvals:	CE, cURus, cULus, CSA

Technical data


Operating temperature range:	14°F - +131°F
Air volume flow unimpeded:	144 cfm / 171 cfm
Static pressure:	0.66 inH ₂ O @ 50Hz 0.84 inH ₂ O @ 60Hz
Dimension H x W x D:	9.8 x 9.8 x 4.9 inch
Weight:	3.3 lbs
Cut out dimensions:	8.8 x 8.8 (+0.06) inch
Voltage / Frequency:	230 V ~ 50/60 Hz
Rated current:	0.135 A / 0.16 A
Power consumption:	32 W / 36 W
Wall thickness:	0.06 - 0.10 in.
Filter class:	G3 according to EN 779
Installation:	Elastic clips or by 4 self-threading screws
Noise level:	50 dB(A) @ 50 Hz 55 dB(A) @ 60 Hz

Air flow:

Q = Air flow [m³/h]
P = Static pressure [Pa]

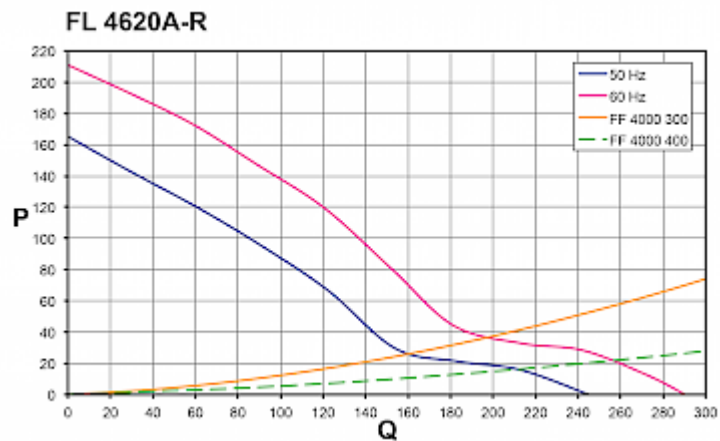

Cut out dimensions:

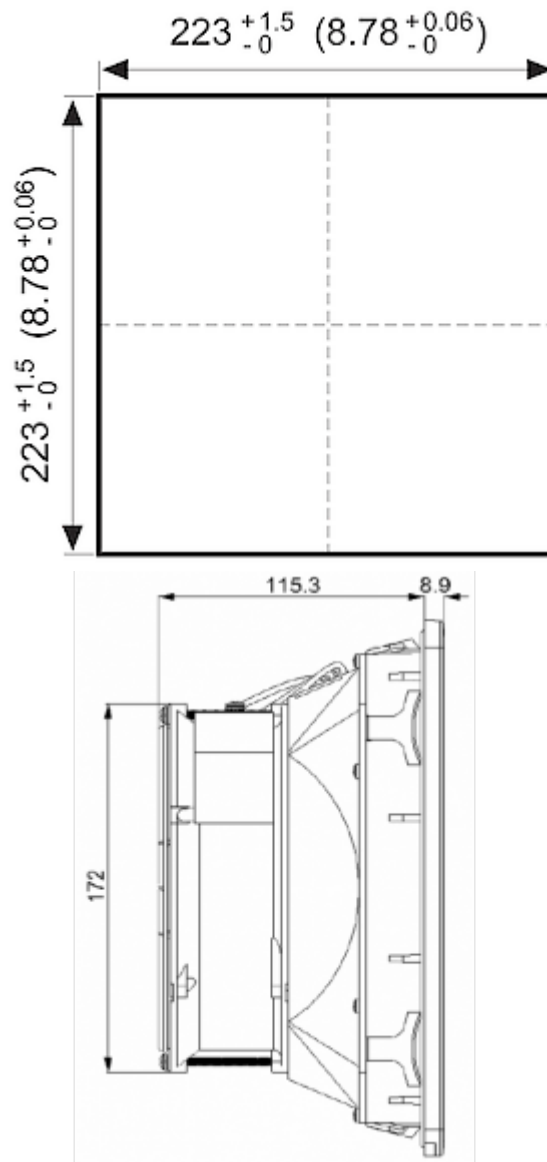

Order Information

In RAL 9005	4620A4103
Taric code	84145915
GTIN (EAN)	5350604100541