

## Filterless enclosure air conditioner




### Description

<b>Order Number:</b>	42660001
<b>Brand Name:</b>	SLIMLINE
<b>Color:</b>	RAL 7035
<b>Housing Material:</b>	Mild steel, powder coated
<b>Ingress protection:</b>	TYPE 12
<b>Approvals:</b>	CE, cURus, cULus


## Technical data

<b>Cooling capacity 95F/95F:</b>	1130 BTU
<b>Cooling capacity 95F/122F:</b>	510 BTU
<b>Compressor type:</b>	Rotary piston compressor
<b>Refrigerant / GWP:</b>	R134a / 1430
<b>Refrigerant charge:</b>	105 g / 3.7 oz
<b>High / low pressure:</b>	20 / 13 bar 290 / 188 psig
<b>Operating temperature range:</b>	50°F - 122°F
<b>Air volume flow (system / unimpeded):</b>	Ambient air circuit: 100 / 147 cfm Cabinet air circuit: 74 / 147 cfm
<b>Mounting:</b>	Wall mounted / Recessed
<b>Dimension H x W x D:</b>	20.5 x 10.6 x 4.3 inch
<b>Weight:</b>	29 lbs.
<b>Cut out dimensions:</b>	19.7 x 9.9 inch
<b>Voltage / Frequency:</b>	230 V ~ 50/60 Hz
<b>UL Voltage / Frequency:</b>	230 V ~ 60 Hz
<b>Current 95F95F:</b>	1.5 A @ 50 Hz 1.6 A @ 60 Hz
<b>Starting current:</b>	3.2 A
<b>Max. current:</b>	2.3 A
<b>Nominal power 95F95F:</b>	315 W @ 50 Hz 335 W @ 60 Hz
<b>Max. power:</b>	375 W
<b>Fuse:</b>	6 A (T)
<b>Short-circuit current rating:</b>	5 kA
<b>Rated current compressor:</b>	3.1 A
<b>Full load current fans:</b>	2.3 A
<b>Connection:</b>	Connection terminal block


**Performance graph:**

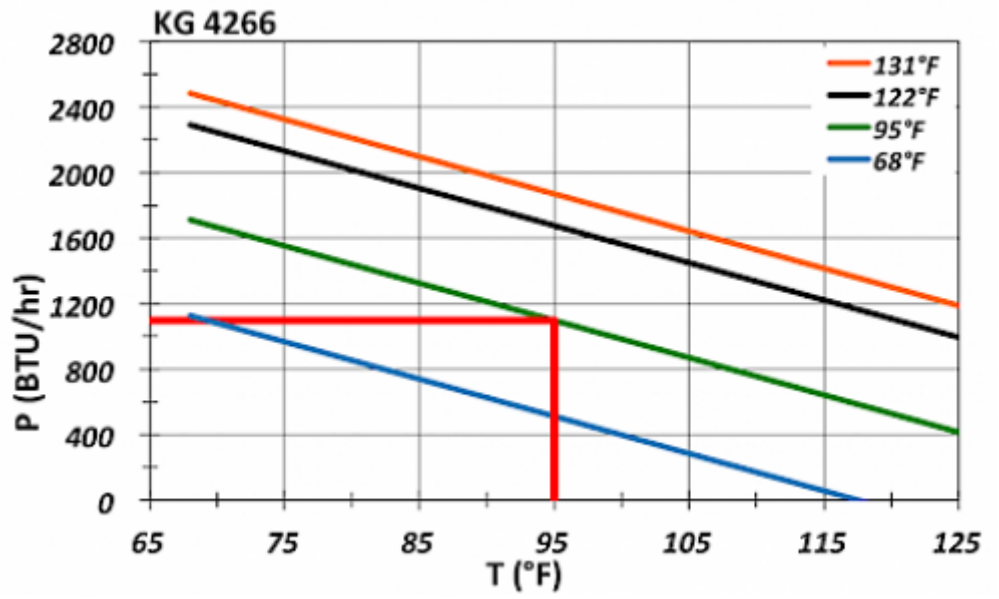

**Air flow:**

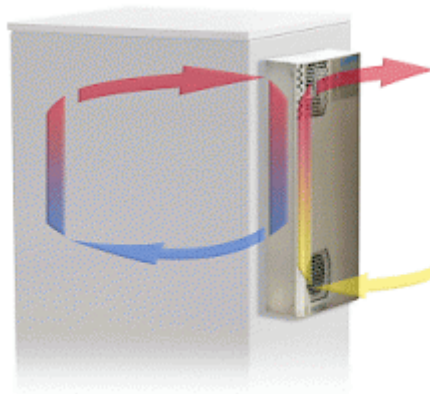

**Cut out dimensions:**

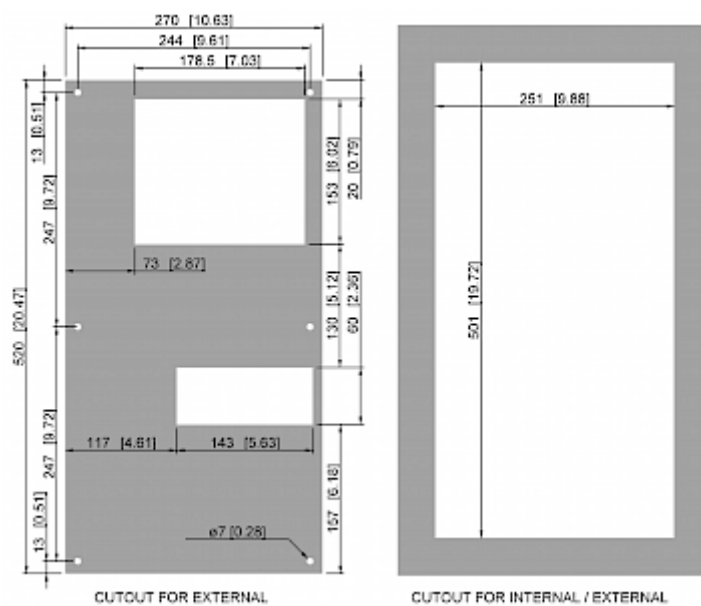

## Order Information

<b>Verpackungsmaße</b>	580 x 290 x 150 mm
<b>Bruttogewicht</b>	14.5 kg
<b>Taric code</b>	84158200
<b>GTIN (EAN)</b>	5350604370005