

Enclosure air conditioner




Description

| | |
|----------------------------|---------------------------|
| Order Number: | 43050001 |
| Brand Name: | COMPACT INDOOR |
| Color: | RAL 7035 |
| Housing Material: | Mild steel, powder coated |
| Ingress protection: | TYPE 12 |
| Approvals: | CE, cURus, cULus |


Technical data

| | |
|--|--|
| Cooling capacity 95F/95F: | 2120 BTU |
| Cooling capacity 95F/122F: | 1500 BTU |
| Compressor type: | Reciprocating compressor |
| Refrigerant / GWP: | R134a / 1430 |
| Refrigerant charge: | 127 g / 4.5 oz |
| High / low pressure: | 23.3 / 5.3 bar 338 / 77 psig |
| Operating temperature range: | 68°F - 131°F |
| Air volume flow (system / unimpeded): | Ambient air circuit: 256 / 324 cfm Cabinet air circuit: 118 / 147 cfm |
| Mounting: | Wandanbau |
| Dimension H x W x D: | 650 x 315 x 260 mm |
| Weight: | 61 lbs. |
| Cut out dimensions: | 25.00 x 10.83 in. |
| Voltage / Frequency: | 230 V ~ 50/60 Hz |
| UL Voltage / Frequency: | 230 V ~ 60 Hz |
| Current 95F95F: | 2.1 A |
| Starting current: | 9.8 A |
| Max. current: | 2.5 A |
| Nominal power 95F95F: | 370 W @ 50 Hz 400 W @ 60 Hz |
| Max. power: | 510 W |
| Fuse: | 6 A (T) |
| Short-circuit current rating: | 5 kA |
| Connection: | Connection terminal block |


Performance graph:

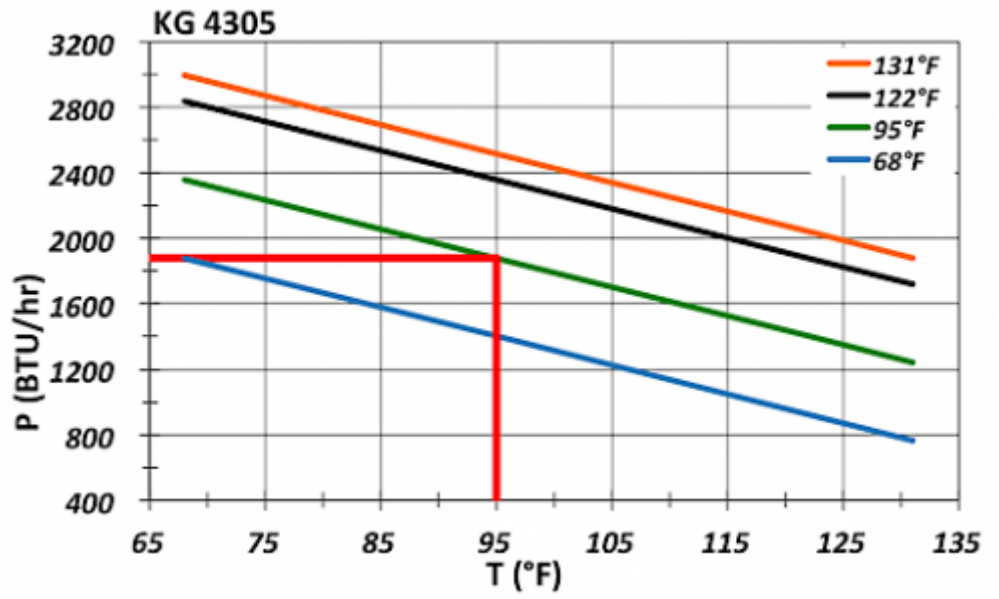

Air flow:

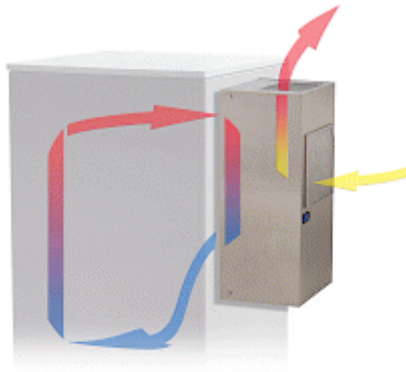

Cut out dimensions:

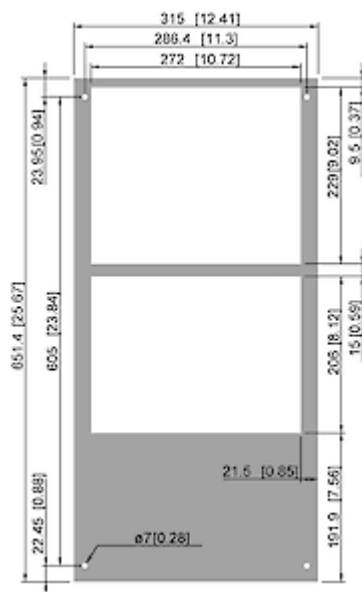

Order Information

| | |
|---|--------------------|
| Stainless steel housing part no. | 4305002 |
| Mit Kondensatverdunstung Bestell Nr. | 43050101 |
| Verpackungsmaße | 685 x 353 x 295 mm |
| Bruttogewicht | 29.5 kg |
| Taric code | 84158200 |