

## Air to Water Heat Exchanger



### Description


<b>Order Number:</b>	2125210
<b>Brand Name:</b>	SLIMLINE HEX
<b>Color:</b>	RAL 7035
<b>Housing Material:</b>	Mild steel, powder coated
<b>Ingress protection:</b>	NEMA 12
<b>Optional:</b>	With solenoid valve part no. 2125200
<b>Approvals:</b>	CE

## Technical data


<b>Cooling capacity 95F/W50F (53 GPH):</b>	8530 BTU
<b>Cooling capacity 95F/W50F (132 GPH):</b>	11090 BTU
<b>Coolant:</b>	Water, light oils or similar
<b>Operating temperature range:</b>	+34°F - +162°F
<b>Air volume flow (system / unimpeded):</b>	294 / 750 cfm @ 50 Hz 311 / 824 cfm @ 60 Hz
<b>Mounting:</b>	Wall mounted / Internal
<b>Dimension H x W x D:</b>	36.85 x 10.31 x 5.77 in.
<b>Weight:</b>	39.68 lbs
<b>Voltage / Frequency:</b>	380-415 V 50 Hz 3~ 400-460 V 60 Hz 3~
<b>Starting current:</b>	0.54 A / 0.66 A
<b>Max. current:</b>	0.27 A / 0.33 A
<b>Max. power:</b>	235 W
<b>Water connection:</b>	Rp 1/4" - inside thread with 2 connectors for pipe internal diameter of 0.39 in.
<b>Fuse:</b>	3 x 3 A (T)
<b>Connection:</b>	Connection terminals

**Performance graph:**


$\Delta T$  = Temperature difference between enclosure air and coolant  
P = Cooling Capacity

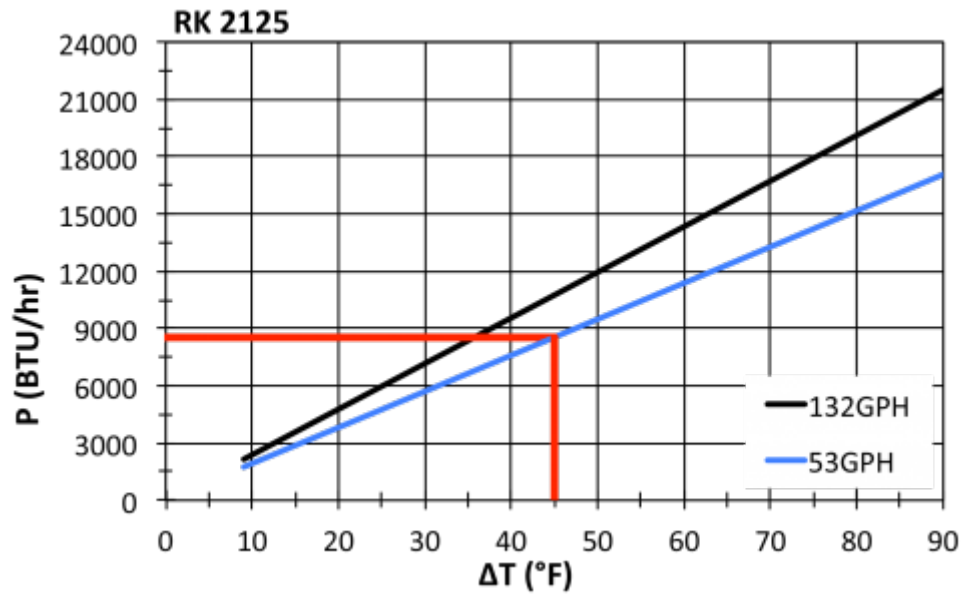

**Air flow:**

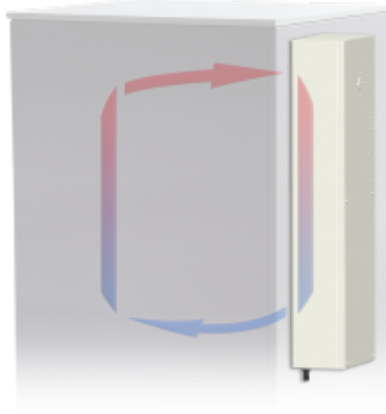

**Cut out dimensions:**

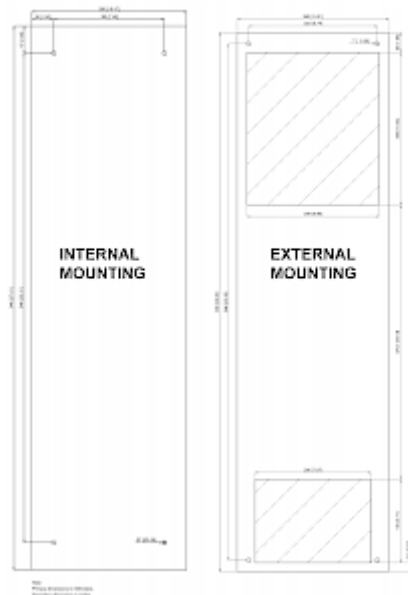

## Order Information

<b>Stainless steel housing part no.</b>	2125212
<b>With proportional water flow regulator part no. *** (control range +20°C - +50°C)</b>	2125200
<b>Verpackungsmaße</b>	1033.6 x 279 x 183.5 mm
<b>Bruttogewicht</b>	21 kg
<b>Taric code</b>	84158300
<b>GTIN (EAN)</b>	5350604210882