

Filter Fan



Description


Order Number:	4830A9000
Brand Name:	SOLIFLEX
Color:	RAL 7035
Housing Material:	ABS Plastic
Ingress protection:	IP 54, Type 12, 3R
Optional:	Different housing colours available on request With NEMA 3R protection part no. 4830A9030
Approvals:	CE, cURus, cULus

Technical data



Operating temperature range:	14°F - +158°F
Air volume flow unimpeded:	317 cfm
Static pressure:	0.72 inH2O
Dimension H x W x D:	12.8 x 12.8 x 6.3 in.
Weight:	6.8 lbs
Cut out dimensions:	11.5 x 11.5 in.(+0.06)
Voltage / Frequency:	380-415 V 50 Hz 3~ 400-460 V 60 Hz 3~
Rated current:	0.25 A
Power consumption:	169 W
Degree of separation:	85% - DIN 24185
Wall thickness:	0.06 - 0.10 in.
Filter class:	G3 according to EN 779
Installation:	Elastic clips
Noise level:	69.8 dB(A) @ 50 Hz 72.7 dB(A) @ 60 Hz

Air flow:

Q = Air flow [m³/h]
 P = Static pressure [Pa]

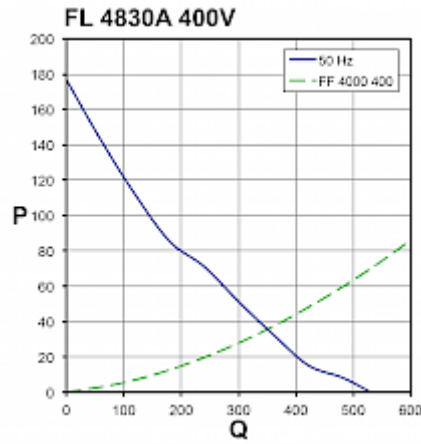

Cut out dimensions:

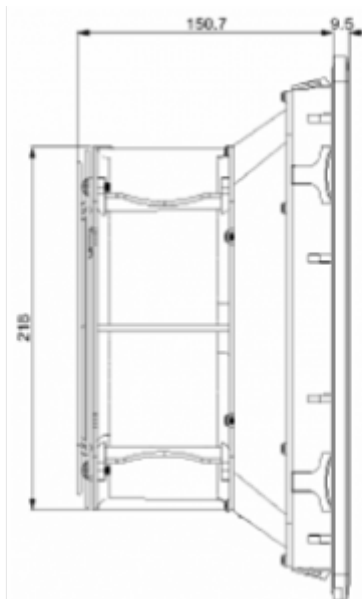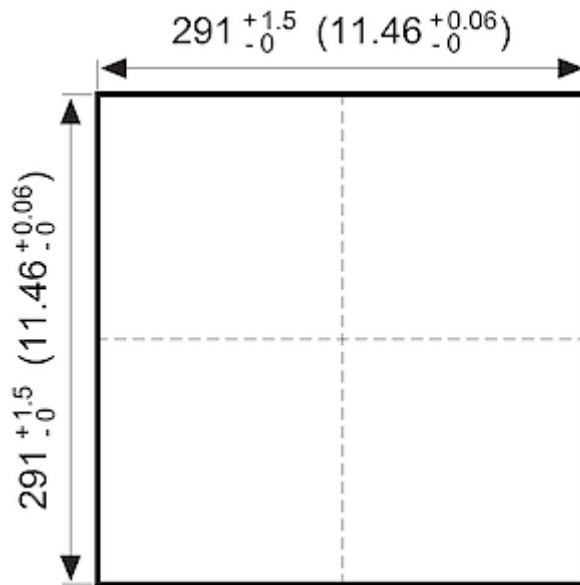

Order Information

In RAL 9005	4830A9003
Taric code	84145915
GTIN (EAN)	5350604100640