

## Filterless enclosure air conditioner




### Description

|                            |                                |
|----------------------------|--------------------------------|
| <b>Order Number:</b>       | 4266102                        |
| <b>Brand Name:</b>         | SLIMLINE                       |
| <b>Housing Material:</b>   | Stainless steel AISI 304 (V2A) |
| <b>Ingress protection:</b> | TYPE 12                        |
| <b>Approvals:</b>          | CE, cURus, cULus               |


## Technical data

|  |   |
|--|---|
| <b>Cooling capacity 95F/95F:</b>             | 1130 BTU  |
| <b>Cooling capacity 95F/122F:</b>            | 1060 BTU (122F/122F)  |
| <b>Compressor type:</b>                      | Rotary piston compressor                                    |
| <b>Refrigerant / GWP:</b>                    | R134a / 1430  |
| <b>Refrigerant charge:</b>                   | 96 g / 3.4 oz   |
| <b>High / low pressure:</b>                  | 35 / 30 bar<br>250 / 220 psig                               |
| <b>Operating temperature range:</b>          | 50°F - 122°F  |
| <b>Air volume flow (system / unimpeded):</b> | Ambient air circuit: 100 cfm<br>Cabinet air circuit: 74 cfm |
| <b>Mounting:</b>                             | Wall mounted / Recessed                                     |
| <b>Dimension H x W x D:</b>                  | 20.5 x 10.6 x 4.3 inch                                      |
| <b>Weight:</b>                               | 29 lbs.   |
| <b>Cut out dimensions:</b>                   | 19.7 x 9.9 inch   |
| <b>Voltage / Frequency:</b>                  | 120 V ~ 60 Hz   |
| <b>Current 95F95F:</b>                       | 0 Hz  |
| <b>Starting current:</b>                     | 7.1 A   |
| <b>Max. current:</b>                         | 4.2 A   |
| <b>Nominal power 95F95F:</b>                 | 315 W   |
| <b>Max. power:</b>                           | 375 W   |
| <b>Fuse:</b>                                 | 6 A (T)   |
| <b>Short-circuit current rating:</b>         | 5 kA  |
| <b>Rated current compressor:</b>             | 9.2 A   |
| <b>Full load current fans:</b>               | 3.6 A   |
| <b>Connection:</b>                           | Connection terminal block                                   |


**Performance graph:**

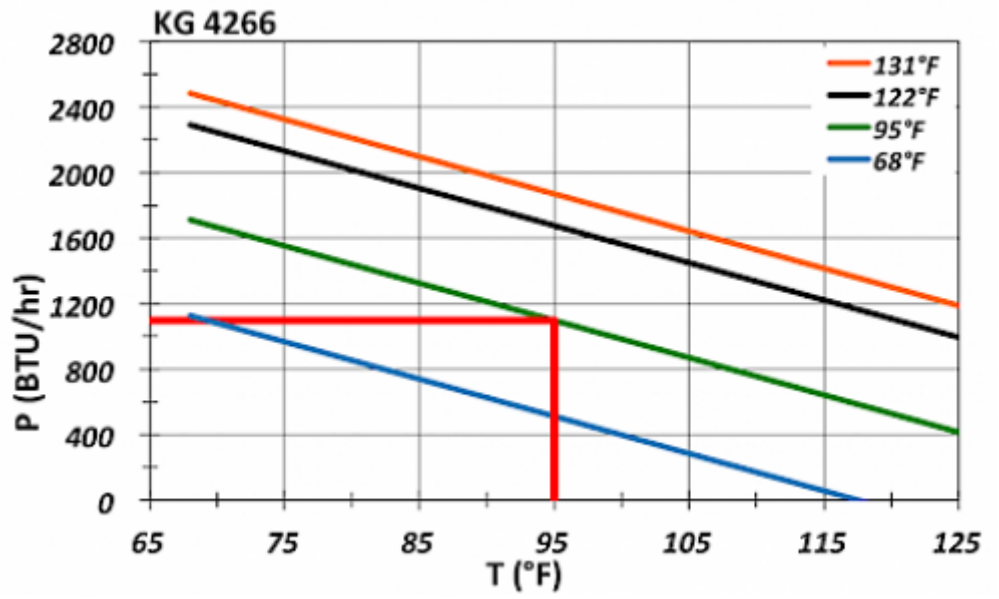

**Air flow:**

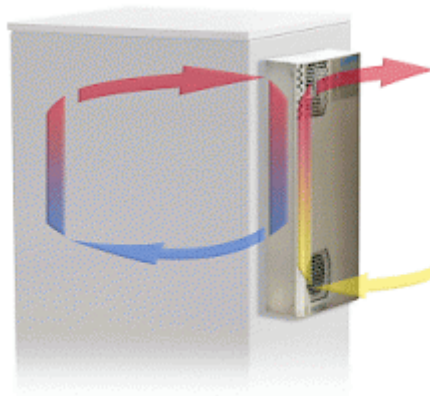

**Cut out dimensions:**

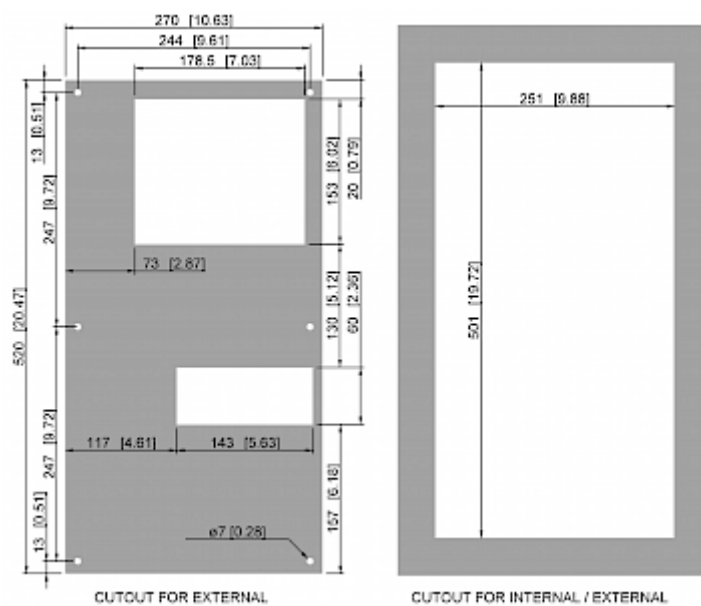

## Order Information

|                        |                    |
|------------------------|--------------------|
| <b>Verpackungsmaße</b> | 580 x 290 x 150 mm |
| <b>Bruttogewicht</b>   | 14.5 kg            |
| <b>Zolltarifnummer</b> | 84158200           |
| <b>EAN Nummer</b>      | 5350604370142      |