

Thermoelectric cooler




Description

| | |
|----------------------------|--|
| Order Number: | 6405325 |
| Brand Name: | SOLITHERM PELTIER |
| Housing Material: | Stainless steel AISI 304 (V2A) |
| Ingress protection: | IP 66 / UL Type 12, 4, 4X |
| Included: | Kondensatablaufstutzen |
| Note: | The torque for the mounting nuts should be 4.5 Nm. |
| Approvals: | CE, cURus |


Technical data

| | |
|--|--|
| Cooling capacity 95F/95F: | 1370 BTU |
| Operating temperature range: | -4°F - 149°F |
| UL temperature range: | -20°C - 65°C |
| Air volume flow (system / unimpeded): | Ambient air circuit: 141 / 191 cfm Cabinet air circuit: 141 / 191 cfm |
| Mounting: | External (with frame) |
| Dimension H x W x D: | 23.6 x 17 x 8 inch |
| Weight: | 82 lbs. |
| Cut out dimensions: | 7.9 x 21.6 inch |
| Voltage / Frequency: | 230 V ~ 50/60 Hz |
| Current 95F95F: | 2.1 A |
| Starting current: | 3.4 A |
| Max. current: | 2.3 A |
| Nominal power 95F95F: | 490 W |
| Max. power: | 537 W |
| Fuse: | 4 A (T) |
| Connection: | 4 pole power connector 5 pole connector for signals |

Performance graph:

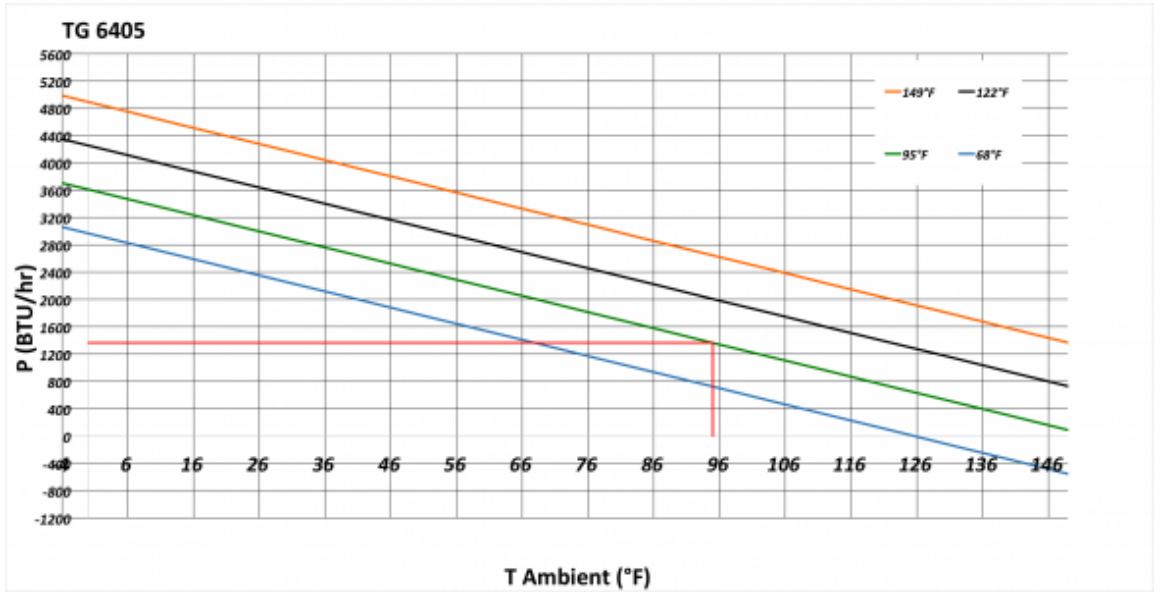

Cut out dimensions:

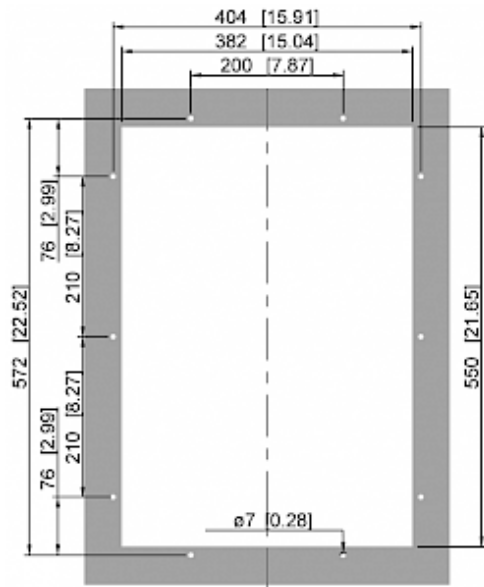

Order Information

| | |
|--|----------------------|
| Stainless steel AISI 316 (V4A) housing part no. | 64053254 |
| Verpackungsmaße | 686.6 x 454 x 232 mm |
| Bruttogewicht | 41 kg |
| Taric code | 84158300 |