

## Dachaufsatz Kühlgerät




## Description

<b>Order Number:</b>	952020001
<b>Brand Name:</b>	SLIMLINE PRO TOP
<b>Color:</b>	RAL 7035
<b>Housing Material:</b>	Mild steel, powder coated
<b>Ingress protection:</b>	NEMA 12
<b>Approvals:</b>	CE

## Technical data

<b>Cooling capacity 95F/95F:</b>	2100 W
<b>Cooling capacity 95F/122F:</b>	1600 W
<b>Compressor type:</b>	Rotary piston
<b>Refrigerant / GWP:</b>	R134a / 1430
<b>Refrigerant charge:</b>	465 g. / 16.4 oz.
<b>High / low pressure:</b>	28 / 6 bar 406 / 88 psi
<b>Operating temperature range:</b>	5°C - 55°C
<b>Air volume flow (system / unimpeded):</b>	Umgebungskreislauf: 1200 <sup>3</sup> /h Schrankkreislauf: 630 m <sup>3</sup> /h
<b>Mounting:</b>	Roof mounted
<b>Dimension H x W x D:</b>	435 x 595 x 475 mm
<b>Weight:</b>	40.1 kg
<b>Voltage / Frequency:</b>	400/460 V - 50/60 Hz 2~
<b>Current 95F95F:</b>	1.7 / 1.8 A
<b>Starting current:</b>	13 A
<b>Max. current:</b>	2.4 A
<b>Nominal power 95F95F:</b>	0.88 / 1.1 kW
<b>Max. power:</b>	1.6 kW
<b>Fuse:</b>	15 A (T)
<b>Short-circuit current rating:</b>	5 kA
<b>Connection:</b>	4 pole connector for power 5 pole connector for signals 3 pole connector for RS 485 MODBUS

**Cut out dimensions:**

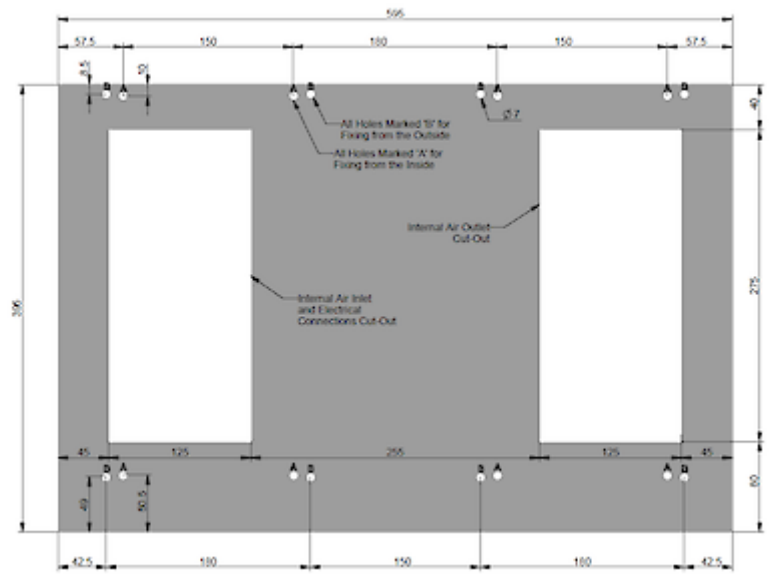

## Order Information

**Mit Edelstahlgehäuse Bestell Nr.**

95202002

**Zolltarifnummer**

84158200