

## Filterless enclosure air conditioner




### Description

<b>Order Number:</b>	4272202
<b>Brand Name:</b>	SLIMLINE
<b>Housing Material:</b>	Stainless steel AISI 304 (V2A)
<b>Ingress protection:</b>	TYPE 12
<b>Note:</b>	400 V / 3~ units do not need additional MP
<b>Approvals:</b>	CE / cURus


## Technical data

<b>Cooling capacity 95F/95F:</b>	4090 BTU
<b>Cooling capacity 95F/122F:</b>	2970 BTU
<b>Compressor type:</b>	Rotary piston compressor
<b>Refrigerant / GWP:</b>	R134a / 1430
<b>Refrigerant charge:</b>	360 g / 12.7 oz
<b>High / low pressure:</b>	37 / 9.6 bar 580 / 148 psig
<b>Operating temperature range:</b>	50°F - 131°F
<b>Air volume flow (system / unimpeded):</b>	Ambient air circuit: 253 / 706 cfm Cabinet air circuit: 118 / 324 cfm
<b>Mounting:</b>	Wall mounted / Recessed
<b>Dimension H x W x D:</b>	49.21 x 15.55 x 5.71 in.
<b>Weight:</b>	90 lbs.
<b>Cut out dimensions:</b>	48.46 x 14.80 in.
<b>Voltage / Frequency:</b>	380-415 V 50 Hz 3~ 400-460 V 60 Hz 3~
<b>Current 95F95F:</b>	1.6 A @ 50 Hz 1.5 A @ 60 Hz
<b>Starting current:</b>	8.2 A
<b>Max. current:</b>	1.8 A
<b>Nominal power 95F95F:</b>	830 W @ 50 Hz 850 W @ 60 Hz
<b>Max. power:</b>	1.04 kW
<b>Fuse:</b>	3 x 6 A (T)
<b>Max circuit ampacity:</b>	15 A
<b>Short-circuit current rating:</b>	5 kA
<b>Rated current compressor:</b>	8.2 A
<b>Full load current fans:</b>	3.2 A
<b>Connection:</b>	Connection terminal block


**Performance graph:**

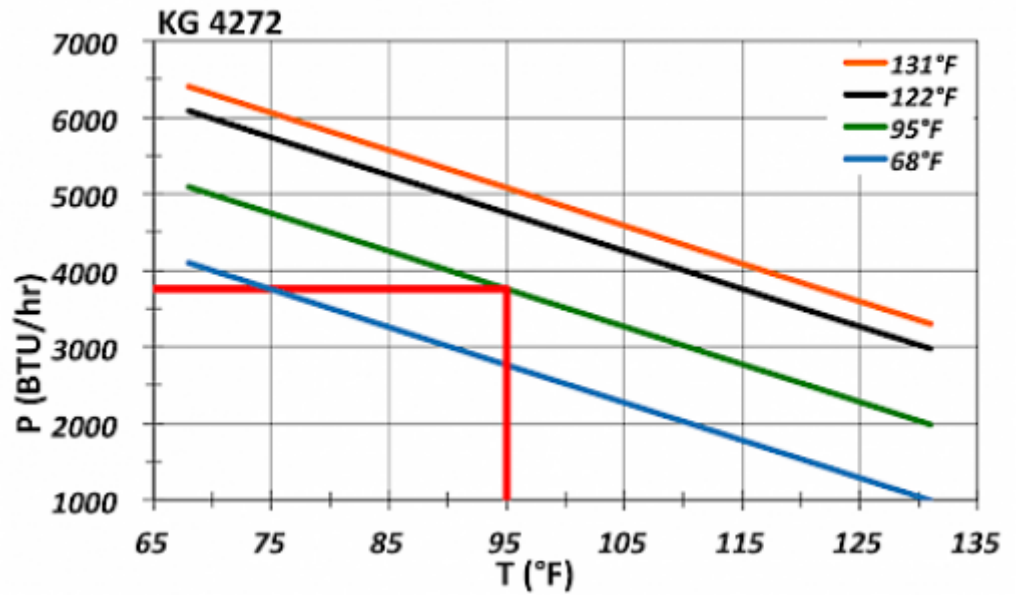

**Air flow:**

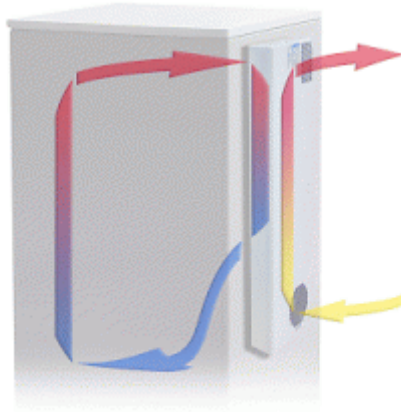

**Cut out dimensions:**

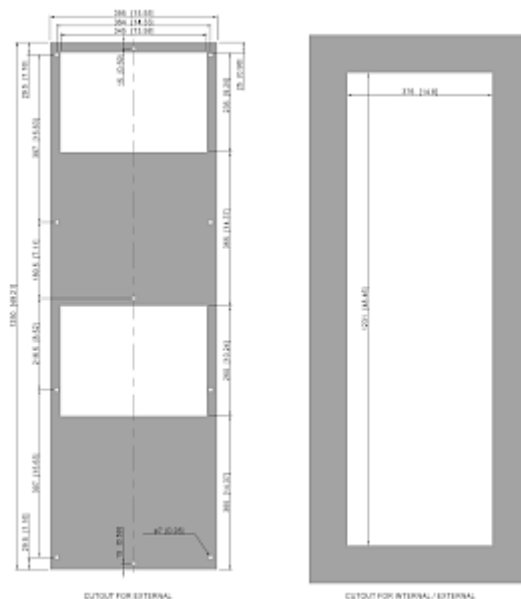

## Order Information

<b>Verpackungsmaße</b>	1,347 x 496 x 204 mm
<b>Bruttogewicht</b>	46.5 kg
<b>Zolltarifnummer</b>	84158200
<b>EAN Nummer</b>	5350604371224