

Air to air heat exchanger



Description


| | |
|----------------------------|---------------------------|
| Order Number: | 581000001 |
| Brand Name: | SLIMLINE HEX |
| Color: | RAL 7035 |
| Housing Material: | Mild steel, powder coated |
| Ingress protection: | IP 56 |
| Approvals: | CE |

Technical data


| | |
|--|--|
| Heat exchanger performance: | 55 W/°F |
| Operating temperature range: | -13°F - 149°F |
| Air volume flow (system / unimpeded): | Ambient air circuit: 310 / 590 cfm Cabinet air circuit: 295 / 590 cfm |
| Mounting: | Wall mounted |
| Dimension H x W x D: | 36 x 18.x 8.6 inch |
| Weight: | 56 lbs. |
| Voltage / Frequency: | 230 V ~ 50/60 Hz |
| Starting current: | 6 A |
| Max. current: | 2 A |
| Max. power: | 287 / 460 W |
| Fuse: | 4 A (T) |
| Connection: | 4 pole terminal block for electrical connection 5 pole terminal block for signals |

Performance graph:


T = Temperature difference between ambient and internal temperature
P = Heat exchanger performance

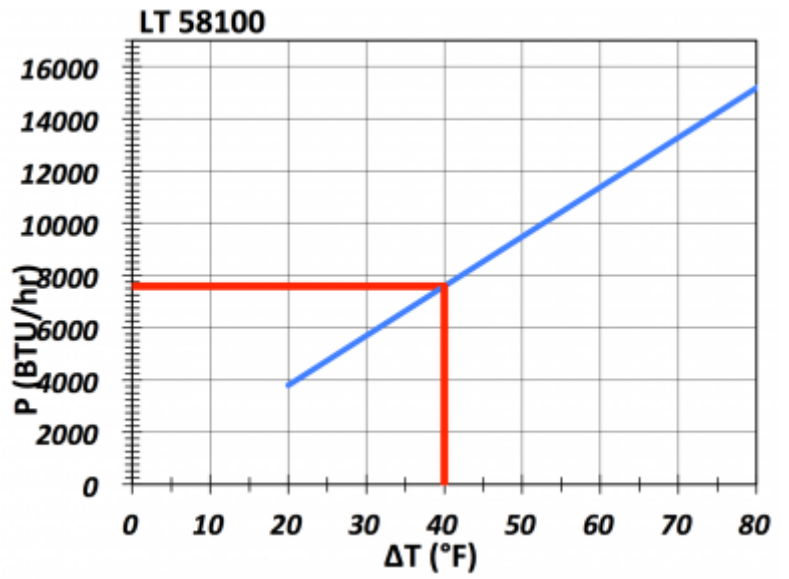

Air flow:

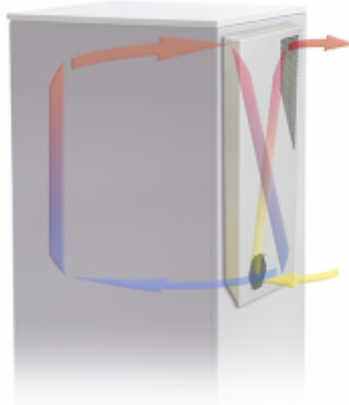

Cut out dimensions:

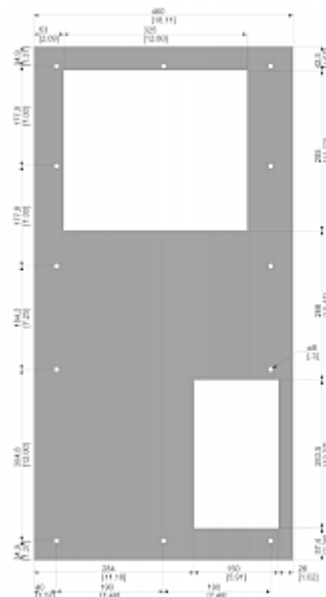

Order Information

| | |
|---|--------------------|
| Stainless steel housing part no. | 58100002 |
| Verpackungsmaße | 965 x 543 x 263 mm |
| Bruttogewicht | 30 kg |
| Taric code | 84158300 |
| GTIN (EAN) | 5350604200142 |