

Air / Water Heat Exchanger



Description


| | |
|----------------------------|---------------------------|
| Order Number: | 2125000 |
| Brand Name: | SLIMLINE HEX |
| Color: | RAL 7035 |
| Housing Material: | Mild steel, powder coated |
| Ingress protection: | NEMA 12 |
| Note: | Mit Magnetventil |
| Approvals: | CE |

Technical data


| | |
|--|--|
| Cooling capacity 95F/W50F (53 GPH): | 8530 BTU |
| Cooling capacity 95F/W50F (132 GPH): | 10750 BTU (only w/o water flow regulator) |
| Coolant: | Water, light oils or similar |
| Operating temperature range: | +34°F - +162°F |
| Air volume flow (system / unimpeded): | 294 / 692 cfm @ 50 Hz 311 / 765 cfm @ 60 Hz |
| Mounting: | Wall mounted / Internal |
| Dimension H x W x D: | 36.85 x 10.31 x 5.77 in. |
| Weight: | 39.68 lbs |
| Voltage / Frequency: | 230 V ~ 50/60 Hz |
| Starting current: | 1.2 A / 1.3 A |
| Max. current: | 0.7 A / 0.9 A |
| Max. power: | 200 W |
| Pressure water circuit: | 10 bar |
| Water connection: | Rp 1/4" - inside thread with 2 connectors for pipe internal diameter of 0.39 in. |
| Fuse: | 5 A (T) |
| Connection: | Connection terminals |

Performance graph:


ΔT = Temperature difference between enclosure air and coolant
 P = Cooling Capacity

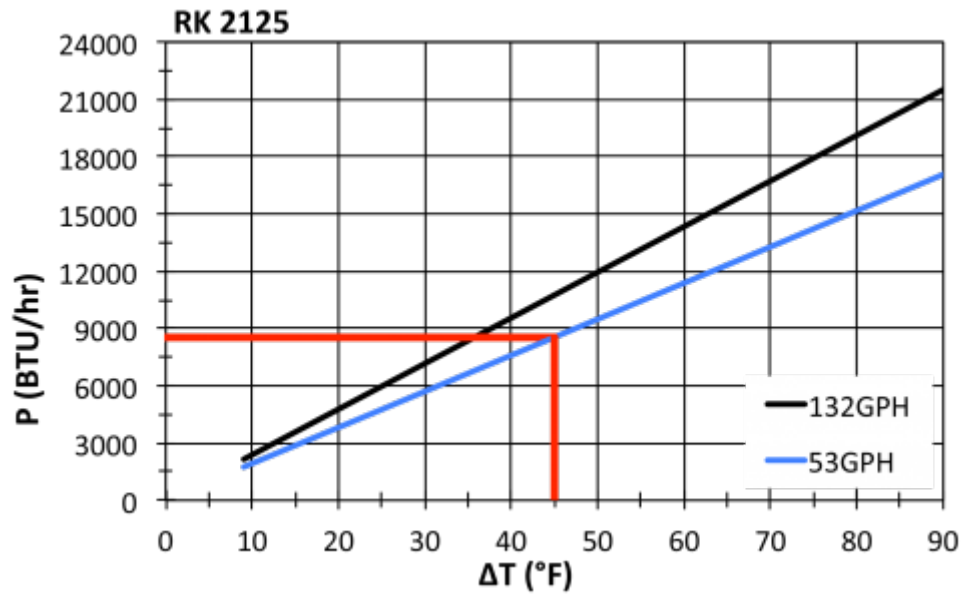

Air flow:

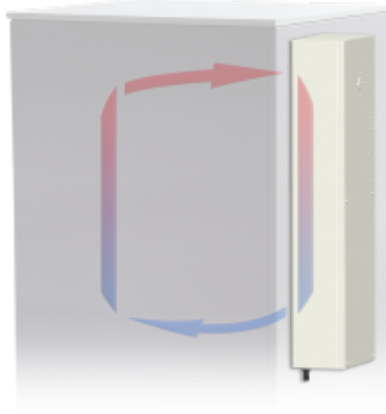

Cut out dimensions:

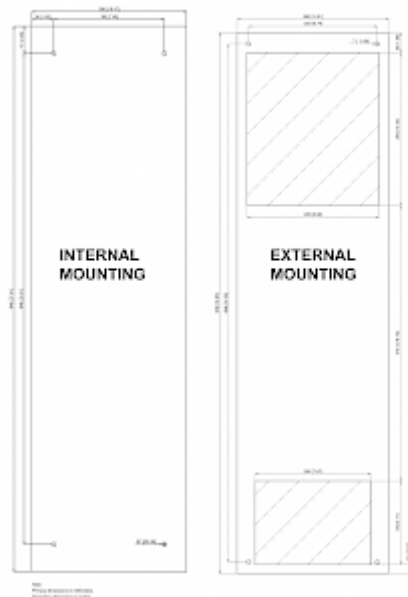

Order Information

| | |
|------------------------|-------------------------|
| Verpackungsmaße | 1033.6 x 279 x 183.5 mm |
| Bruttogewicht | 21 kg |
| Zolltarifnummer | 84158300 |
| EAN Nummer | 5350604210783 |