

## Filterless enclosure air conditioner



### Description

**Order Number:** 4271202

**Brand Name:** SLIMLINE

**Housing Material:** Stainless steel AISI 304 (V2A)

**Ingress protection:**TYPE 12


**Note:** Bei 400 V / 3~ Geräten ist kein zusätzlicher Mittelpunktleiter erforderlich.

**Approvals:** CE / cURus


## Technical data

<b>Cooling capacity 95F/95F:</b>	3020 BTU
<b>Cooling capacity 95F/122F:</b>	1810 BTU
<b>Compressor type:</b>	Rotary piston compressor
<b>Refrigerant / GWP:</b>	R134a / 1430
<b>Refrigerant charge:</b>	280 g / 9.9 oz
<b>High / low pressure:</b>	37 / 9.6 bar 406 / 148 psig
<b>Operating temperature range:</b>	50°F - 131°F
<b>Air volume flow (system / unimpeded):</b>	Ambient air circuit: 188 / 383 cfm Cabinet air circuit: 171 / 324 cfm
<b>Mounting:</b>	Wall mounted / Recessed
<b>Dimension H x W x D:</b>	38.58 x 15.55 x 5.71 in.
<b>Weight:</b>	84 lbs.
<b>Cut out dimensions:</b>	37.83 x 14.80 in.
<b>Voltage / Frequency:</b>	380-415 V 50 Hz 3~ 400-460 V 60 Hz 3~
<b>Current 95F95F:</b>	1.8 A @ 50 Hz 2.1 A @ 60 Hz
<b>Starting current:</b>	8.2 A
<b>Max. current:</b>	2.9 A
<b>Nominal power 95F95F:</b>	660 W @ 50 Hz 760 W @ 60 Hz
<b>Max. power:</b>	840 W
<b>Fuse:</b>	3 x 6 A (T)
<b>Max circuit ampacity:</b>	15 A
<b>Short-circuit current rating:</b>	5 kA
<b>Rated current compressor:</b>	8.2 A
<b>Full load current fans:</b>	2.9 A
<b>Connection:</b>	Connection terminal block


**Performance graph:**

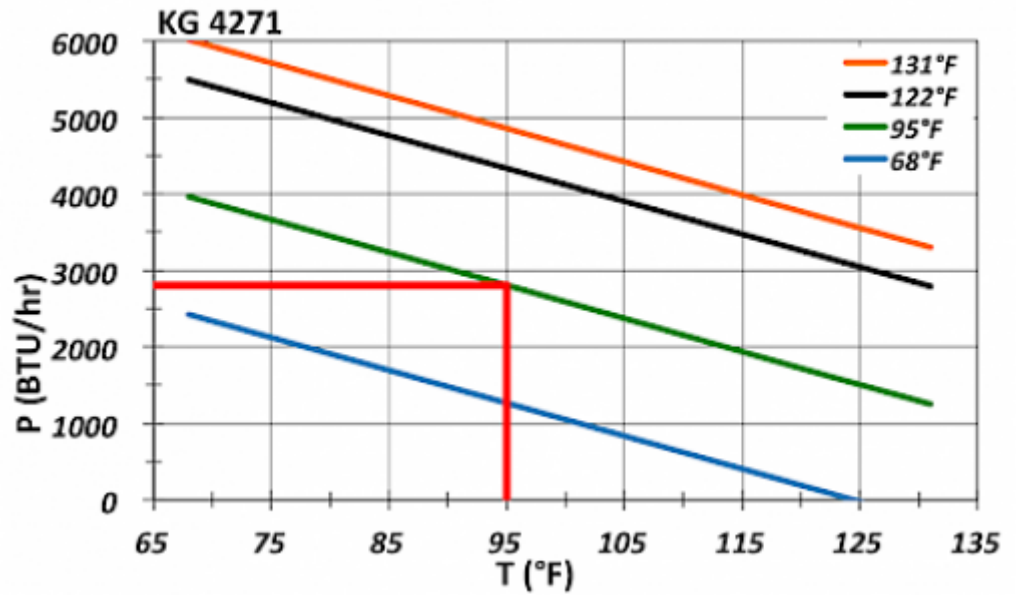

**Air flow:**

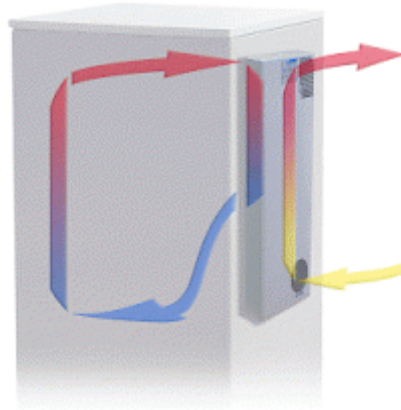

**Cut out dimensions:**

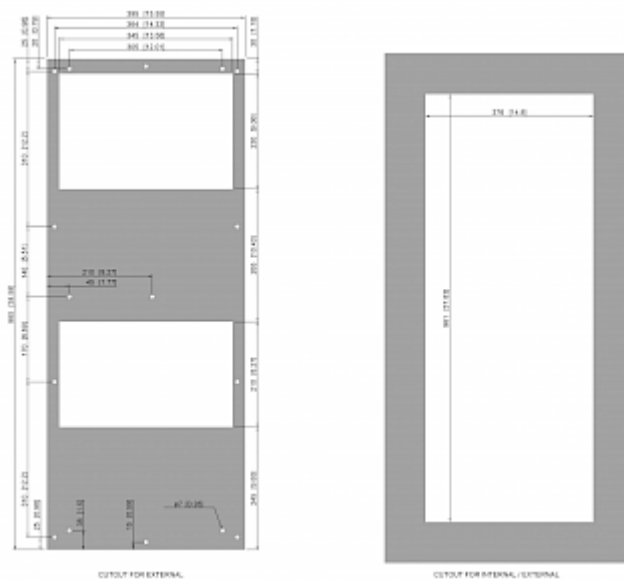

## Order Information

<b>Verpackungsmaße</b>	1074.5 x 496 x 204 mm
<b>Bruttogewicht</b>	38.5 kg
<b>Zolltarifnummer</b>	84158200
<b>EAN Nummer</b>	5350604371019