

## Enclosure air conditioner



## Description

<b>Order Number:</b>	851200S62
<b>Brand Name:</b>	SLIMLINE PRO
<b>Housing Material:</b>	Stainless steel AISI 304 (V2A)
<b>Ingress protection:</b>	IP 56 / Type 12, 3, 3R, 4, 4X
<b>Note:</b>	pat. D815,265
<b>Sk Hinweis:</b>	With cabinet heater With metal mesh filter
<b>Approvals:</b>	CE, cURus, cULus

## Technical data

<b>Cooling capacity 95F/95F:</b>	4100 BTU @ 50 Hz 4100 BTU @ 60 Hz
<b>Cooling capacity 95F/122F:</b>	3070 BTU @ 50 Hz 3070 BTU @ 60 Hz
<b>EER 95F95F:</b>	1.68
<b>Compressor type:</b>	Rotary piston
<b>Refrigerant / GWP:</b>	R134a / 1430
<b>Refrigerant charge:</b>	220 g / 7.8 oz
<b>High / low pressure:</b>	30 / 6 bar 435 / 87 psi
<b>Operating temperature range:</b>	50°F - 140°F
<b>UL temperature range:</b>	50°F - 140°F
<b>Air volume flow (system / unimpeded):</b>	Ambient air circuit: 176 / 323 cfm Cabinet air circuit: 206 / 323 cfm
<b>Mounting:</b>	Wall mounted / recessed
<b>Dimension H x W x D:</b>	37.5 x 12.1 x 8.3 inch
<b>Weight:</b>	66 lbs.
<b>Voltage / Frequency:</b>	230 V ~ 50/60 Hz
<b>UL Voltage / Frequency:</b>	230 V ~ 60 Hz
<b>Current 95F95F:</b>	3.3 A @ 50 Hz 3.6 A @ 60 Hz
<b>Starting current:</b>	15 A
<b>Max. current:</b>	5 A
<b>Nominal power 95F95F:</b>	715 W @ 50 Hz 830 W @ 60 Hz
<b>Max. power:</b>	1.15 kW
<b>Fuse:</b>	15 A (T)
<b>Max circuit ampacity:</b>	15 A
<b>Short-circuit current rating:</b>	5 kA
<b>Rated current compressor:</b>	2.5 A

**Full load current fans:**

0.7 A

---

**Connection:**


4 pole terminal for power

5 pole terminal for signals


3 pole terminal for RS 485

---

**Performance graph:**

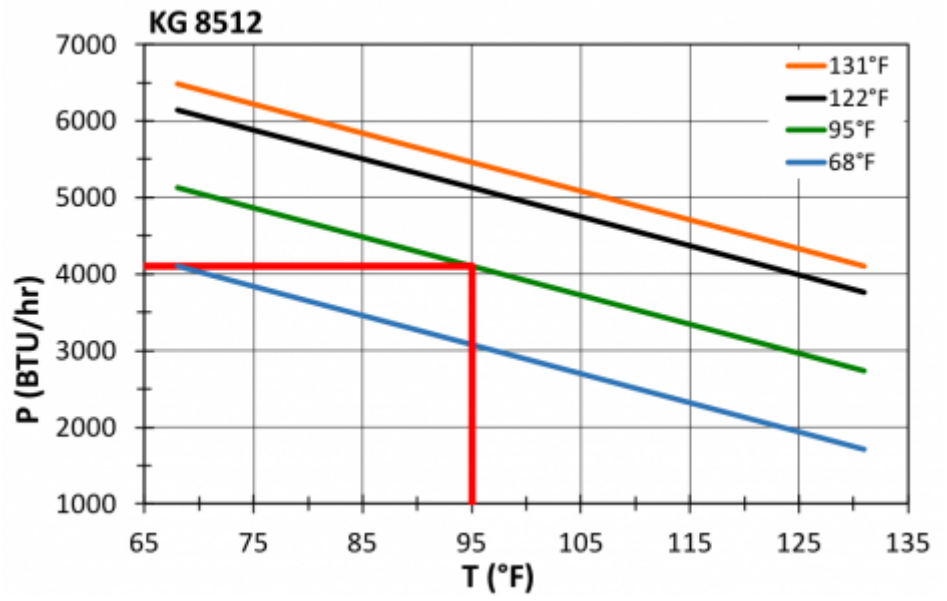

**Cut out dimensions:**

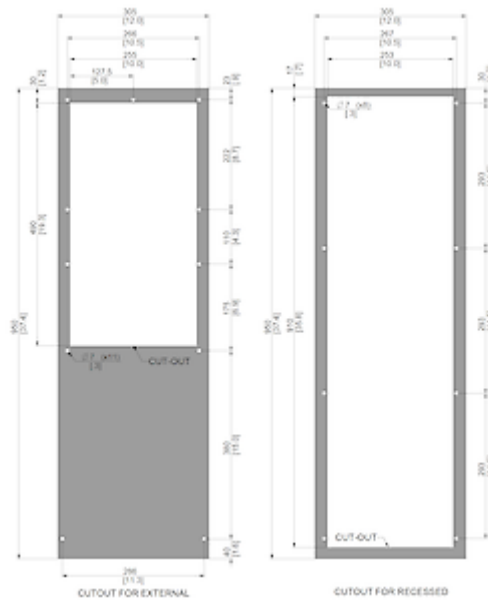

## Order Information

<b>Verpackungsmaße</b>	1042 x 405 x 242 mm
<b>Bruttogewicht</b>	34 Kg
<b>Zolltarifnummer</b>	84158200