

Enclosure air conditioner




Description

Order Number:	43252001
Brand Name:	COMPACT INDOOR
Color:	RAL 7035
Housing Material:	Mild steel, powder coated
Ingress protection:	TYPE 12
Approvals:	CE, cURus, cULus


Technical data

Cooling capacity 95F/95F:	8560 BTU
Cooling capacity 95F/122F:	7160 BTU
Compressor type:	Rotary piston compressor
Refrigerant / GWP:	R134a / 1430
Refrigerant charge:	850 g / 30 oz
High / low pressure:	29.5 / 6 bar 425 / 88 psig
Operating temperature range:	50°F - 131°F
Air volume flow (system / unimpeded):	Ambient air circuit: 441 / 706 cfm Cabinet air circuit: 323 / 706 cfm
Mounting:	External
Dimension H x W x D:	48.4 x 19.7 x 13.4 inch
Weight:	161 lbs.
Cut out dimensions:	44.48 x 16.92 inch
Voltage / Frequency:	400/460 V - 50/60 Hz 2~
UL Voltage / Frequency:	400/460 V ~ 60 Hz 2~
Current 95F95F:	2.9 A @ 50 Hz 2.6 A @ 60 Hz
Starting current:	6.1 A / 6.8 A
Max. current:	3.8 A / 3.2 A
Nominal power 95F95F:	940 W @ 50 Hz 1.18 kW @ 60 Hz
Max. power:	1.25 kW @ 50 Hz 1.46 kW @ 60 Hz
Fuse:	2 x 6 A (T)
Short-circuit current rating:	5 kA
Connection:	Connection terminal block


Performance graph:

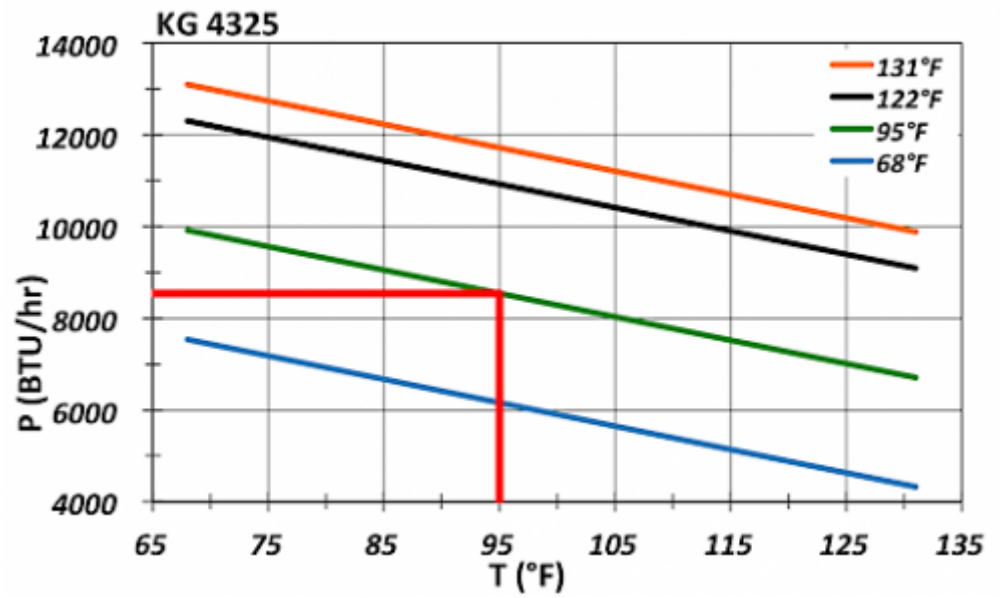

Air flow:

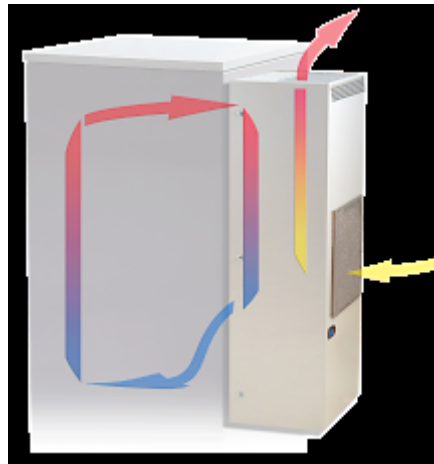

Cut out dimensions:

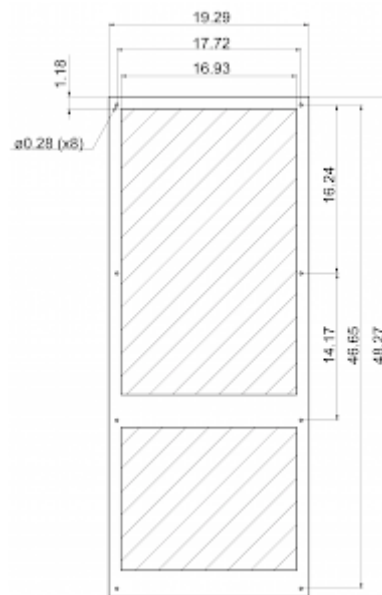

Order Information

Stainless steel housing part no.	4325202
Mit Kondensatverdunstung Bestell Nr.	43252101
Verpackungsmaße	1,265 x 543 x 375 mm
Bruttogewicht	77 kg
Taric code	84158200