

Enclosure air conditioner type 4X




Description

Order Number:	57200182
Brand Name:	Compact Outdoor
Housing Material:	Stainless steel AISI 304 (V2A)
Ingress protection:	IP 56 / Type 12, 3, 3R, 4, 4X
Included:	Mit Schaltschrankheizung und Aluminium Filter
Approvals:	CE, cURus, cULus
UL File Number:	cURus (SA32278), cULus (E498756)


Technical data

Cooling capacity 95F/95F:	6825 BTU
Cooling capacity 95F/122F:	5460 BTU @ 50 Hz 5460 BTU @ 60 Hz
Enclosure heater:	1000 W
Compressor type:	Rotary piston compressor
Refrigerant / GWP:	R134a / 1430
Refrigerant charge:	460 g / 16.2 oz
High / low pressure:	29.3 / 6.1 bar 425 / 88 psig
Operating temperature range:	-40°F - 131°F
Air volume flow (system / unimpeded):	Ambient air circuit: 385 / 706 cfm Cabinet air circuit: 235 / 500 cfm
Mounting:	Wall mounted
Dimension H x W x D:	45.2 x 15.5 x 10.6 inch
Weight:	106 lbs.
Voltage / Frequency:	230 V ~ 50/60 Hz
UL Voltage / Frequency:	230 V ~ 60 Hz
Current 95F95F:	5.5 A @ 50 Hz 6.5 A @ 60 Hz
Starting current:	16 A
Max. current:	7.9 A
Nominal power 95F95F:	1,17 kW @ 50 Hz 1,41 kW @ 60 Hz
Max. power:	1,65 kW @ 50 Hz 2,10 kW @ 60 Hz
Fuse:	13 A (T)
Short-circuit current rating:	5 kA
Connection:	Connection terminal block

Performance graph:

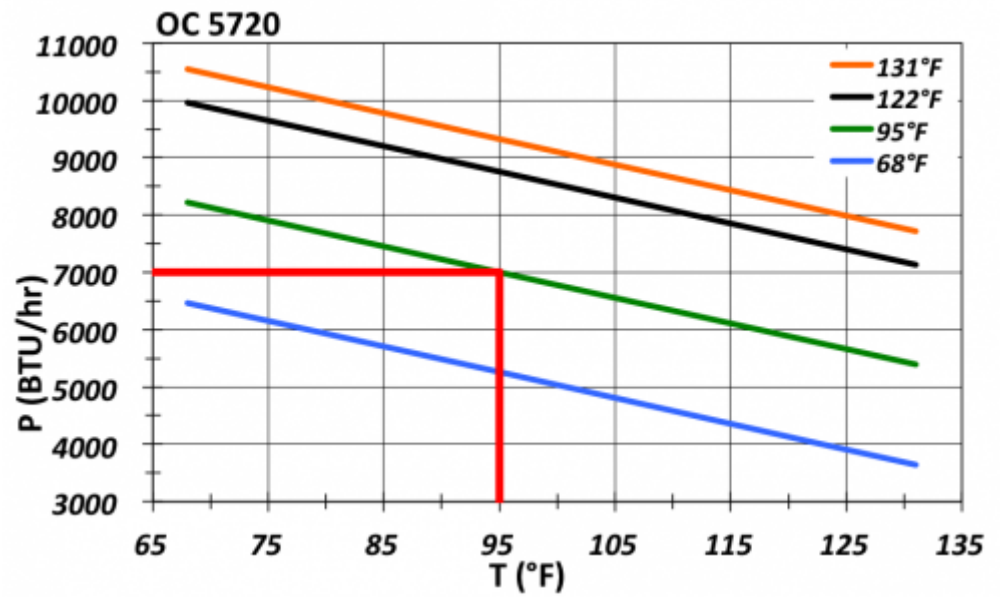

Cut out dimensions:

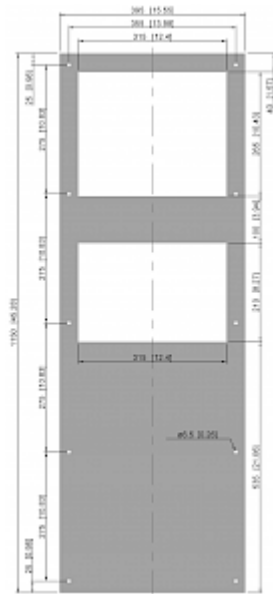

Order Information

In Edelstahl 316 (V4A) Bestell Nr.	57200184
Verpackungsmaße	1,190 x 443 x 310 mm
Bruttogewicht	52 kg
Zolltarifnummer	84158200