

Enclosure air conditioner



Description


Order Number:	851200S62
Brand Name:	SLIMLINE PRO
Housing Material:	Stainless steel AISI 304 (V2A)
Ingress protection:	IP 56 / Type 12, 3, 3R, 4, 4X
Note:	pat. D815,265
Sk Hinweis:	With cabinet heater With metal mesh filter
Approvals:	CE, cURus, cULus

Technical data


Cooling capacity 95F/95F:	4100 BTU @ 50 Hz 4100 BTU @ 60 Hz
Cooling capacity 95F/122F:	3070 BTU @ 50 Hz 3070 BTU @ 60 Hz
EER 95F95F:	1.68
Compressor type:	Rotary piston
Refrigerant / GWP:	R134a / 1430
Refrigerant charge:	220 g / 7.8 oz
High / low pressure:	30 / 6 bar 435 / 87 psi
Operating temperature range:	50°F - 140°F
UL temperature range:	50°F - 140°F
Air volume flow (system / unimpeded):	Ambient air circuit: 176 / 323 cfm Cabinet air circuit: 206 / 323 cfm
Mounting:	Wall mounted / recessed
Dimension H x W x D:	37.5 x 12.1 x 8.3 inch
Weight:	66 lbs.
Voltage / Frequency:	230 V ~ 50/60 Hz
UL Voltage / Frequency:	230 V ~ 60 Hz
Current 95F95F:	3.3 A @ 50 Hz 3.6 A @ 60 Hz
Starting current:	15 A
Max. current:	5 A
Nominal power 95F95F:	715 W @ 50 Hz 830 W @ 60 Hz
Max. power:	1.15 kW
Fuse:	15 A (T)
Max circuit ampacity:	15 A
Short-circuit current rating:	5 kA
Rated current compressor:	2.5 A

Full load current fans:	0.7 A
Connection:	4 pole terminal for power 5 pole terminal for signals 3 pole terminal for RS 485

Performance graph:

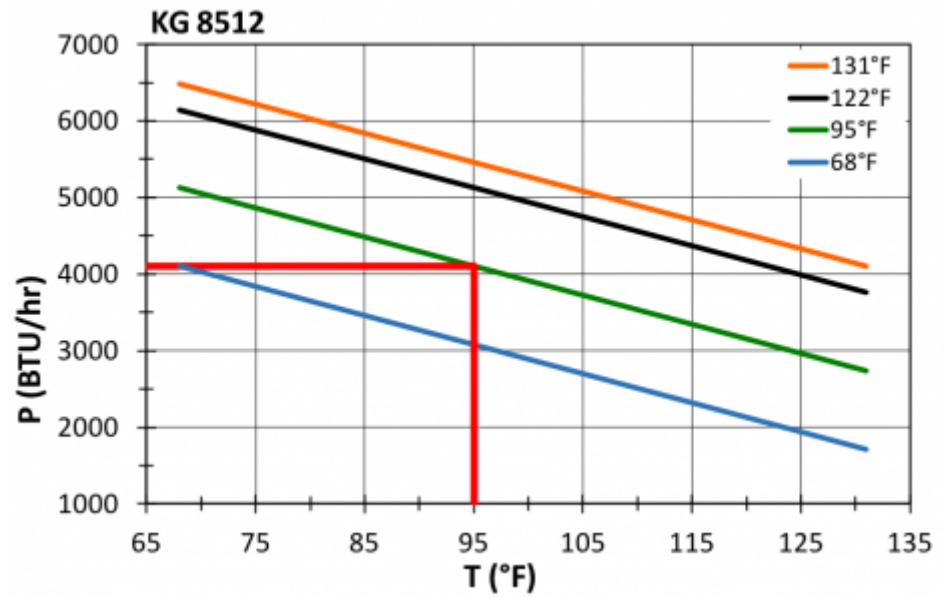

Cut out dimensions:

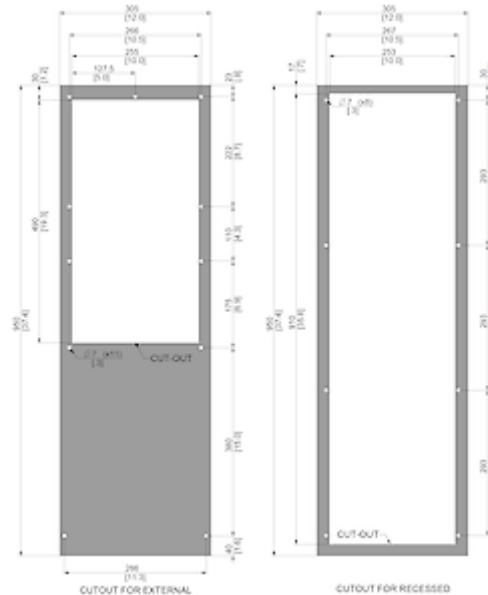

Order Information

Verpackungsmaße	1042 x 405 x 242 mm
Bruttogewicht	34 Kg
Zolltarifnummer	84158200