

## Roof mounted filter fan



## Description

<b>Order Number:</b>	6064D2000
<b>Brand Name:</b>	SOLIFLEX
<b>Colour:</b>	RAL 7035
<b>Housing Material:</b>	Mild steel, powder coated
<b>IP protection class to EN 60 529:</b>	IP 54, Type 1, 12
<b>Included:</b>	G3 filters
<b>Optional:</b>	Aluminium filter kit Temperature control thermostat Alarm thermostat
<b>Approvals:</b>	CE, cURus

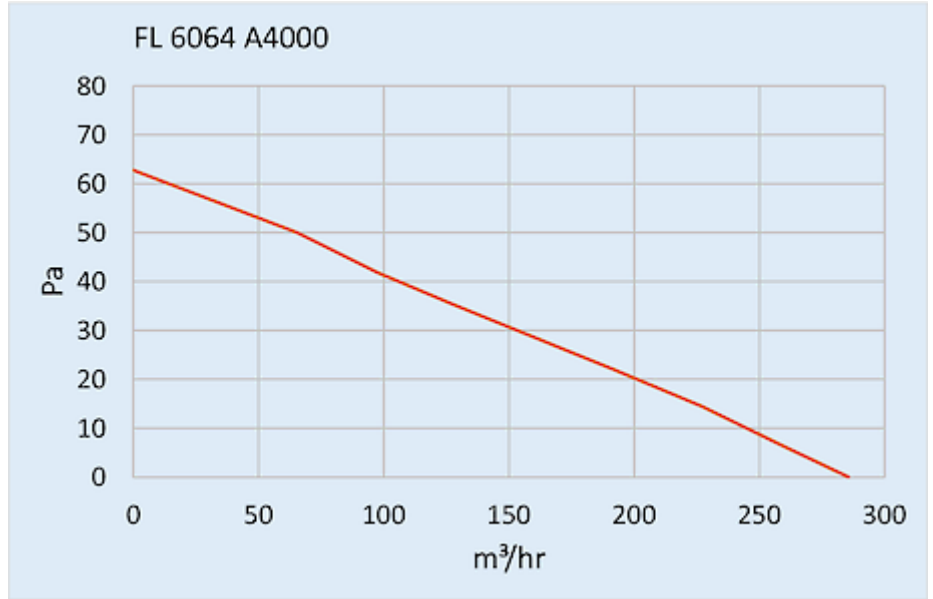
## Technical Data

<b>Air flow volume (system / unimpeded):</b>	320 m <sup>3</sup> /h
<b>Air flow unimpeded IP 54:</b>	275 m <sup>3</sup> /h
<b>Operating Temperature Range:</b>	-10°C - 55°C
<b>Static pressure:</b>	79 Pa
<b>Mounting:</b>	top mounted
<b>Dimensions A x B x C (D+E):</b>	147 x 457 x 457 mm
<b>Weight:</b>	5.8 kg
<b>Cut out dimensions:</b>	291 x 291 mm
<b>Voltage / Frequency:</b>	24 V DC
<b>Rated current:</b>	0.84 A
<b>Power consumption:</b>	20 W
<b>Degree of separation IP 54:</b>	85% - DIN 24185
<b>Filter class (ISO 16890):</b>	G3 (Aluminium optional)
<b>Noise level:</b>	51 dB(A)
<b>Connection:</b>	4 pole connector (provided)

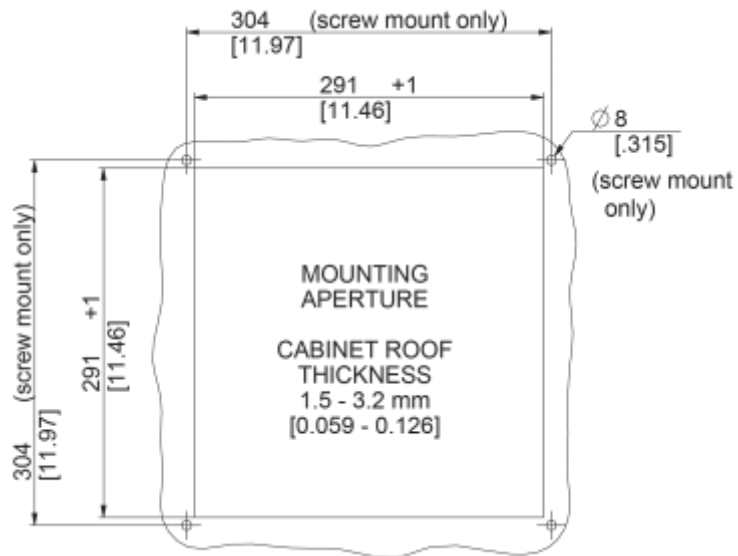
Please click on the graphics to download.

More CAD drawings can be found under [Product Download](#).

> [Overview Product Group SOLIFLEX - Filter fans & exhaust filters](#)

**Performance graph:**


click image to enlarge

**Cut Out Dimension:**


click image to enlarge

## Order Information

<b>Taric code</b>	84145915
<b>GTIN (EAN)</b>	5350604100893