

## Filter Fan



## Description

<b>Order Number:</b>	4210D2100
<b>Brand Name:</b>	SOLIFLEX
<b>Colour:</b>	RAL 7035
<b>Housing Material:</b>	ABS Plastic
<b>Ingress Protection:</b>	IP 54
<b>Note:</b>	Reverse air flow
<b>Optional:</b>	Different housing colors available on request
<b>Approvals:</b>	CE, cURus, cULus, CSA

### Accessories:



[Hose-proof protection hood FC 4000 100](#)



[Hose-proof protection hood FC 4000 100 FDA](#)

## Technical Data

<b>Operating Temperature Range:</b>	-10°C - 55°C
<b>Air flow unimpeded:</b>	64 m <sup>3</sup> /h
<b>Static pressure:</b>	79 Pa
<b>Dimensions A x B x C (D+E):</b>	150 x 150 x 73 mm
<b>Weight:</b>	0.5 kg
<b>Cut out dimensions:</b>	124 x 124 (+1.5) mm
<b>Voltage / Frequency:</b>	24 V DC
<b>Rated current:</b>	0.31 A
<b>Power consumption:</b>	7.4 W
<b>Degree of separation:</b>	85% - DIN 24185
<b>Wall thickness:</b>	1 - 2.1 mm
<b>Filter class:</b>	G3 according to EN 779
<b>Installation:</b>	Elastic clips
<b>Noise level:</b>	48 dB(A)

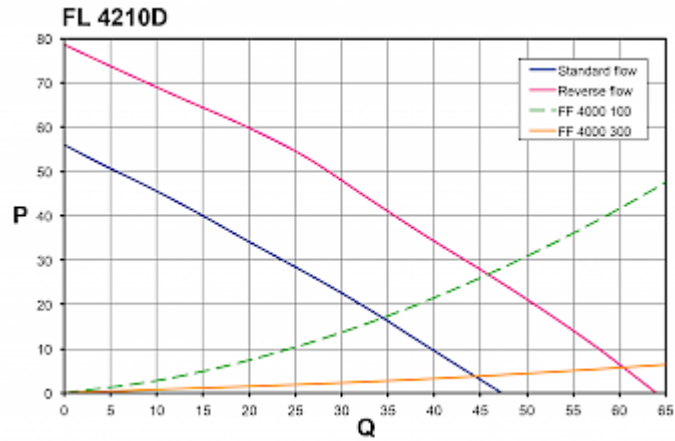
Please click on the graphics to download.

More CAD drawings can be found under [Product Download](#).

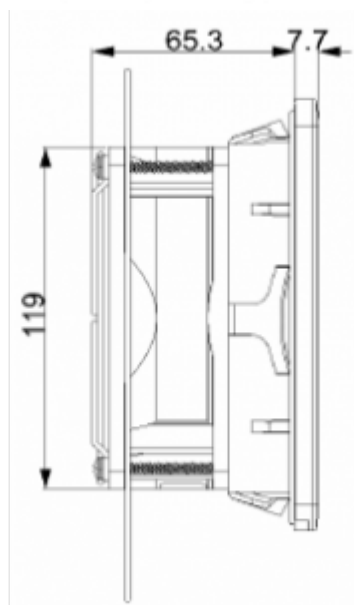
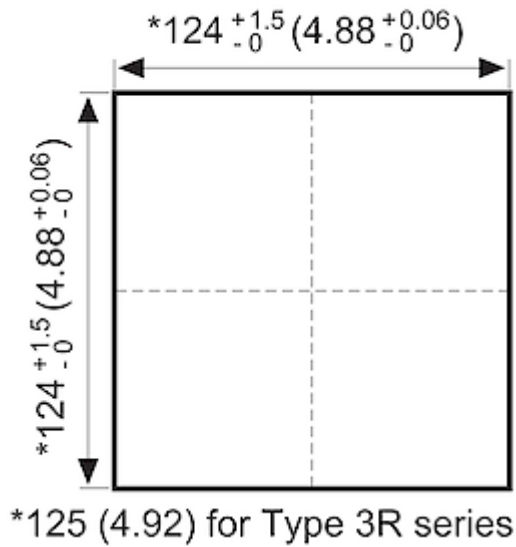
> [Overview Product Group SOLIFLEX - Filter fans & exhaust filters](#)

**Air flow:**

Q = Air flow [m<sup>3</sup>/h]  
 P = Static pressure [Pa]



[click image to enlarge](#)

**Cut Out Dimension:**


[click image to enlarge](#)

## Order Information

<b>In RAL 9005</b>	4210D2103
<b>Taric code</b>	84145915
<b>GTIN (EAN)</b>	5350604100275