


## Thermoelectric cooling unit



### Description

<b>Order Number:</b>	3200310
<b>Brand Name:</b>	SoliTherm Peltier
<b>Housing Material:</b>	Stainless steel AISI 304 (V2A)
<b>IP protection class to EN 60 529:</b>	IP 66
<b>Note:</b>	The torque for the mounting nuts should be 4.5 Nm.
<b>Approvals:</b>	CE, cURus
<b>Accessories:</b>	 <a href="#">Condensate Kit 3152 / 3200</a>

## Technical Data

<b>Cooling capacity L35L35 (EN14511-3):</b>	200 W
<b>Operating Temperature Range:</b>	-20°C - 70°C
<b>UL temperature range:</b>	-20°C - 65°C
<b>Air flow volume (system / unimpeded):</b>	Ambient air circuit: 120 / 260 m <sup>3</sup> /h Cabinet air circuit: 120 / 260 m <sup>3</sup> /h
<b>Mounting:</b>	Wall mounted (with frame)
<b>Dimensions A x B x C (D+E):</b>	500 x 188 x 172 mm
<b>Weight:</b>	13.7 kg
<b>Cut out dimensions:</b>	469 x 155 mm
<b>Voltage / Frequency:</b>	48 V DC
<b>Current L35L35:</b>	4.7 A
<b>Starting current:</b>	9.5 A
<b>Max. current:</b>	7.5 A
<b>Nominal power L35L35:</b>	270 W
<b>Max. power:</b>	360 W
<b>Fuse:</b>	10 A (T)
<b>Connection:</b>	Connection terminal block


Please click on the graphics to download.

More CAD drawings can be found under [Product Download](#).


> [Overview Product Group SOLITHERM PELTIER - cooling without refrigerant](#)

**Performance graph:**

**T = Ambient temperature**  
**P = Cooling capacity**

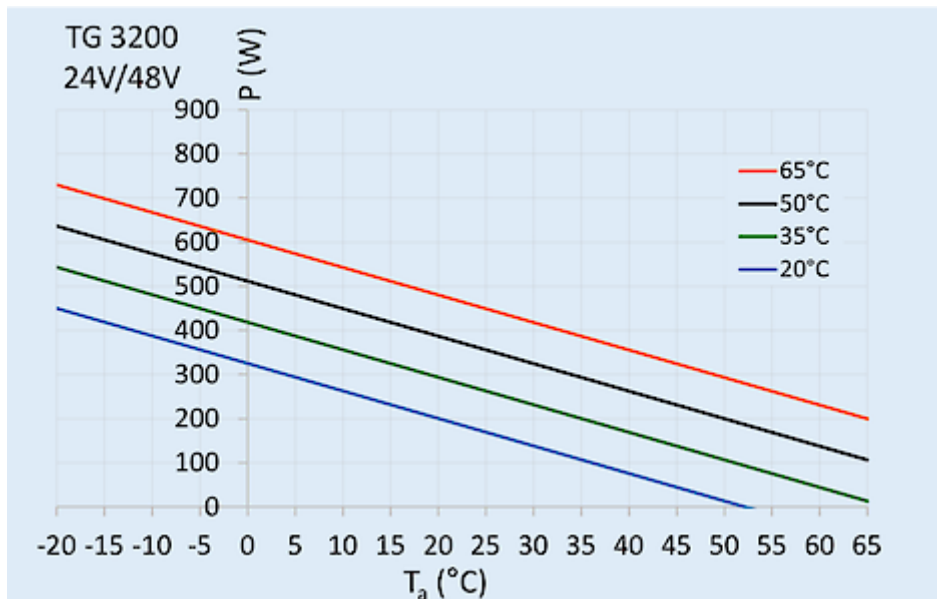


click image to enlarge

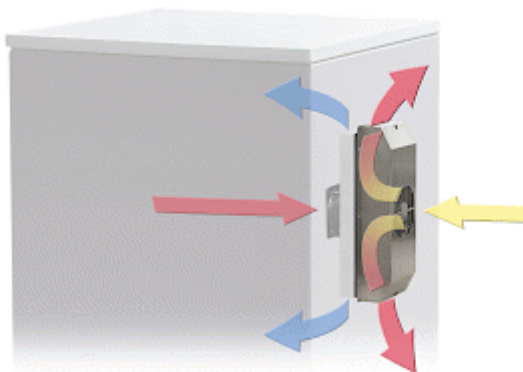**Air flow:**


click image to enlarge

**Cut Out Dimension:**

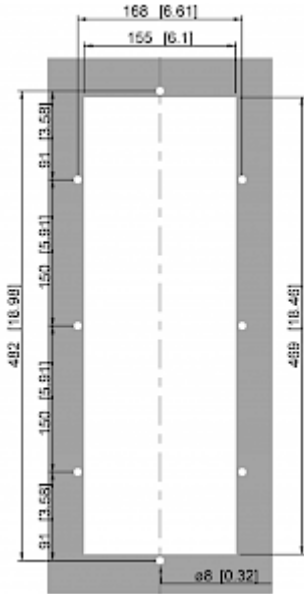

click image to enlarge

## Order Information

<b>Stainless steel AISI 316 (V4A) housing part no.</b>	32003104
<b>Box dimension</b>	486.6 x 205 x 183.5 mm
<b>Gross weight</b>	15.7 kg
<b>Taric code</b>	84158300