

Dachaufsatz Kühlgerät




Description

| | |
|----------------------------|---------------------------|
| Order Number: | 950800001 |
| Brand Name: | SLIMLINE PRO TOP |
| Color: | RAL 7035 |
| Housing Material: | Mild steel, powder coated |
| Ingress protection: | NEMA 12 |
| Approvals: | CE |

Technical data

| | |
|--|--|
| Cooling capacity 95F/95F: | 850 W |
| Cooling capacity 95F/122F: | 600 W |
| Compressor type: | Rotary piston |
| Refrigerant / GWP: | R134a / 1430 |
| Refrigerant charge: | 140 g / 4.94 oz. |
| High / low pressure: | 28 / 6 bar 406 / 87 psig |
| Operating temperature range: | 5°C - 55°C |
| Air volume flow (system / unimpeded): | Umgebungskreislauf: 850 m ³ /h Schrankkreislauf: 645 m ³ /h |
| Mounting: | Roof mounted |
| Dimension H x W x D: | 368 x 400 x 325 mm |
| Weight: | 32 kg |
| Voltage / Frequency: | 230 V ~ 50/60 Hz |
| Current 95F95F: | 2.3 / 2.5 A |
| Starting current: | 6.0 A |
| Max. current: | 3.1 A |
| Nominal power 95F95F: | 505 W |
| Fuse: | 15 A (T) |
| Short-circuit current rating: | 5 kA |
| Connection: | 4 pole connector for power 5 pole connector for signals 3 pole connector for RS 485 MODBUS |

Cut out dimensions:

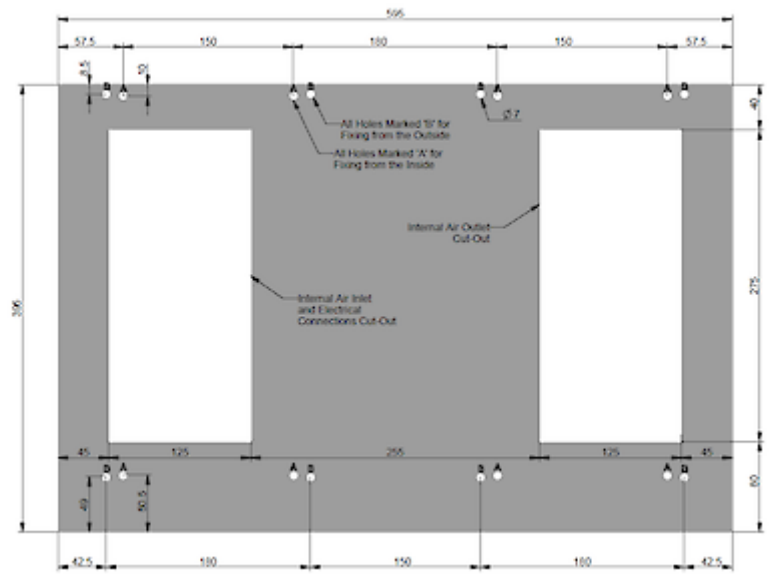

Order Information

| | |
|---|----------|
| Mit Edelstahlgehäuse Bestell Nr. | 95080002 |
| Zolltarifnummer | 84158200 |